


BC817BS

Dual NPN Small Signal Transistor

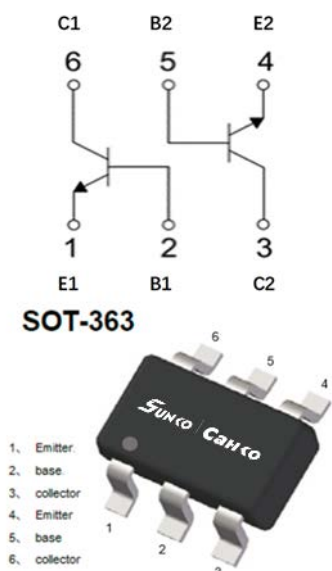

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-363
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				6Ct
Collector-base voltage	V_{CBO}	V	$I_C=10\mu\text{A}$, $I_E=0$	50
Collector-emitter voltage	V_{CEO}	V	$I_C=10\text{mA}$, $I_B=0$	45
Emitter-base voltage	V_{EBO}	V	$I_E=1\mu\text{A}$, $I_C=0$	5
Collector current	I_C	mA		500
Power dissipation	P_D	mW		300
Operation junction temperature	T_j	$^{\circ}\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150

BC817BS

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V _{(BR)CBO}	V	I _C =10uA, I _E =0	50		
Collector-emitter breakdown voltage	V _{(BR)CEO}	V	I _C =10mA, I _B =0	45		
Emitter-base breakdown voltage	V _{(BR)EBO}	V	I _E =1uA, I _C =0	5		
Collector cut-off current	I _{CBO}	uA	V _{CB} =45V			0.1
Emitter-base cutoff current	I _{EBO}	uA	V _{EB} =4V			0.1
DC current gain	h _{FE}		I _C =100mA, V _{CE} =1.0V	250		600
			I _C =500mA, V _{CE} =1.0V	40		
Collector-emitter saturation voltage	V _{CE(sat)}	V	I _C =500mA, I _B =50mA			0.7
Base-emitter saturation voltage	V _{BE(sat)}	V	I _C =500mA, I _B =50mA			1.2
Transition frequency	f _T	MHz	I _C =10mA, V _{CE} =5.0V, f=100MHz	100		
Collector-base output capacitance	Cob	pF	V _{CB} =10V, I _E =0A, f=1MHz		10	

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} ⁽¹⁾	°C/W	417
Thermal resistance, junction-to-case	R _{θJ-C} ⁽¹⁾	°C/W	333

Note:

(1) Device mounted on PCB, single-sided copper, with standard footprint

BC817BS

■ Characteristics

Fig 1: Static Characteristics

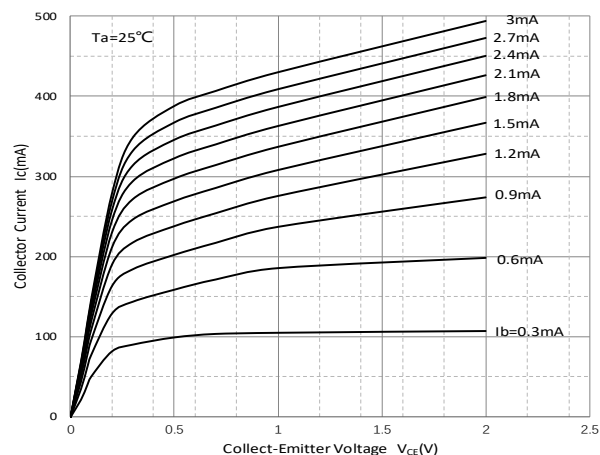


Fig 2: DC Current Gain Characteristics

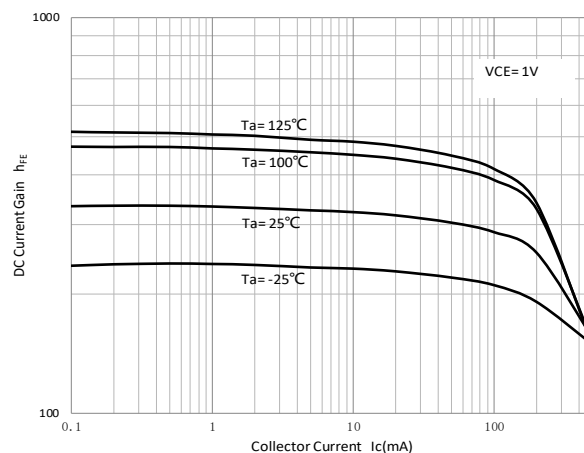


Fig 3: Collector-Emitter Saturation Voltage

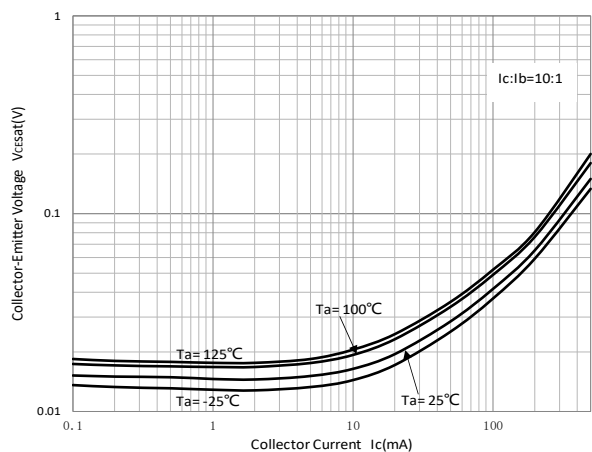


Fig 4: Base-Emitter Saturation Voltage

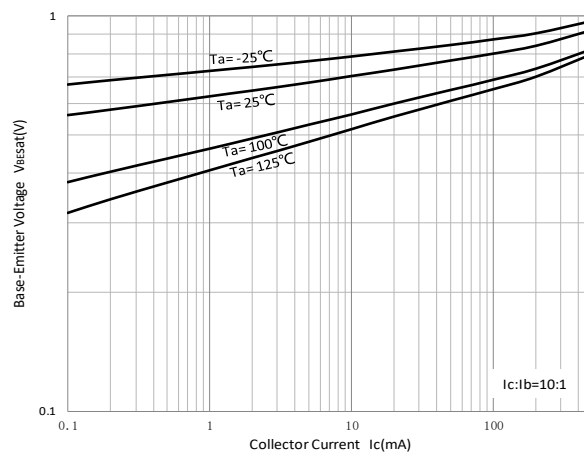


Fig 5: Base-emitter on voltage



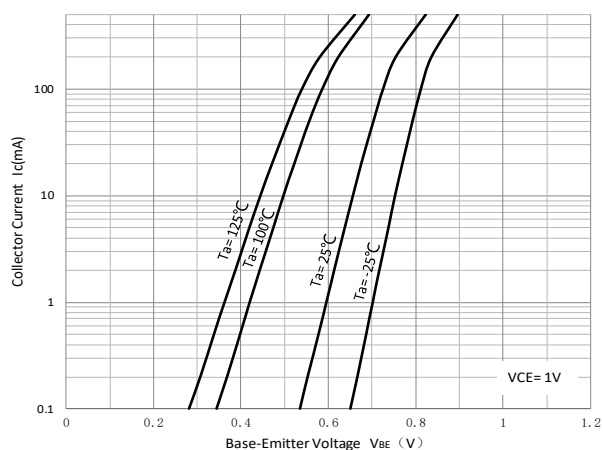


Fig 6: Cob/Cib-Vcb/Veb

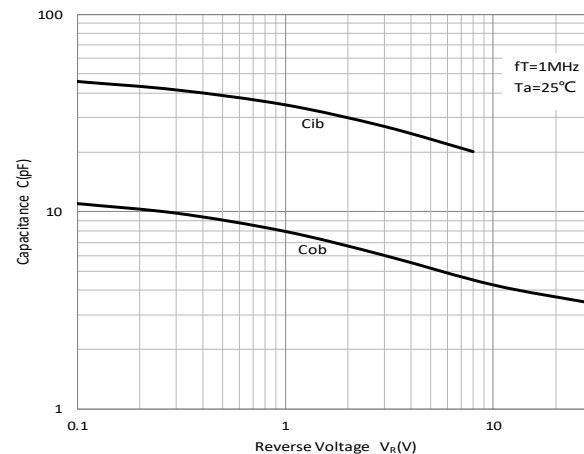

BC817BS

Fig 7: P_D - T_a Curve

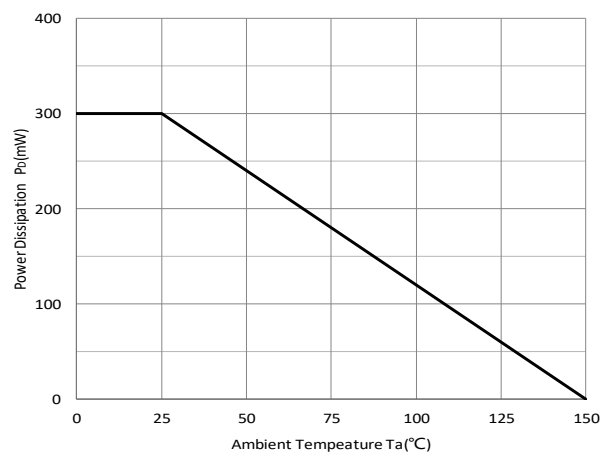


BC817BS

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC817BS	F2	Approximate 0.009	3000	30000	120000	7" reel
BC817BS	F3	Approximate 0.009	10000	/	210000	7" reel

■ Outline Dimensions

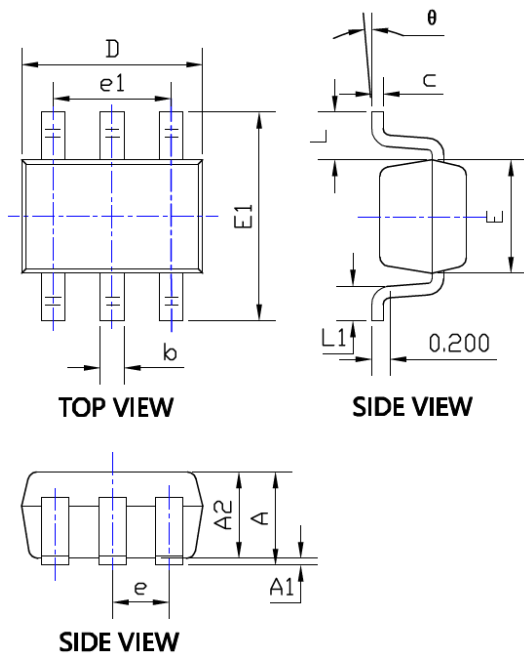

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.043	0.900	1.100
A1	0.000	0.004	0.000	0.100
A2	0.035	0.039	0.900	1.000
b	0.006	0.014	0.150	0.350
c	0.004	0.010	0.100	0.250
D	0.071	0.087	1.800	2.200
E	0.045	0.053	1.150	1.350
E1	0.085	0.096	2.150	2.450
e	0.026TYP		0.650TYP	
e1	0.047	0.055	1.200	1.400
L	0.021REF		0.525REF	
L1	0.010	0.018	0.260	0.460
θ	0°	8°	0°	8°

■ Suggested Pad Layout

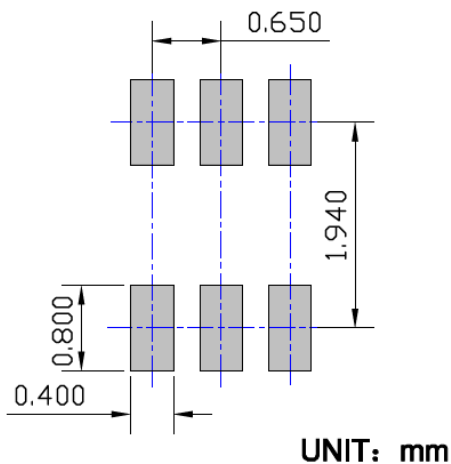

BC817BS

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.