



BC856AM3 THRU BC858CM3

PNP Transistor



1. Base
2. Emitter
3. Collector

SOT-723

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-723
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions		Value
Device marking code			BC856AM3		3A
			BC856BM3		3B
			BC857AM3		3E
			BC857BM3		3F
			BC857CM3		3G
			BC858AM3		3J
			BC858BM3		3K
			BC858CM3		3L
Collector-base voltage	V_{CBO}	V	BC856	$I_C=-10\mu\text{A},$ $I_E=0$	-80
			BC857		-50
			BC858		-30
Collector-emitter voltage	V_{CEO}	V	BC856	$I_C=-10\text{mA},$ $I_B=0$	-65
			BC857		-45
			BC858		-30

BC856AM3 THRU BC858CM3

Item	Symbol	Unit	Conditions	Value
Emitter-base voltage	V_{EBO}	V	$I_E = -1\mu A, I_C = 0$	-5
Collector current	I_C	mA		-100
Power dissipation	P_D	mW		100
Junction temperature	T_J	°C		-55 to +150
Storage temperature	T_{STG}	°C		-55 to +150

■ Electrical Characteristics ($T_a = 25^\circ C$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	BC856	-80		
			BC857	-50		
			BC858	-30		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	BC856	-65		
			BC857	-45		
			BC858	-30		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E = -1\mu A, I_C = 0$	-5		
Collector cut-off current	I_{CBO}	nA	$V_{CB} = -30V, I_E = 0$			-15
Emitter-base cutoff current	I_{EBO}	uA	$V_{EB} = -5V, I_C = 0$			-0.1
Emitter cutoff current	I_{CEO}	mA	$V_{CE} = -30V, I_B = 0$			-1
DC current gain	h_{FE}		BC856A, 857A, 858A	110		220
			BC856B, 857B, 858B	200		450
			BC857C, BC858C	420		800
Collector-emitter saturation voltage	$V_{CE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$			-0.3
	$V_{CE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$			-0.65
Base-emitter saturation voltage	$V_{BE(sat)1}$	V	$I_C = -10mA, I_B = -0.5mA$		-0.7	
	$V_{BE(sat)2}$	V	$I_C = -100mA, I_B = -5mA$		-0.85	
Base-emitter on voltage	$V_{BE(ont)1}$	V	$V_{CE} = -5V, I_C = -2mA$		-0.65	-0.75
	$V_{BE(ont)2}$	V	$V_{CE} = -5V, I_C = -10mA$			-0.82
Transition frequency	f_T	MHz	$V_{CE} = -5V, I_C = -10mA, f = 100MHz$	100		
Collector-base output capacitance	C_{ob}	pF	$V_{CB} = -10V, f = 1MHz$			4.5

BC856AM3 THRU BC858CM3

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta JA}^{(1)}$	$^{\circ}\text{C/W}$	1250
Thermal resistance, junction-to-case	$R_{\theta JC}^{(1)}$	$^{\circ}\text{C/W}$	1000

Note:

(1) Thermal resistance from junction to ambient and from junction to case mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

■ Characteristics

Fig 1: Static Characteristics

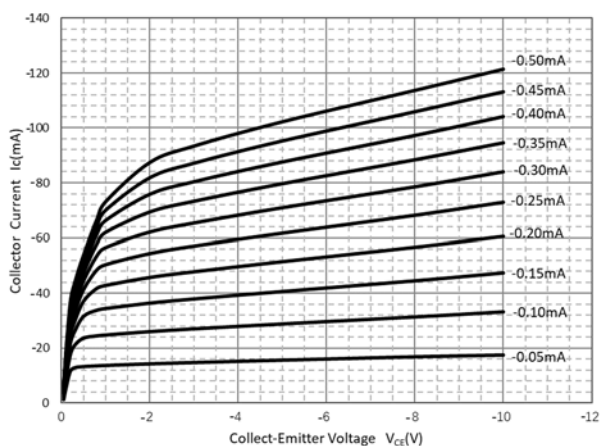


Fig 2: DC Current Gain Characteristics

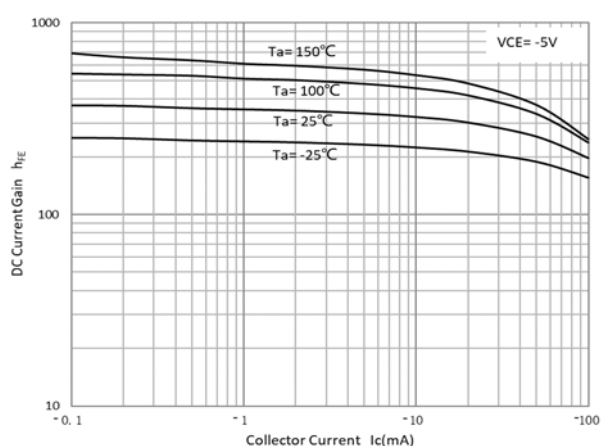


Fig 3: Collector-Emitter Saturation Voltage


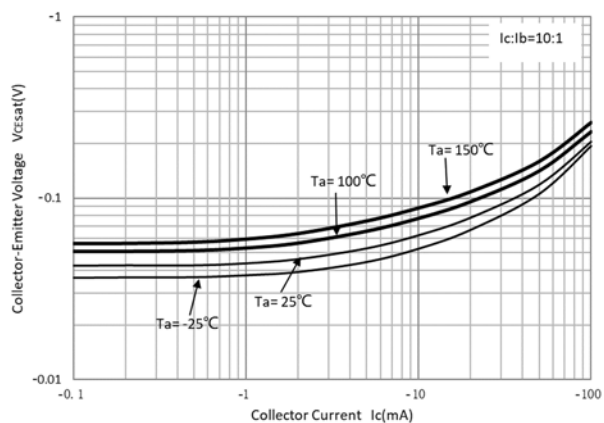


Fig 4: Base-Emitter Saturation Voltage

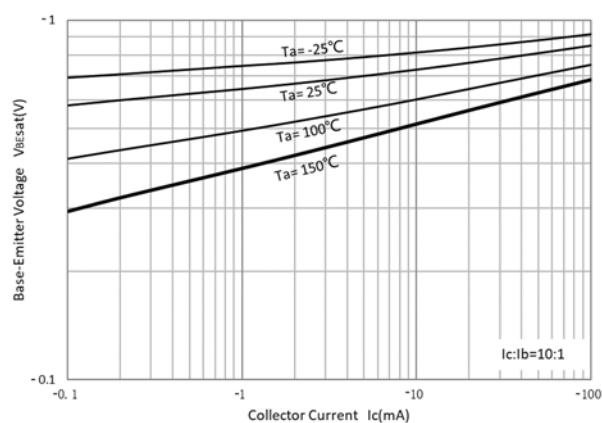

BC856AM3 THRU BC858CM3

Fig 5: Base-Emitter on Voltage

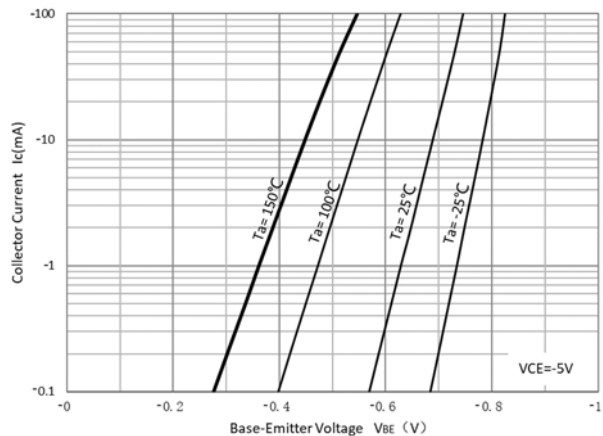


Fig 6: $C_{ob}/C_{ib}-V_{CB}/V_{EB}$


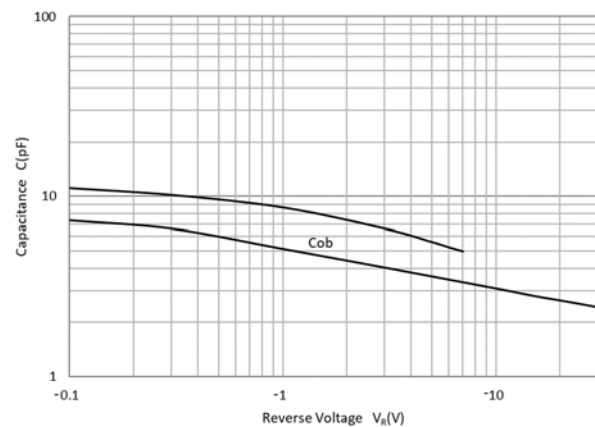


Fig 7: P_D - T_a Curve

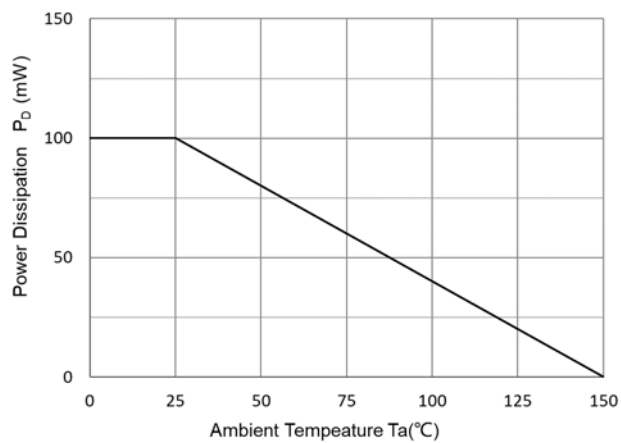


BC856AM3 THRU BC858CM3

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC856AM3 THRU BC858CM3	F2	Approximate 0.0013	8000	80000	320000	7" reel

■ Outline Dimensions

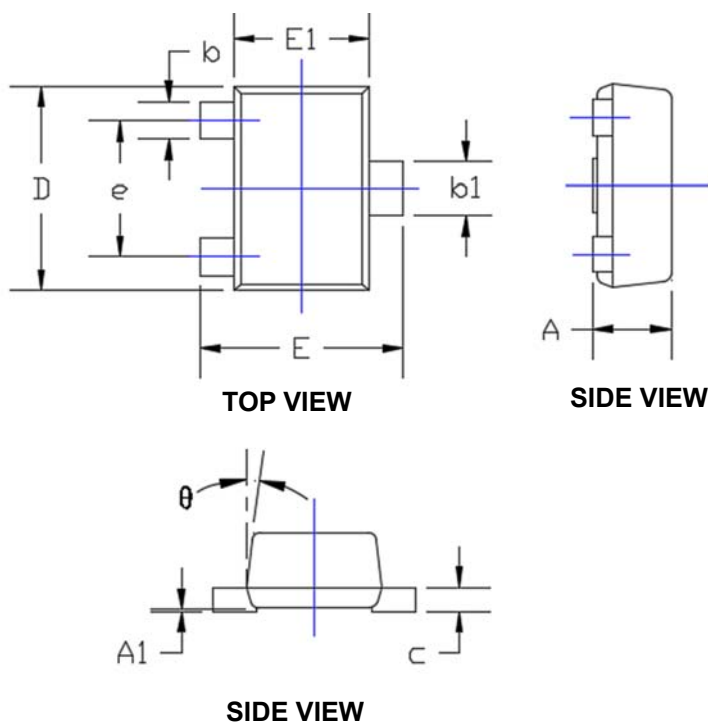

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.017	0.022	0.430	0.550
A1	0.000	0.002	0.000	0.050
b	0.007	0.011	0.170	0.270
b1	0.011	0.015	0.270	0.370
c	0.003	0.008	0.080	0.200
D	0.045	0.049	1.150	1.250
E	0.045	0.049	1.150	1.250
E1	0.030	0.033	0.750	0.850
e	0.031TYP.		0.800TYP.	
θ	7°REF.		7°REF.	

■ Suggested Pad Layout

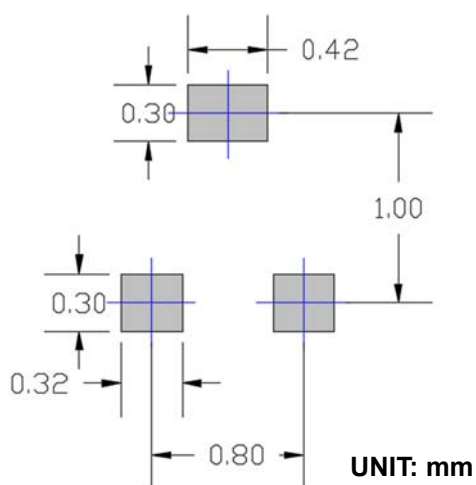

BC856AM3 THRU BC858CM3

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.