


BC857BV

Dual PNP Small Signal Transistor

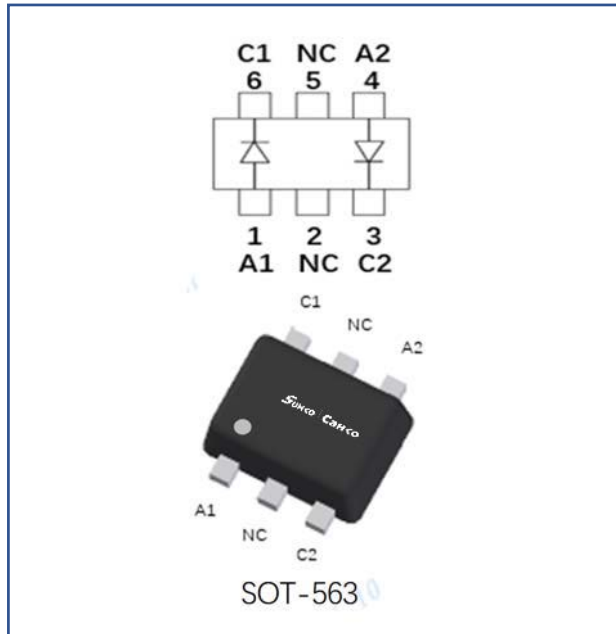

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				K5V
Collector-base voltage	V_{CBO}	V	$I_C=-10\mu\text{A}, I_E=0$	-50
Collector-emitter voltage	V_{CEO}	V	$I_C=-10\text{mA}, I_B=0$	-45
Emitter-base voltage	V_{EBO}	V	$I_E=-1\mu\text{A}, I_C=0$	-5
Collector current	I_C	mA		-100
Power dissipation	P_D	mW		150
Junction temperature	T_J	$^{\circ}\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150

BC857BV

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V _{(BR)CBO}	V	I _C =-10uA, I _E =0	-50		
Collector-emitter breakdown voltage	V _{(BR)CEO}	V	I _C =-10mA, I _B =0	-45		
Emitter-base breakdown voltage	V _{(BR)EBO}	V	I _E =-1uA, I _C =0	-5		
Collector cut-off current	I _{CBO}	nA	V _{CB} =-30V, I _B =0			-15
Emitter-base cutoff current	I _{EBO}	nA	V _{EB} =-5V, I _C =0			-100
DC current gain	h _{FE}		V _{CE} =-5V, I _C =-2mA	220		475
Collector-emitter saturation voltage	V _{CE(sat)1}	V	I _C =-10mA, I _B =-0.5mA			-0.1
	V _{CE(sat)2}	V	I _C =-100mA, I _B =-5mA			-0.4
Base-emitter saturation voltage	V _{BE(sat)1}	V	I _C =-10mA, I _B =-0.5mA		-0.7	
	V _{BE(sat)2}	V	I _C =-100mA, I _B =-5mA		-0.9	
Base-emitter voltage	V _{BE1}	V	V _{CE} =-5V, I _C =-2mA	-0.6		-0.75
	V _{BE2}	V	V _{CE} =-5V, I _C =-10mA			-0.82
Transition frequency	f _T	MHz	V _{CE} =-5V, I _C =-10mA, f=100MHz		200	

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} ⁽¹⁾	°C/W	833
Thermal resistance, junction-to-case	R _{θJ-C} ⁽¹⁾	°C/W	667

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

BC857BV

Characteristics

Fig 1: Static Characteristics

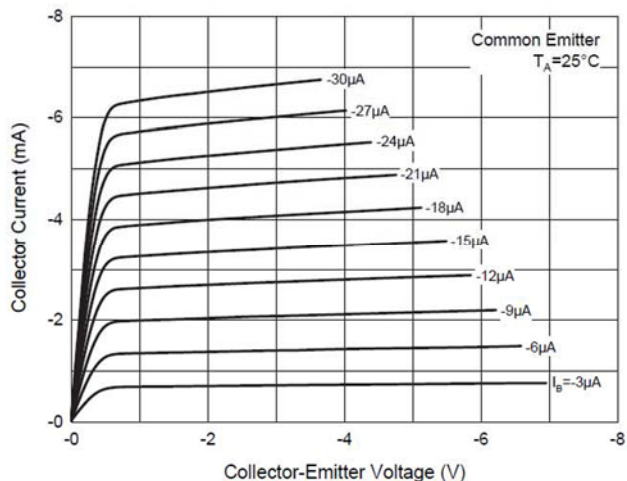


Fig 2: DC Current Gain Characteristics

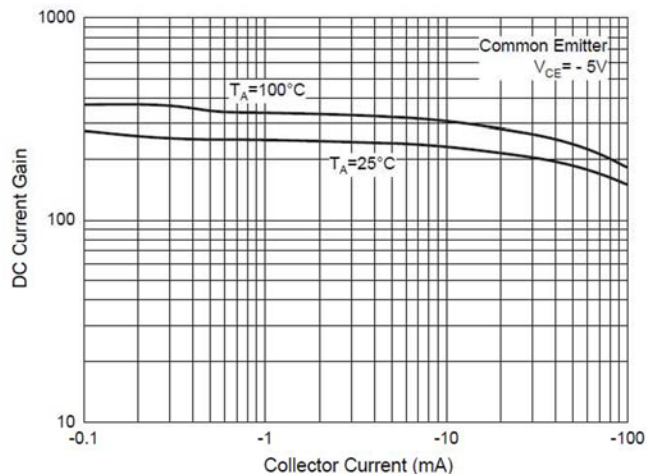


Fig 3: Collector-Emitter Saturation Voltage

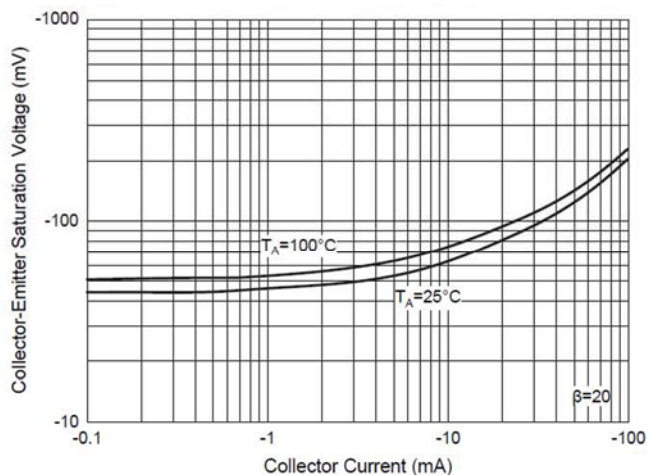


Fig 4: Base-Emitter Saturation Voltage

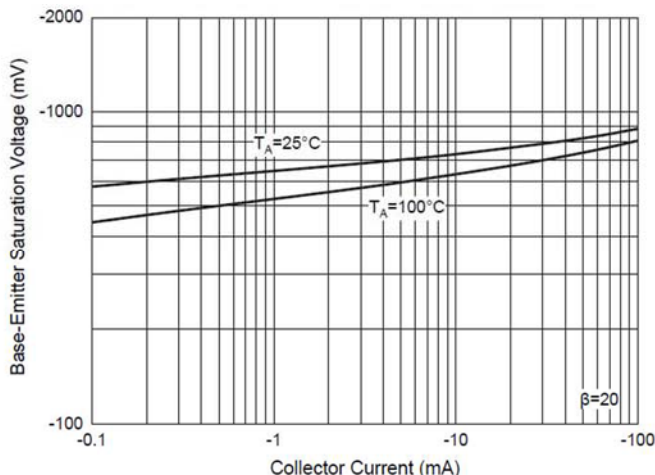


Fig 5: Base-Emitter on Voltage


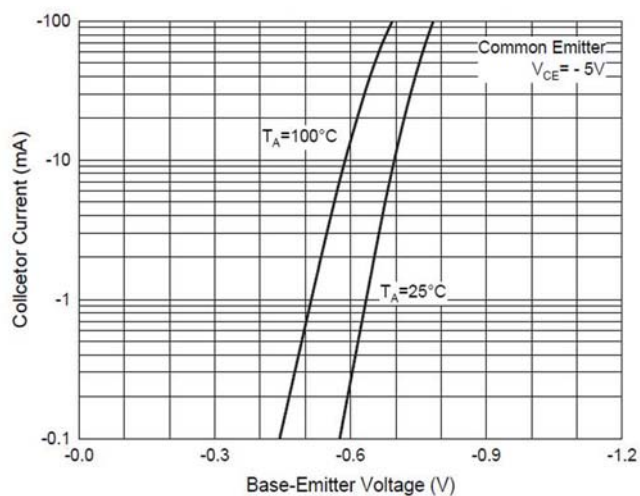


Fig 6: P_D-Ta Curve

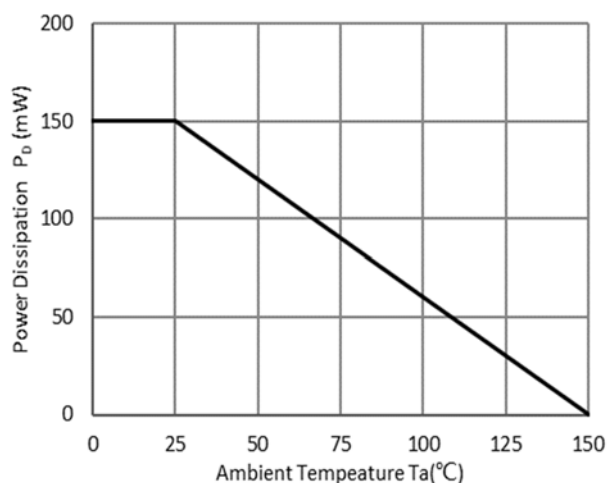


BC857BV

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BC857BV	F2	Approximate 0.0035	3000	30000	120000	7" reel

■ Outline Dimensions

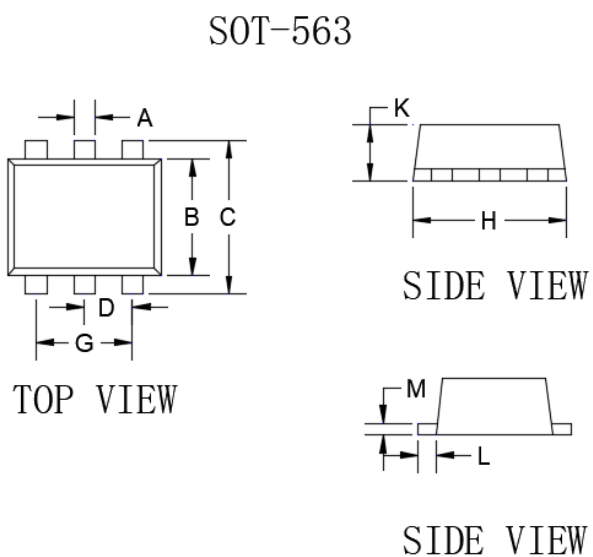

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MM	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

■ Suggested Pad Layout

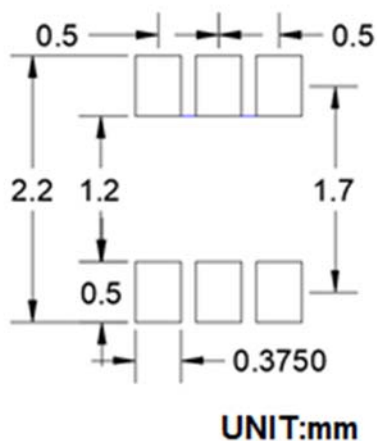

BC857BV

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.