


1-Line, Uni-directional, Transient Voltage Suppressor



DFN0603-2L

Features

- Stand-off voltage: 2.1V Max
- Transient protection for each line according to
IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
IEC61000-4-4 (EFT): 40A (5/50ns)
IEC61000-4-5(surge): 22A (8/20 μs)
- Low leakage current
- Low clamping voltage
- Low clamping voltage:
 $V_{CL} = 4.5\text{V typ. @ IPP} = 16\text{A (TLP)}$
- Compliant


Applications

- Power supply protection
- Power management

Mechanical Data

- Package: DFN0603-2L
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 3 per J-STD-020
- Marking Information: See Below

Pin1



Pin2

■Definitions of electrical characteristics

V_F Forward voltage

I_F Forward current

V_{FC} Forward clamping voltage

I_{PP} Peak pulse current


V_{RWM} Reverse stand-off voltage

I_R Reverse leakage current

V_{BR} Reverse breakdown voltage

V_{CL} Clamping voltage

I_{PP} Peak pulse current

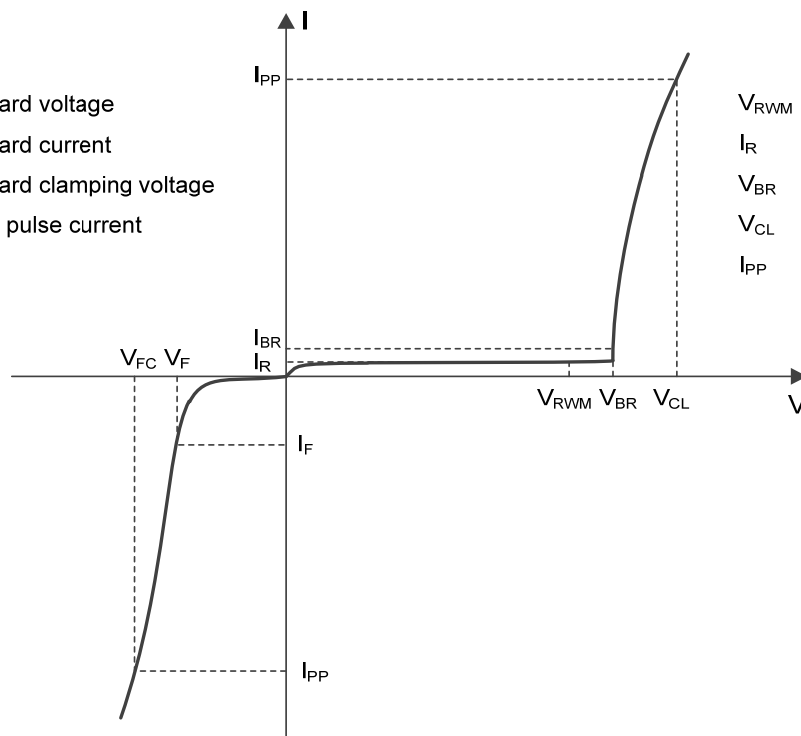

■Maximum Ratings

PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	180	W
Peak pulse current ($t_p = 8/20\mu s$)	I_{PP}	22	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	kV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	$^{\circ}C$
Operating temperature	T_{OP}	-40~85	$^{\circ}C$
Storage temperature	T_{STG}	-55~150	$^{\circ}C$

■Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	V_{RWM}	V				2.1
Reverse leakage current	I_R	nA	$V_{RWM} = 2.1V$			100
Reverse breakdown voltage	V_{BR}	V	$I_{BR} = 1mA$	4.0		
Forward voltage	V_F	V	$I_F = 20mA$	0.45		1.25
Clamping voltage ¹⁾	V_{CL}	V	$I_{PP} = 16A, t_p = 100ns$		4.5	
Dynamic resistance ¹⁾	R_{DYN}	Ω			0.1	
Clamping voltage ²⁾	V_{CL}	V	$V_{ESD} = 8kV$		5.0	
Clamping voltage ³⁾	V_{CL}	V	$I_{PP} = 1A, t_p = 8/20\mu s$		4.5	
		V	$I_{PP} = 13A, t_p = 8/20\mu s$		5.5	
		V	$I_{PP} = 22A, t_p = 8/20\mu s$		6.6	
Junction capacitance	C_J	pF	$V_R = 0V, f = 1MHz$		50	65

Notes:

- (1). TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 2ns$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.
- (2). Contact discharge mode, according to IEC61000-4-2.
- (3). Non-repetitive current pulse, according to IEC61000-4-5.

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD2V1LZA	F1	Approximate 0.18	10000	40000	400000	7" reel

■ Characteristics (Typical)

Fig.1 8/20 μ s waveform per IEC61000-4-5

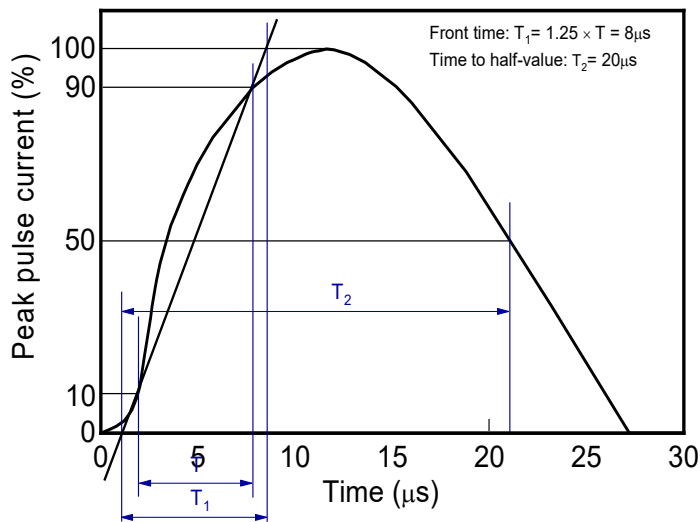


Fig.2 Contact discharge current waveform per IEC61000-4-2

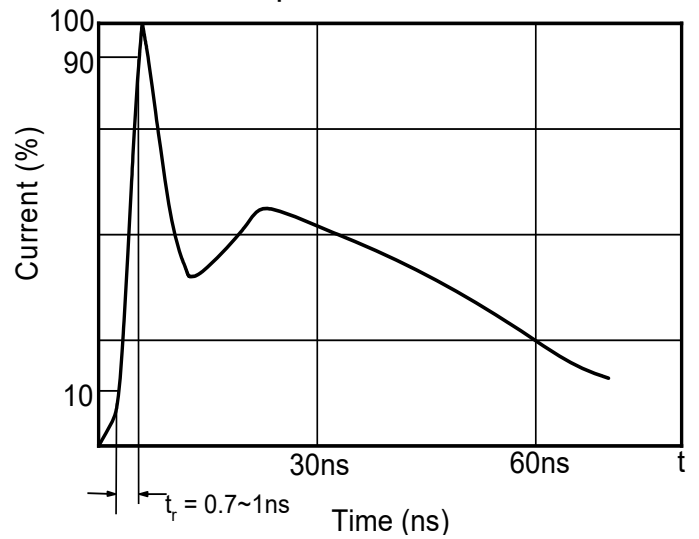


Fig.3 Clamping voltage vs. Peak pulse current

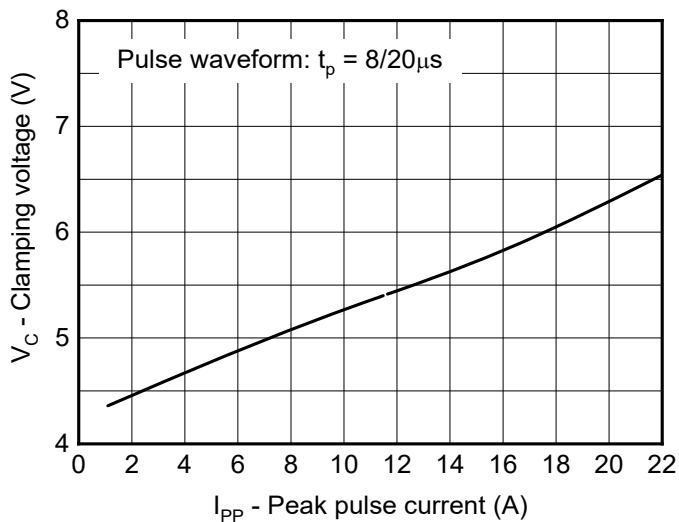


Fig.4 Capacitance vs. Reverse voltage

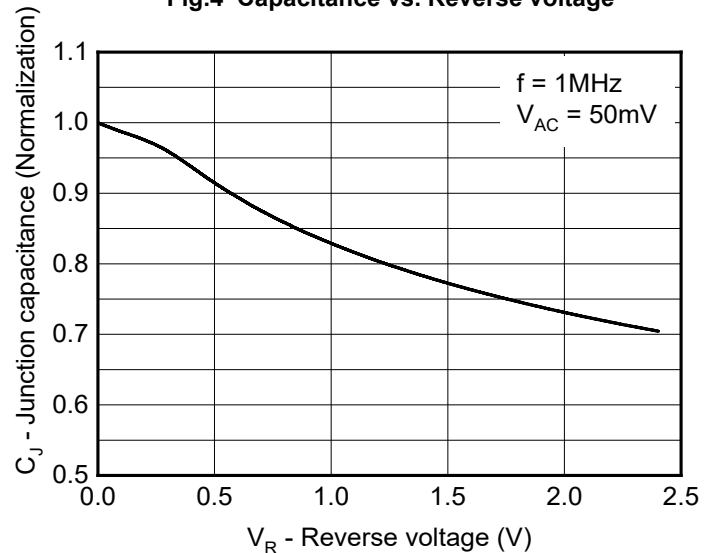


Fig.5 Non-repetitive peak pulse power vs. Pulse time



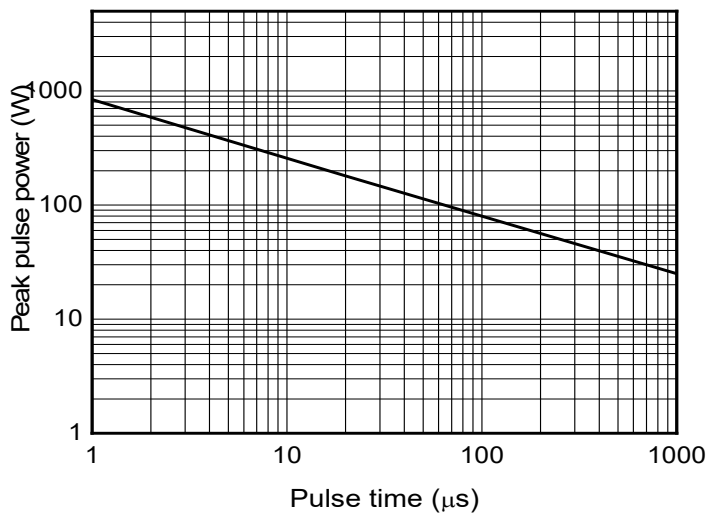


Fig.6 Power derating vs. Ambient temperature

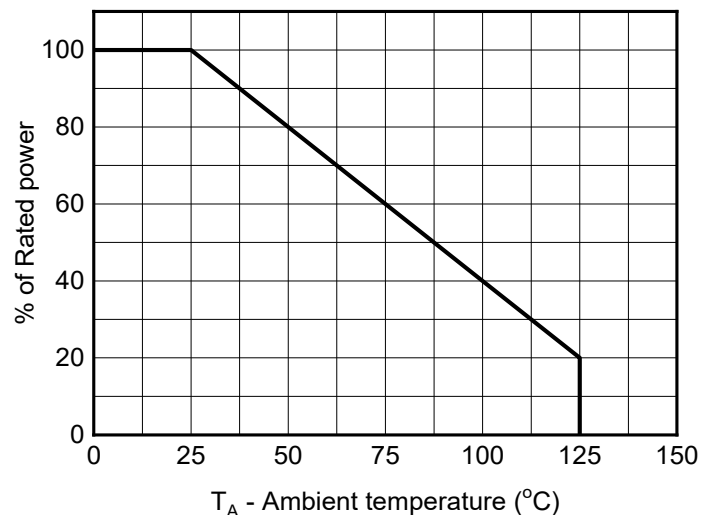


■ Outline Dimensions

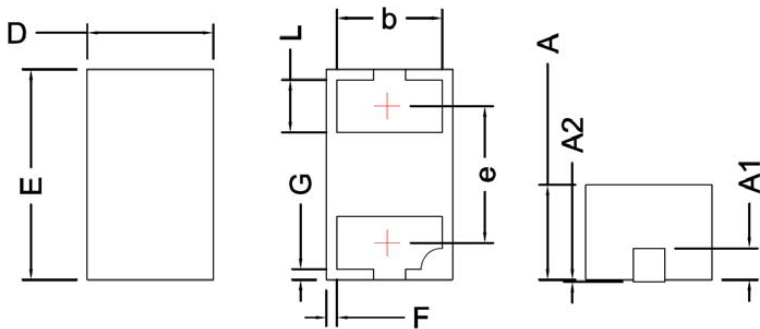

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	0.25	0.30	0.35
E	0.55	0.60	0.67
A	0.23	0.30	0.35
A1	0.102 BSC		
A2			0.05
F	0.005		
G	0.005		
L	0.10	0.17	0.21
b	0.20	0.24	0.23
e	0.36 BSC		

■ Recommended PCB Layout



Unit:mm

Notes:
This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.