



Glass Passivated Rectifier Diode Modules

VRRM 800 to 1800V
IFAV 120 A


Applications

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Features

- Blocking voltage: 800 to 1800V
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- Glass passivated chip
- UL recognized applied for file no. E360040

Circuit

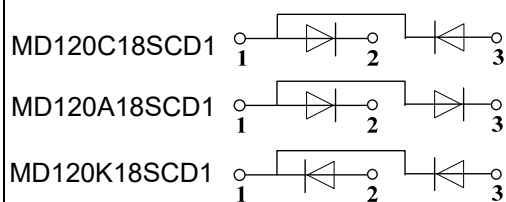

Module Type

TYPE			VRRM	VRSM
MD120C08SCD1	MD120A08SCD1	MD120K08SCD1	800V	900V
MD120C12SCD1	MD120A12SCD1	MD120K12SCD1	1200V	1300V
MD120C16SCD1	MD120A16SCD1	MD120K16SCD1	1600V	1700V
MD120C18SCD1	MD120A18SCD1	MD120K18SCD1	1800V	1900V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=106°C	120	A
IFSM	t=10mS Tvj =45°C	3000	A
i ² t	t=10mS Tvj =45°C	42200	A ² s
V _{isol}	a.c.50HZ;r.m.s.;1min	3000	V
Tvj		-40 to +150	°C
T _{stg}		-40 to +125	°C
Mt	To terminals(M5)	3 ± 15%	Nm
Ms	To heatsink(M6)	5 ± 15%	Nm
Weight	Module (Approximately)	100	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per diode	0.25	°C/W
R _{th(j-c)}	Per Module	0.12	°C/W
R _{th(c-s)}	Per diode	0.2	°C/W
R _{th(c-s)}	Per Module	0.1	°C/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
V_{FM}	$T=25^{\circ}C$ $I_F=300A$	—	1.10	1.25	V
V_{FO}	$T_J=25^{\circ}C$	—	0.87	—	V
	$T_J=150^{\circ}C$	—	0.69	—	V
r_F	$T_J=25^{\circ}C$	—	1.1	—	m Ω
	$T_J=150^{\circ}C$	—	1.55	—	m Ω
I_{RD}	$T_{vj}=150^{\circ}C$ $V_{RD}=V_{RRM}$	—	—	6	mA

Performance Curves

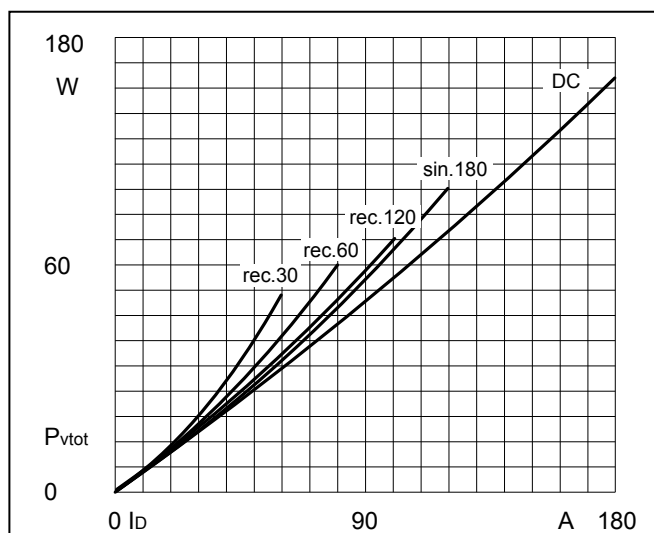


Fig1. Power dissipation

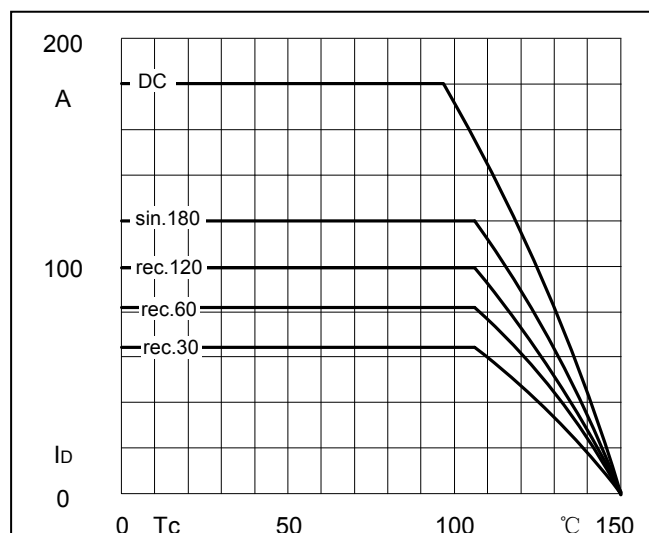


Fig2. Forward Current Derating Curve

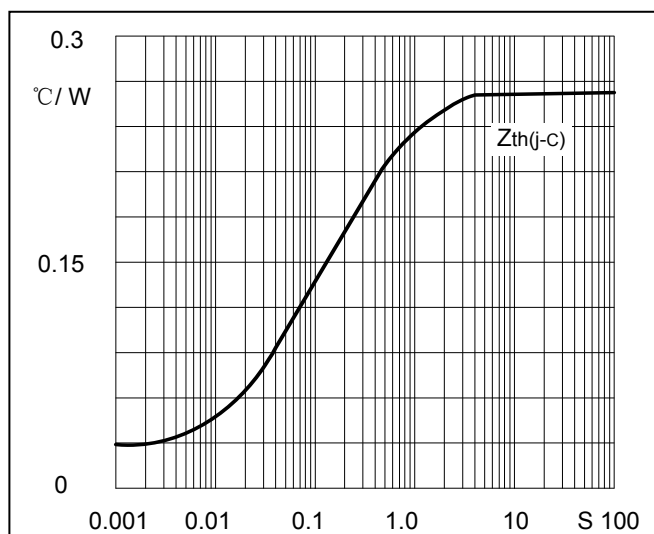


Fig3. Transient thermal impedance

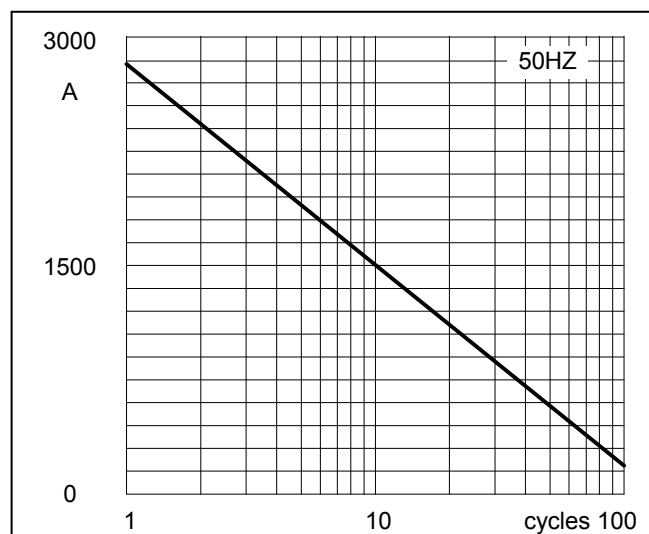


Fig4. Max Non-Repetitive Forward Surge Current


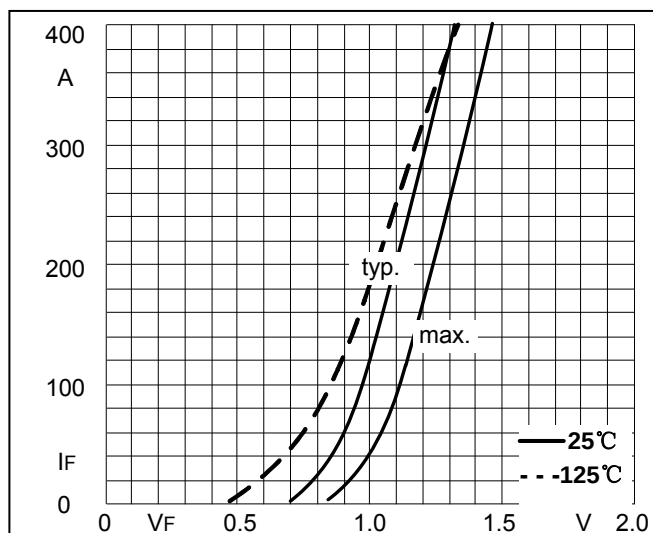


Fig5. Forward Characteristics

Package Outline Information

CASE: D1

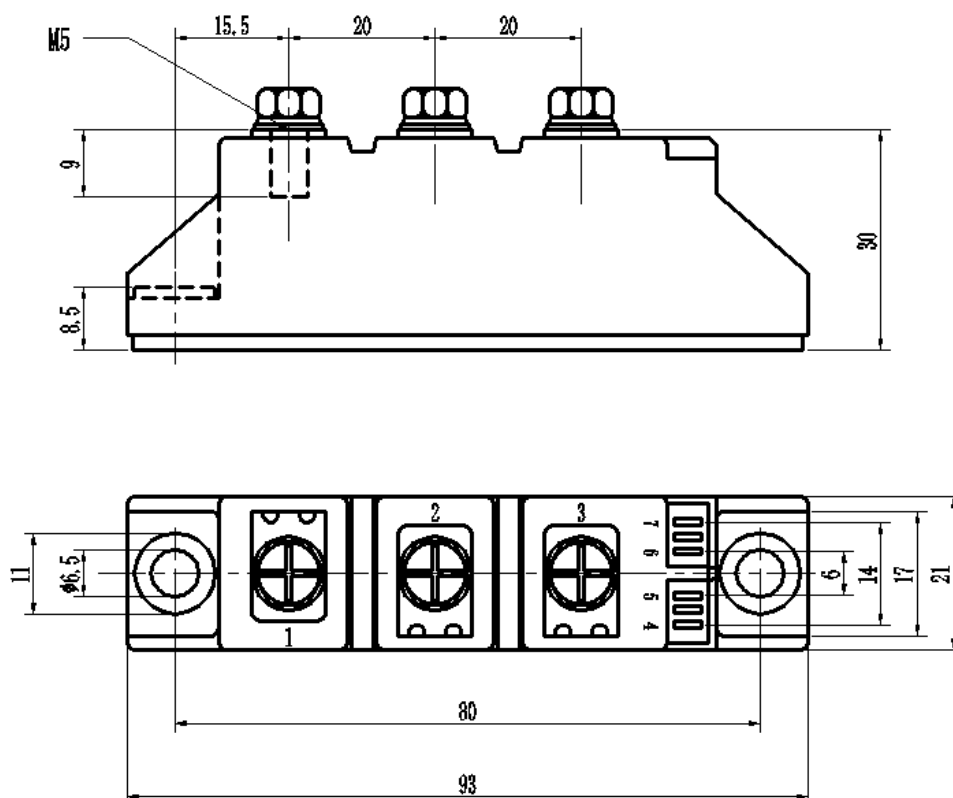

Dimensions in mm