



NPN Small Signal Transistor

**SOT-23**

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

BC846/BC847/BC848

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions		Value
Device marking code			BC846A		1A
			BC846B		1B
			BC847A		1E
			BC847B		1F
			BC847C		1G
			BC848A		1J
			BC848B		1K
			BC848C		1L
Collector-base voltage	V _{CBO}	V	BC846	I _C = 10μA, I _E =0	80
			BC847		50
			BC848		30
Collector-emitter voltage	V _{CEO}	V	BC846	I _C =10mA, I _B =0	65
			BC847		45
			BC848		30
Emitter-base voltage	V _{EBO}	V	I _E = 10μA, I _C =0		6
Collector current	I _C	A			0.1
Power dissipation	P _D	mW			200
Junction temperature	T _J	°C			-55 to +150
Storage temperature	T _{STG}	°C			-55 to +150

BC846/BC847/BC848

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions		Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	BC846	$I_C=10\mu A, I_E=0$	80		
			BC847		50		
			BC848		30		
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	V	BC846	$I_C=10mA, I_B=0$	65		
			BC847		45		
			BC848		30		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	$I_E=10\mu A, I_C=0$		6		
Collector-base cut-off current	I_{CBO}	uA	BC846	$V_{CB}=70\text{ V}$			0.1
			BC847	$V_{CB}=50\text{ V}$			0.1
			BC848	$V_{CB}=30\text{ V}$			0.1
Collector-emitter cut-off current	I_{CEO}	uA	BC846	$V_{CE}=60\text{ V}$			0.1
			BC847	$V_{CE}=45\text{ V}$			0.1
			BC848	$V_{CE}=30\text{ V}$			0.1
Emitter-base cut-off current	I_{EBO}	uA	$V_{EB}=5V$				0.1
DC current gain	h_{FE}		BC846A,847A,848A	$V_{CE}=5V, I_C=2mA$	110		220
			BC846B,847B,848B		200		450
			BC847C,BC848C		420		800
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C=100mA, I_B=5mA$				0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C=100mA, I_B=5mA$				1.1
Transition frequency	fT	MHz	$V_{CE}=5V, I_C=10mA$ f=100MHz		100		
Collector-base output capacitance	Cob	pF	$V_{CB}=10V, f=1MHz$				4.5

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	R _{θJ-A} ⁽¹⁾	°C/W	625
Thermal resistance, junction-to-case	R _{θJ-C} ⁽¹⁾	°C/W	500

Note:

(1) Device mounted on PCB, single-sided copper, with standard footprint

■ Characteristics

Fig 1: Static Characteristics

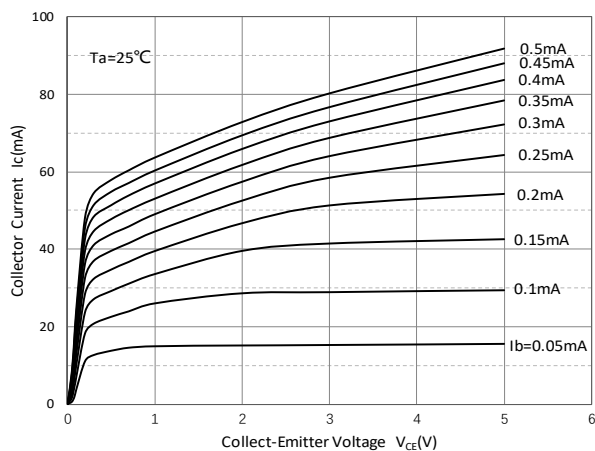


Fig 2: DC Current Gain

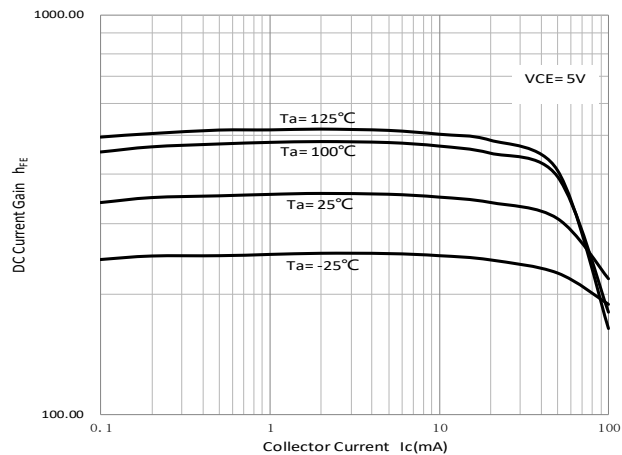


Fig 3: Collector-Emitter Saturation Voltage

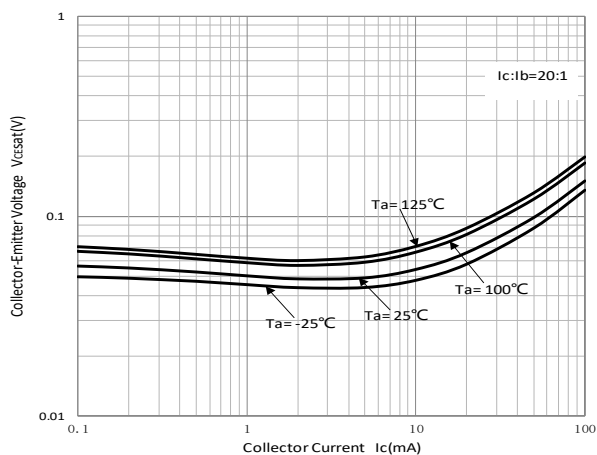


Fig 4: Base-Emitter Saturation Voltage

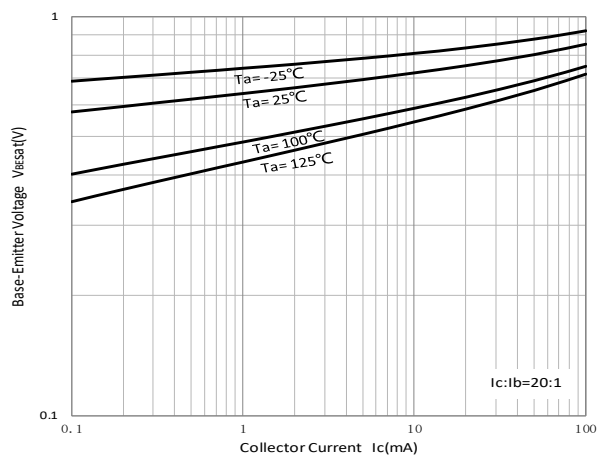


Fig 5: Base-Emitter On Voltage

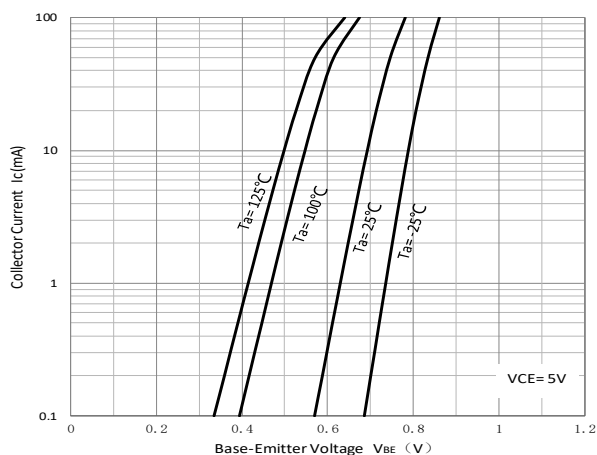


Fig 6: Cob/Cib-Vcb/Veb


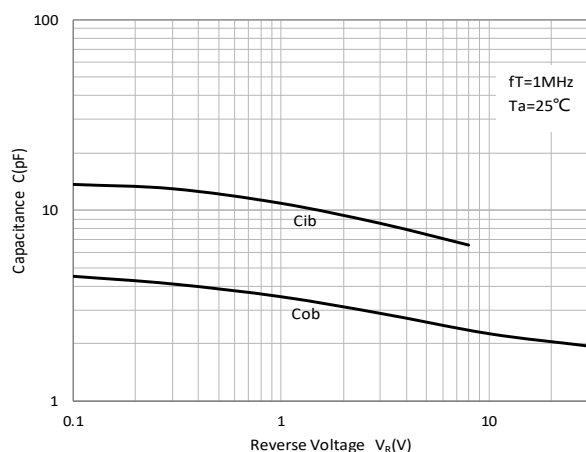


Fig 7: PD-Ta Curve

BC846/BC847/BC848

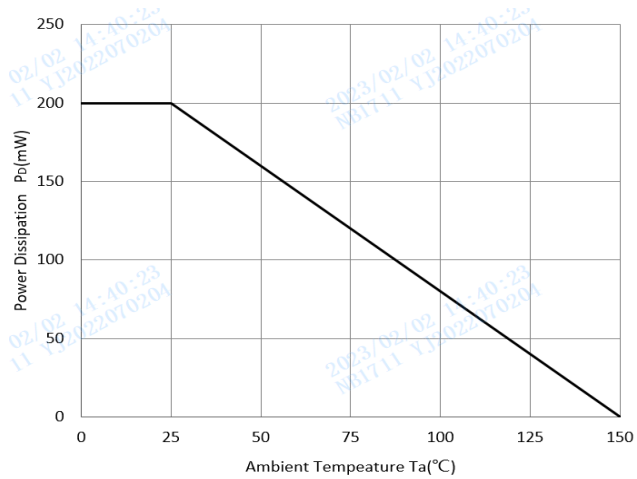


■ Ordering Information

BC846/BC847/BC848


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity (pcs)	Delivery mode
BC846/BC847/BC848	F2	Approximate 0.008	3000	30000	120000	7" reel
BC846/BC847/BC848	F4	Approximate 0.008	10000	/	210000	

■ Outline Dimensions

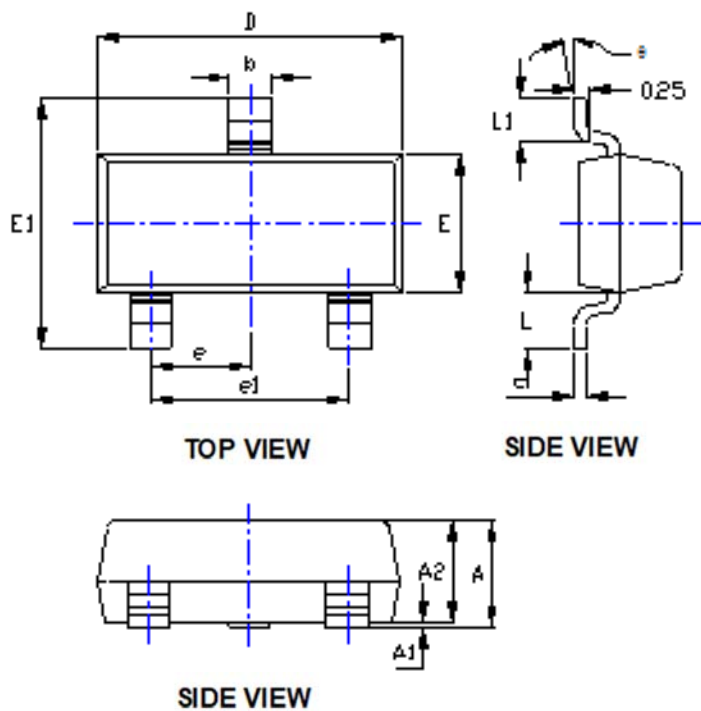

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■ Suggested Pad Layout

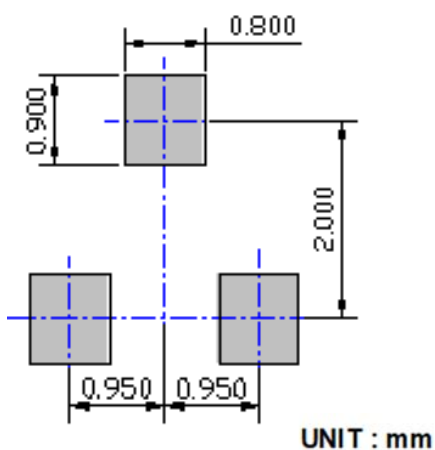

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.