

MF100K06F5

FRED Modules

V_{RRM} 600V
I_{FAV} 100 A h 2


Applications

- y Inversion Welder
- y Uninterruptible Power Supply (UPS)
- y Plating Power Supply
- y Ultrasonic Cleaner and Welder
- y Power Factor Correction (PFC) Circuit
- y Converter & Chopper

Features

- y Soft Reverse Recovery Characteristics
- y Ultrafast Reverse Recovery Time
- y Low Reverse Recovery Loss
- y Low Forward Voltage
- y High Surge Current Capability
- y Low Inductance Package
- y Insulation Encapsulation

Circuit

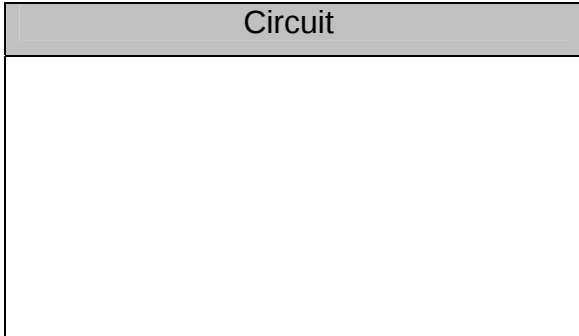

Maximum Ratings

Symbol	Conditions	Values	Units
V _R		600	V
V _{RRM}		600	V
I _{F(AV)}	T _C =100°C, Per Diode	100	A
	T _C =100°C, Per Module	200	A
I _{F(RMS)}	T _C =100°C, Per Diode	150	A
I _{FSM}	1/2 Cycle , 50Hz, Sine	1300	A
	1/2 Cycle , 60Hz, Sine	1426	A
I ² t	T _J =45°C, t=10ms, 50Hz, Sine	8450	A ² s
	T _J =45°C, t=8.3ms, 60Hz, Sine		A ² s
P _D		280	W
Visol	AC, Ton=1min	3000	V
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Torque	RecommendedHM5H	3±15%	N·m
Torque	RecommendedHM6H	4.5±15%	N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Junction-to-Case, Per Diode	0.32	/W
R _{th(j-c)}	Junction-to-Case, Per Module	0.16	/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=600V$	--	--	0.5	mA
	$V_R=600V, T_J=125^{\circ}C$	--	--	5	mA
V_F	$I_F=100A$	--	1.25	1.4	V
	$I_F=100A, T_J=125^{\circ}C$	--	1.1	1.3	V
t_{rr}	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	45	50	ns
t_{rr}	$V_R=300V, I_F=100A, di_F/dt=-200A/\mu s, T_J=25^{\circ}C$	--	105	--	ns
I_{RRM}		--	10	--	A
t_{rr}	$V_R=300V, I_F=100A, di_F/dt=-200A/\mu s, T_J=125^{\circ}C$	--	220	--	ns
I_{RRM}		--	18	--	A

Performance Curves

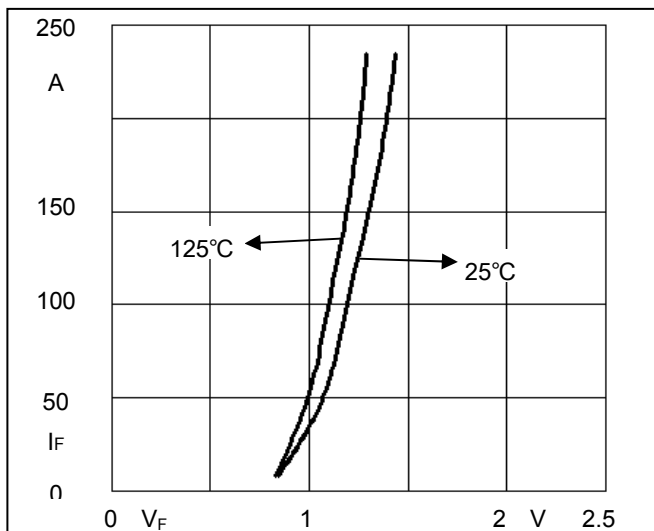


Fig1. Forward Voltage Drop vs Forward Current

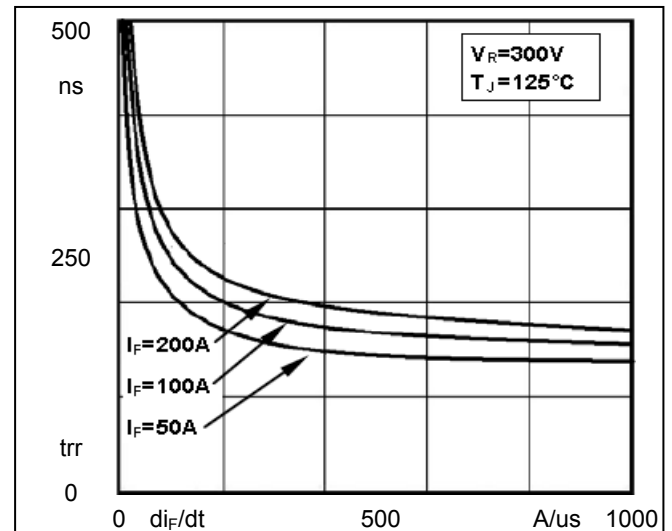


Fig2. Reverse Recovery Time vs di_F/dt

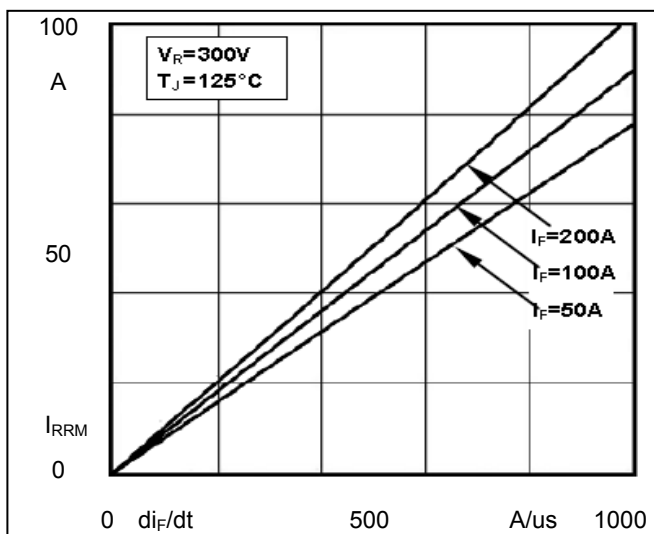


Fig3. Reverse Recovery Current vs di_F/dt


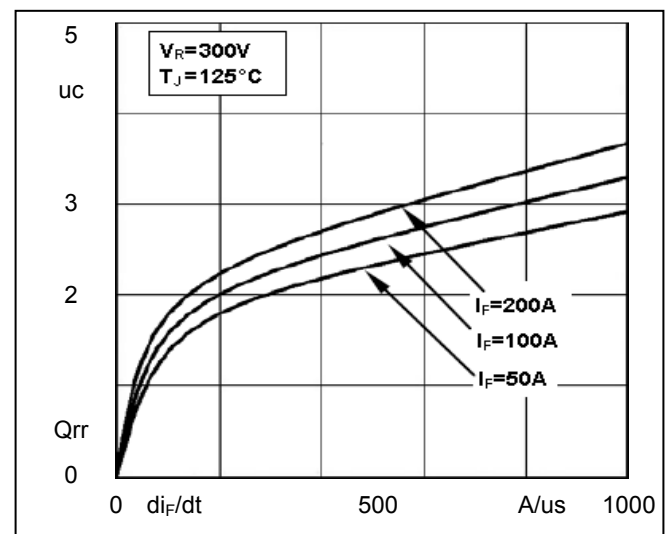


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F5

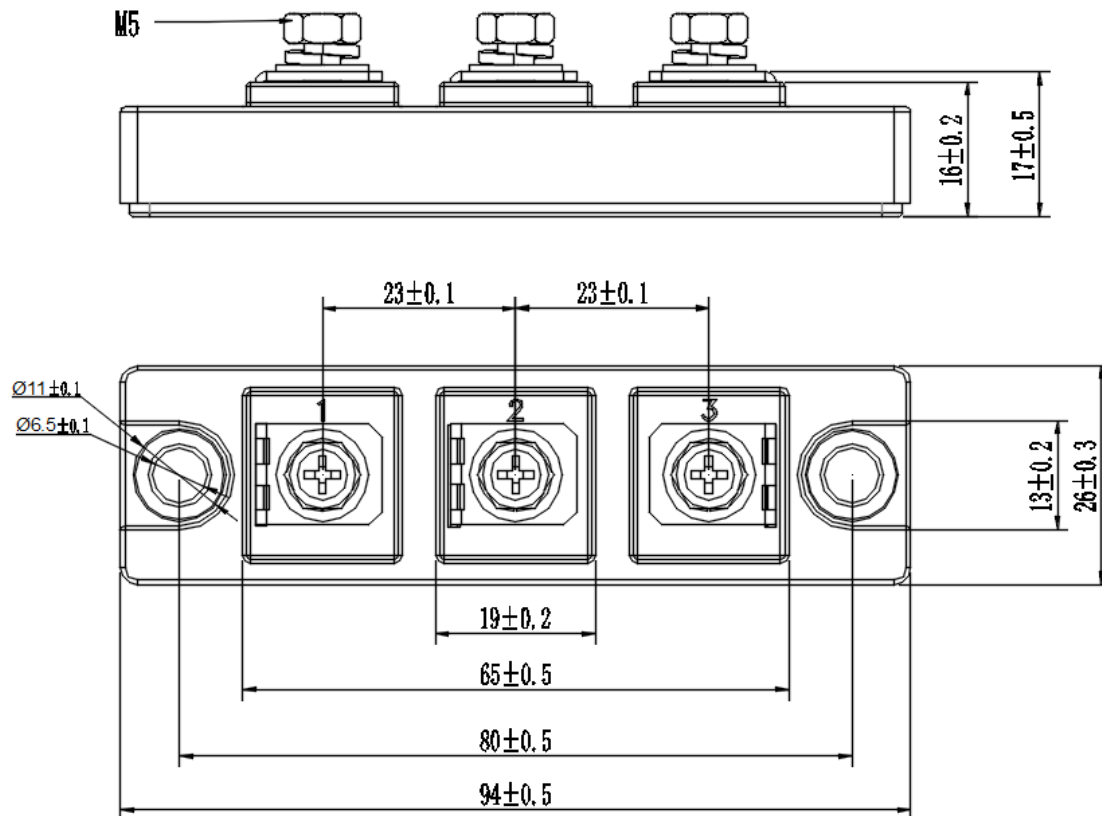

Dimensions in mm