


EMD22

NPN+PNP Digital Transistors (Built-in Resistors)

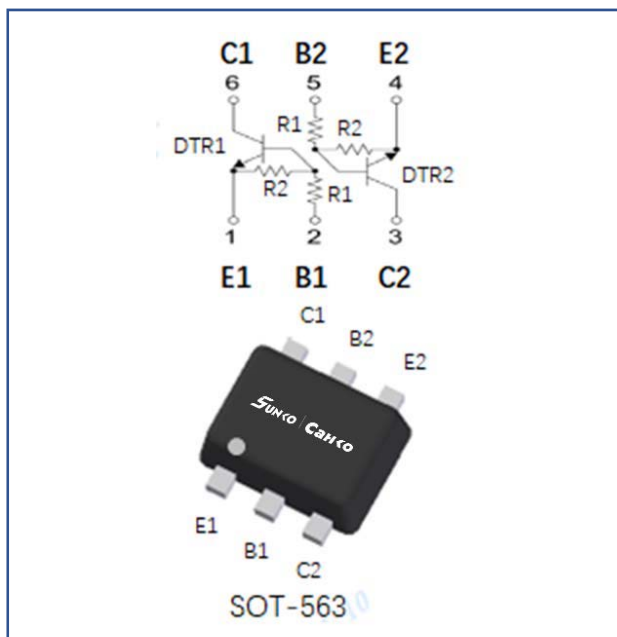

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

DTR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				D22
Supply voltage	V_{CC}	V		50
Input voltage	V_{IN}	V		-5 to +30
Output current	I_O	mA		100
Power dissipation	P_D	mW		150
Junction temperature	T_J	$^\circ\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^\circ\text{C}$		-55 to +150

EMD22

DTR2-PNP

Item	Symbol	Unit	Conditions	Value
Supply voltage	V_{CC}	V		-50
Input voltage	V_{IN}	V		-30 to +5
Output current	I_O	mA		-100
Power dissipation	P_D	mW		150
Junction temperature	T_J	°C		-55 to +150
Storage temperature	T_{STG}	°C		-55 to +150

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

DTR1-NPN

Item	Symbol	Unit	Conditions	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$V_{CC}=5V, I_c=100\mu A$	0.5		
	$V_{I(on)}$	V	$V_O=0.3V, I_c=5mA$			1.3
Output voltage	$V_{O(on)}$	V	$I_O / I_i = 5mA / 0.25 mA$			0.3
Input current	I_i	mA	$V_i=5V$			1.8
Output current	$I_{O(off)}$	uA	$V_{CC}=50V, V_i=0$			0.5
DC current gain	G_i		$V_O=5V, I_O = 10mA$	80		
Input resistance	R_1	kΩ		3.29	4.7	6.11
Resistance ratio	R_2/R_1			8	10	12
Transition frequency	f_T	MHz	$V_{CE}=10V, I_E=5mA, f=100MHz$		250	

EMD22

DTR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$V_{CC}=-5V, I_c=-100\mu A$	-0.5		
	$V_{I(on)}$	V	$V_O=-0.3V, I_c=-5mA$			-1.3
Output voltage	$V_{O(on)}$	V	$I_O / I_i = -5mA / -0.25 mA$			-0.3
Input current	I_i	mA	$V_i=-5V$			-1.8
Output current	$I_{O(off)}$	μA	$V_{CC}=-50V, V_i=0$			-0.5
DC current gain	G_i		$V_O=-5V, I_o = -10mA$	80		
Input resistance	R_1	k Ω		3.29	4.7	6.11
Resistance ratio	R_2/R_1			8	10	12
Transition frequency	f_T	MHz	$V_{CE}=-10V, I_E=-5mA, f=100MHz$		250	

■ Thermal Characteristics

PARAMETER	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}C/W$	833
Thermal resistance, junction-to-case	$R_{\theta J-C}^{(1)}$	$^{\circ}C/W$	667

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas

EMD22

■ Characteristics

DTR1-NPN

Fig 1: DC Current Gain Characteristics

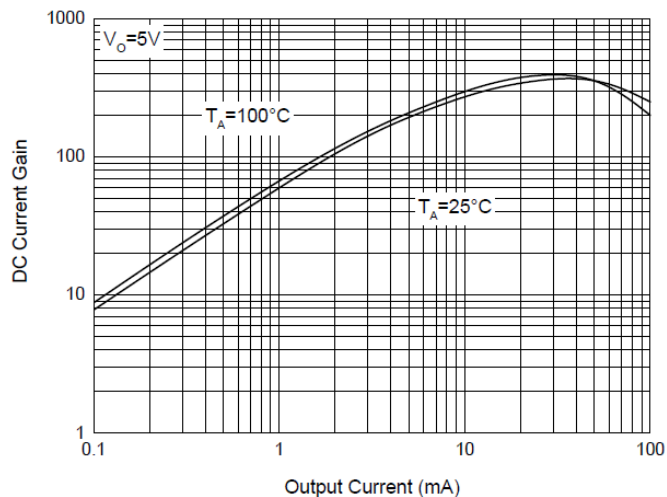


Fig 2: Input Voltage (On) Characteristics

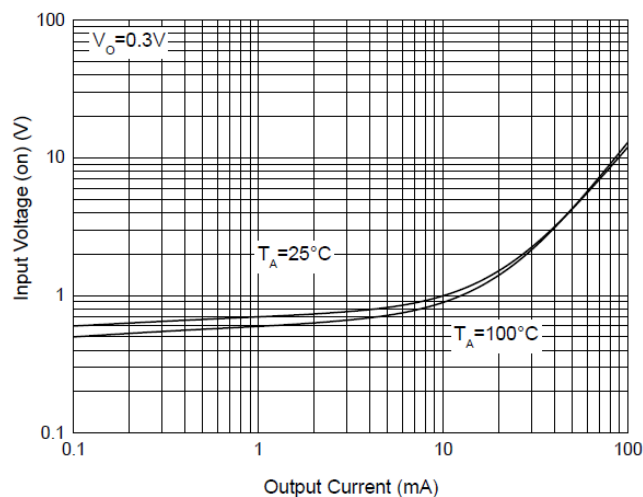


Fig 3: Input Voltage (Off) Characteristics

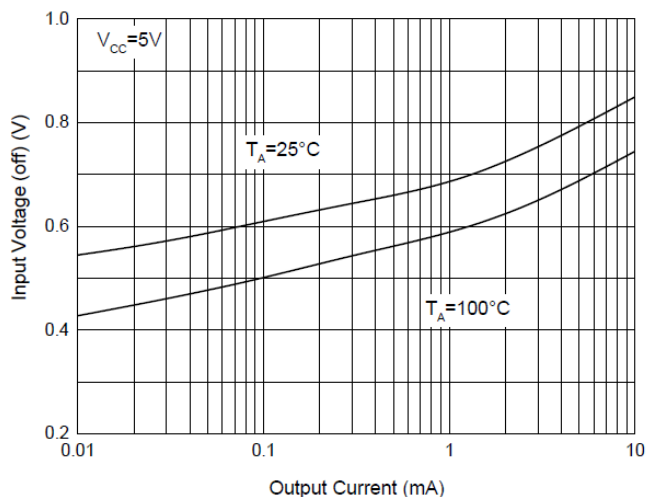


Fig 4: Output Voltage Characteristics


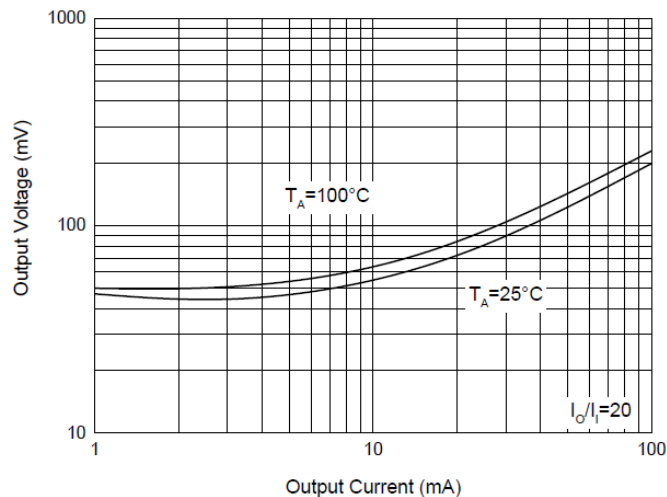


Fig 5: P_D - T_A Curve

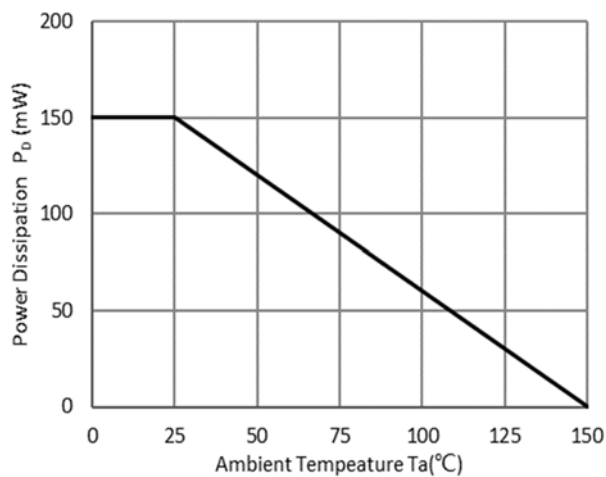

EMD22

DTR2-PNP

Fig 1: DC Current Gain Characteristics

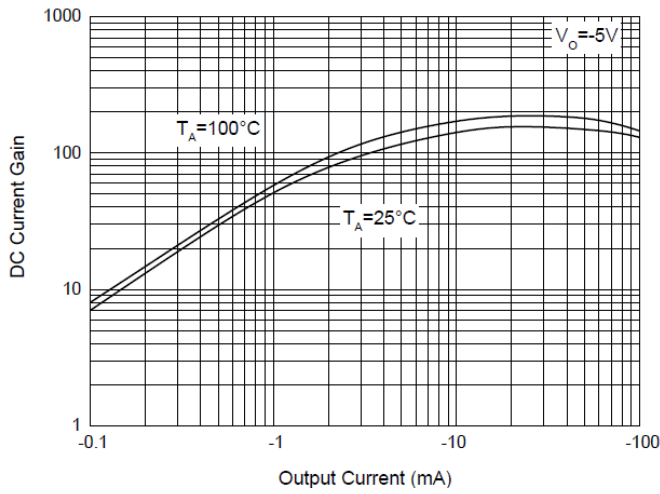


Fig 2: Input Voltage (On) Characteristics

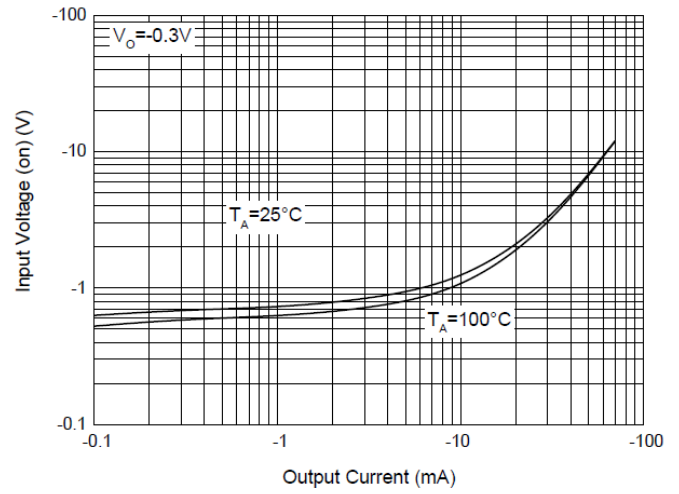


Fig 3: Input Voltage (Off) Characteristics

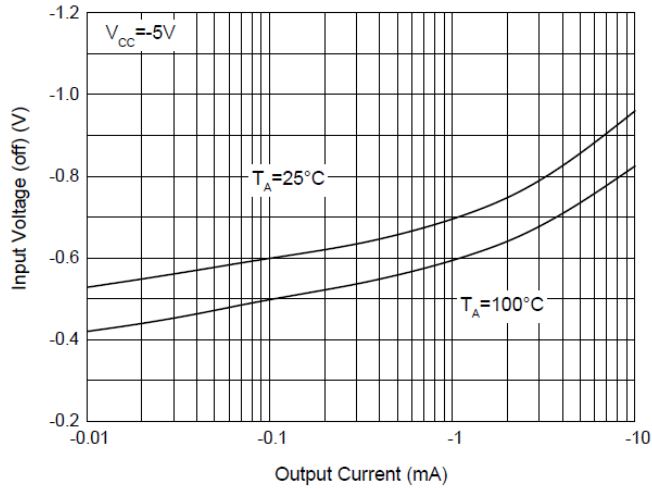


Fig 4: Output Voltage Characteristics


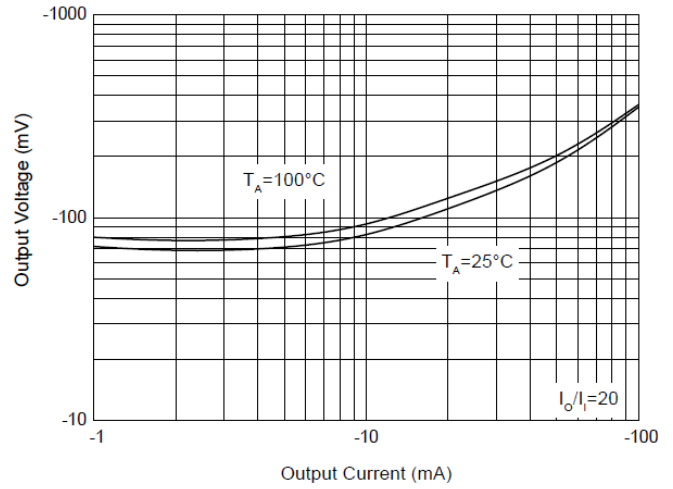


Fig 5: P_D-T_a Curve

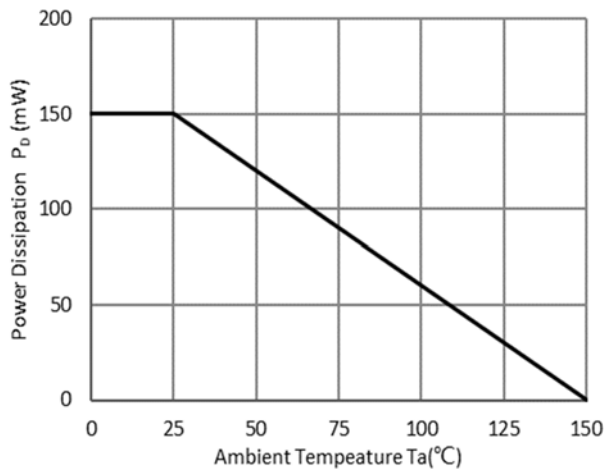


EMD22

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
EMD22	F2	Approximate 0.0035	3000	30000	120000	7" reel

■ Outline Dimensions

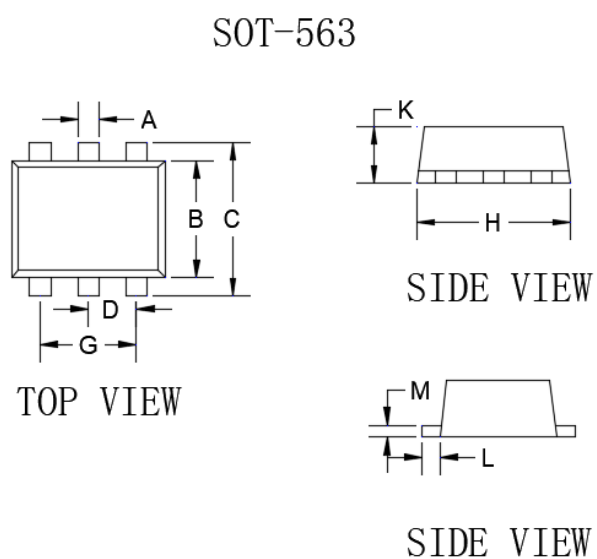

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

■ Suggested Pad Layout

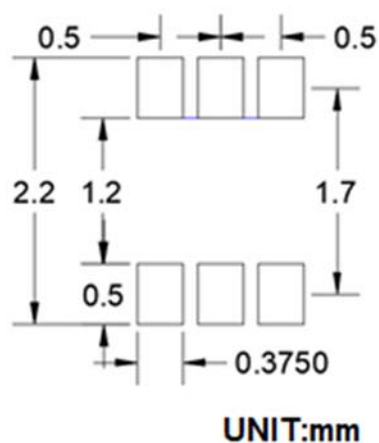

EMD22

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.