


NPN General Purpose Amplifier

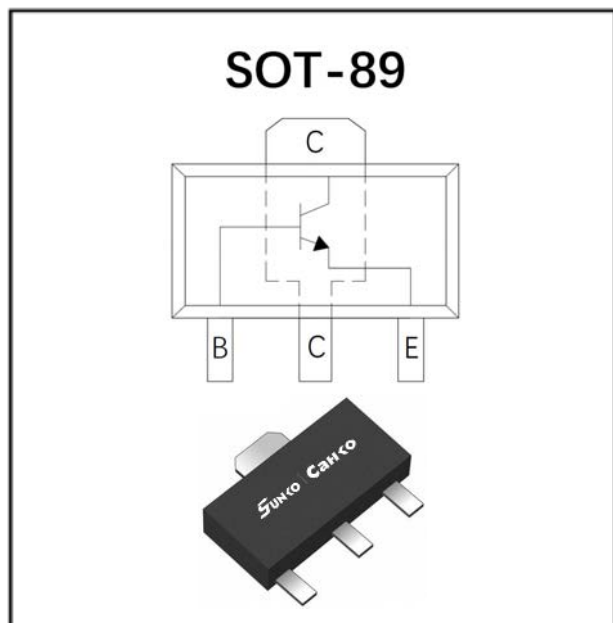

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- Low collector-emitter saturation voltage

Mechanical Data

- **Package:** SOT-89
- Molding compound meets UL 94 V-0 flammability rating, -compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** S43

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Minimum Collector-Emitter Voltage	V_{CEO}	V	$I_C=10mA, I_B=0$	50
Minimum Collector-Base Voltage	V_{CBO}	V	$I_C=100\mu A, I_E=0$	50
Minimum Emitter-Base Voltage	V_{EBO}	V	$I_E=100\mu A, I_C=0$	5
Collector Current	I_C	A		3
Collector Power Dissipation	P_C	mW		500
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	°C/W		250
Operation Junction Temperature	T_j	°C		-55 to +150
Storage Temperature	T_{stg}	°C		-55 to +150

PBSS4350X







■Electrical Characteristics (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	TYP	Max
Collector-Emitter Voltage	V_{CEO}	V	$I_C=10mA, I_B=0$	50		
Collector-Base Voltage	V_{CBO}	V	$I_C=100\mu A, I_E=0$	50		
Emitter-Base Voltage	V_{EBO}	V	$I_E=100\mu A, I_C=0$	5		
Collector-Base cut-off current	I_{CBO}	nA	$V_{CB}=50V$			100
Collector-Emitter cut-off current	I_{CES}	nA	$V_{CE}=50V, V_{BE}=0V$			100
Emitter-Base cut-off current	I_{EBO}	nA	$V_{EB}=5V$			100
DC Current Gain	h_{FE1}		$V_{CE}=2V, I_C=0.1A$	300		
	h_{FE2}		$V_{CE}=2V, I_C=0.5A$	300		
	h_{FE3}		$V_{CE}=2V, I_C=1A$	300		700
	h_{FE4}		$V_{CE}=2V, I_C=2A$	200		
	h_{FE5}		$V_{CE}=2V, I_C=3A$	100		
Collector-Emitter Saturation Voltage	$V_{CE(sat)1}$	mV	$I_C=0.5A, I_B=50mA$			80
	$V_{CE(sat)2}$	mV	$I_C=1A, I_B=50mA$			160
	$V_{CE(sat)3}$	mV	$I_C=2A, I_B=100mA$			280
	$V_{CE(sat)4}$	mV	$I_C=2A, I_B=200mA$			260
	$V_{CE(sat)5}$	mV	$I_C=3A, I_B=300mA$			370
Equivalent On-resistance	R_{CEsat}	mΩ	$I_C=2A, I_B=200mA$			130
Base-Emitter Saturation Voltage	$V_{BE(sat)1}$	V	$I_C=2A, I_B=100mA$			1.1
	$V_{BE(sat)2}$	V	$I_C=3A, I_B=300mA$			1.2
Base-Emitter Turn-on Voltage	$V_{BE(on)}$	V	$V_{CE}=2V, I_C=1A$			1.1
Transition Frequency	f_T	MHz	$I_C=100mA, V_{CE}=5V, f=100MHz$	100		
Collector Capacitance	C_{ob}	pF	$V_{CB}=10V, I_E=0A, f=1MHz$			25


■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PBSS4350X	F2	Approximate 0.055	1000	8000	32000	7" reel


■ Characteristics (Typical)

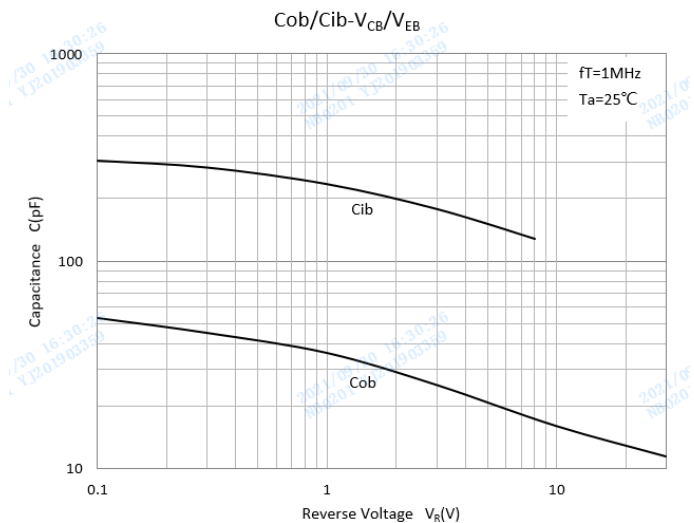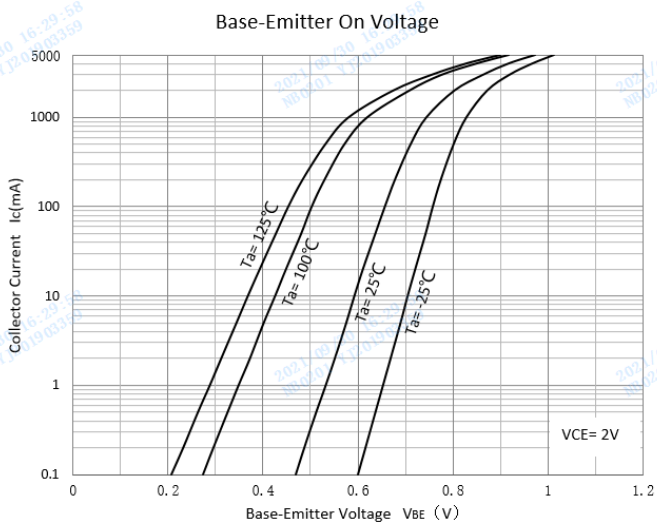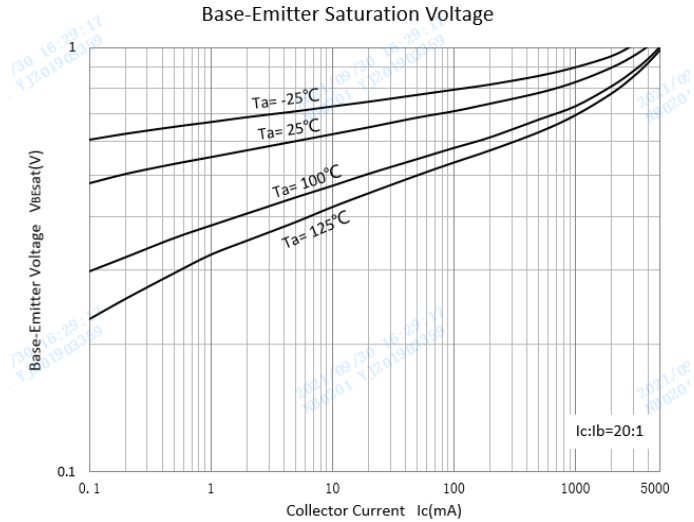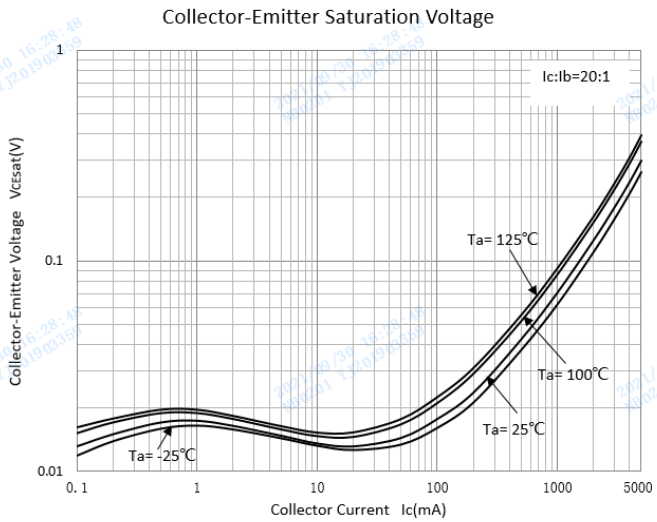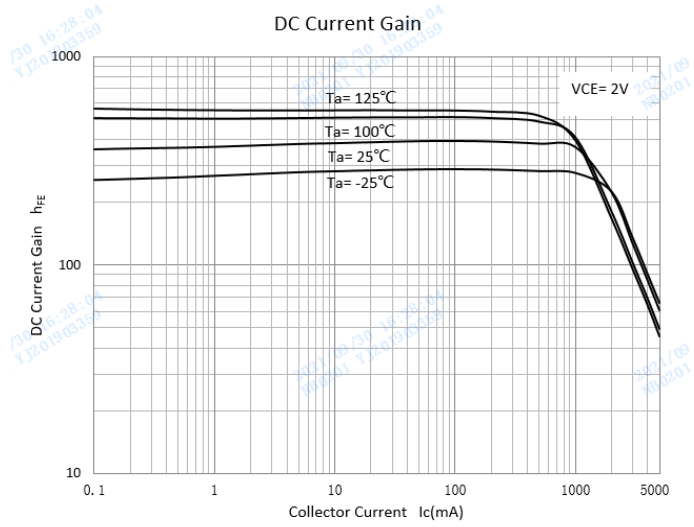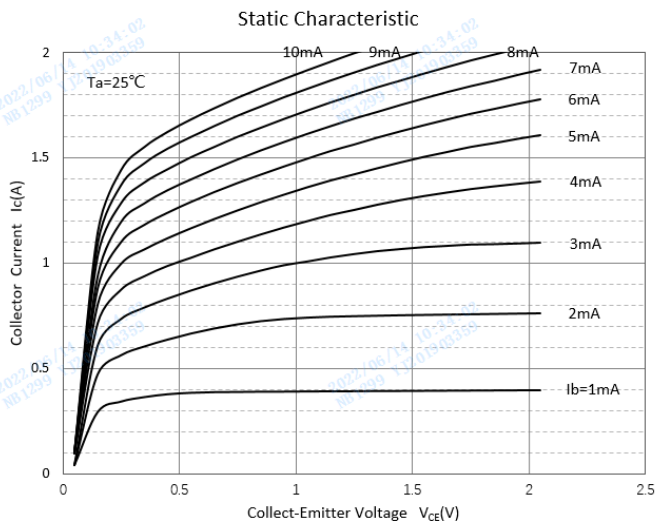

Collector Power Derating Curve

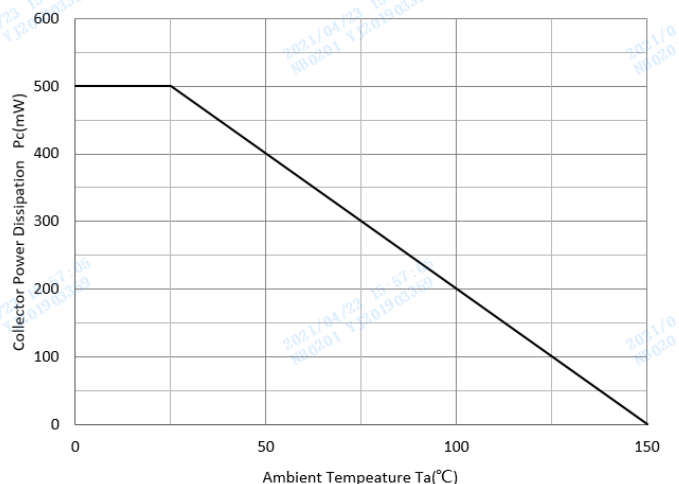


■SOT-89 Package Outline Dimensions

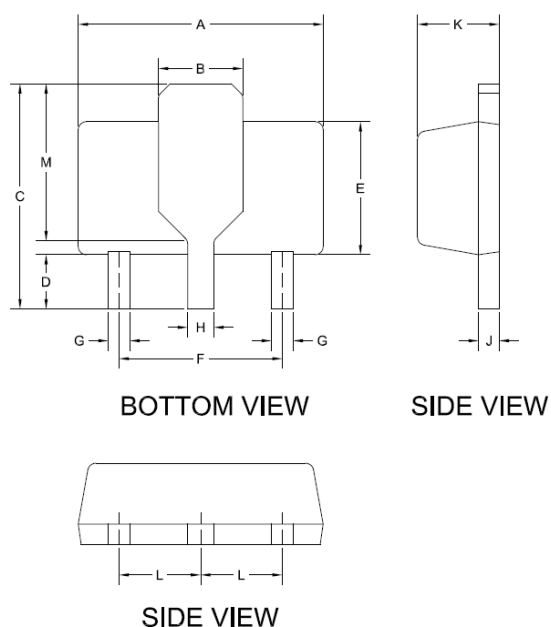

DIM	DIMENSIONS			
	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
A	0.173	0.181	4.400	4.600
B	0.061 TYP.		1.550 TYP.	
C	0.155	0.167	3.940	4.250
D	0.031	0.047	0.800	1.200
E	0.094	0.102	2.400	2.600
F	0.118 TYP.		3.00 TYP.	
G	0.014	0.019	0.360	0.480
H	0.017	0.022	0.440	0.560
J	0.014	0.017	0.350	0.440
K	0.055	0.063	1.400	1.600
L	0.059 TYP.		1.500 TYP.	
M	0.108 TYP.		2.750 TYP.	

■SOT-89 Suggested Pad Layout

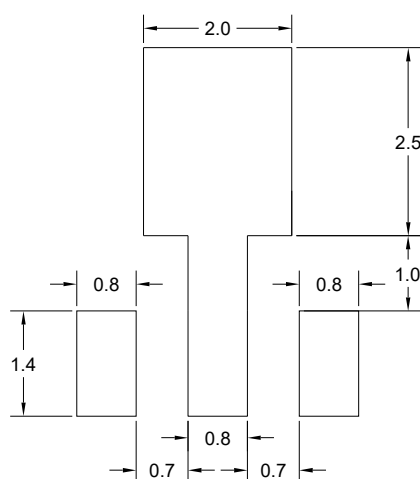

UNIT:MM

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.