



FRED Modules

V_{RRM} 400V


I_{FAV} 400 A

Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

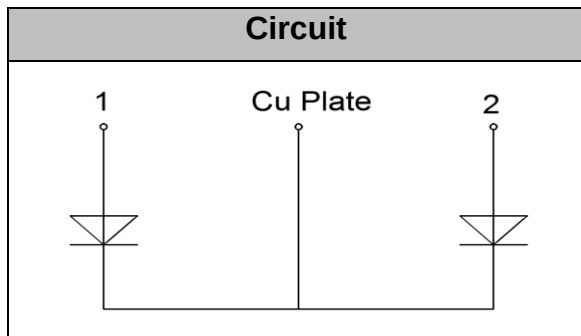

Maximum Ratings

Symbol	Conditions	Values	Units
V _R		400	V
V _{RRM}		400	V
I _{F(AV)}	T _C =125°C, Per Diode	200	A
	T _C =125°C, Per Module	400	A
I _{F(RMS)}	T _C =125°C, Per Diode	285	A
I _{FSM}	1/2 Cycle , 50Hz, Sine	6000	A
	1/2 Cycle , 60Hz, Sine	6580	A
I ² t	T _J =45°C, t=10ms, 50Hz, Sine	180000	A ² s
P _D		2000	W
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Torque	Recommended (M6)	3~4.7	N·m
Torque	Recommended (M6)	3~4.7	N·m
Weight		92	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per Module	0.06	°C/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=400V$	--	--	1	mA
	$V_R=400V, T_J=125^{\circ}C$	--	--	2	mA
V_F	$I_F=200A$	--	1.1	1.2	V
	$I_F=200A, T_J=125^{\circ}C$	--	0.92	1	V
t_{rr}	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	--	80	--	ns
t_{rr}	$V_R=200V, I_F=200A, di_F/dt=-200A/\mu s, T_J=25^{\circ}C$	--	140	--	ns
I_{RRM}		--	16	--	A
t_{rr}	$V_R=200V, I_F=200A, di_F/dt=-200A/\mu s, T_J=125^{\circ}C$	--	240	--	ns
I_{RRM}		--	30	--	A

Performance Curves

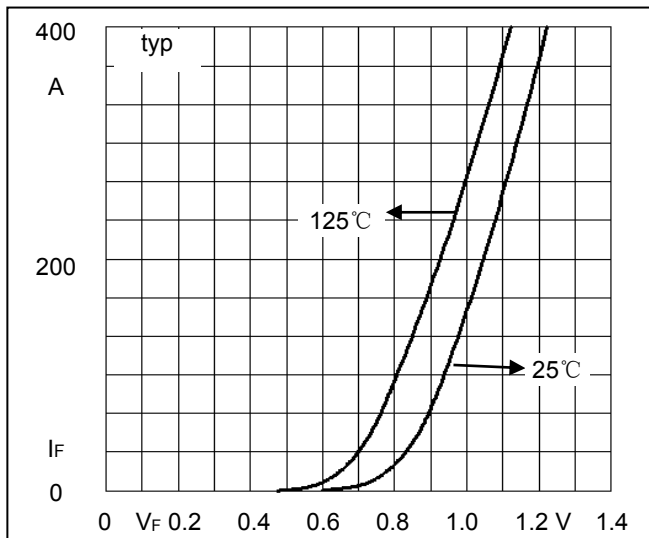


Fig1. Forward Voltage Drop vs Forward Current

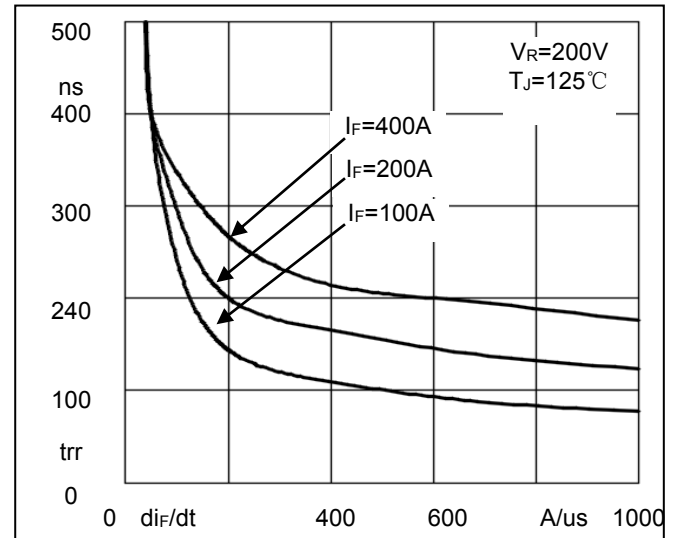


Fig2. Reverse Recovery Time vs di_F/dt

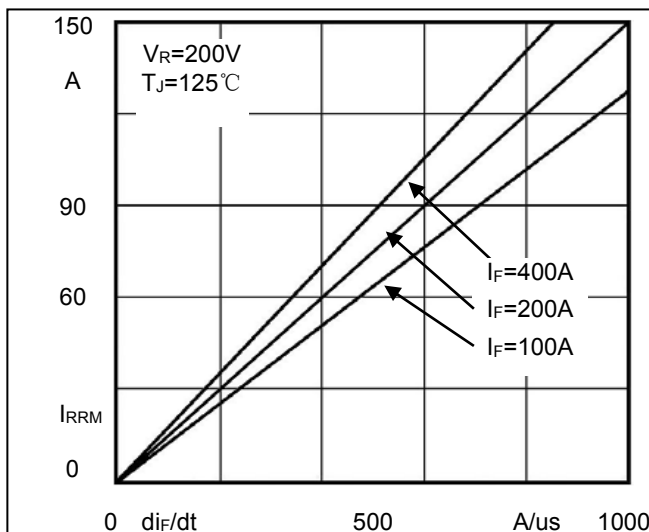


Fig3. Reverse Recovery Current vs di_F/dt


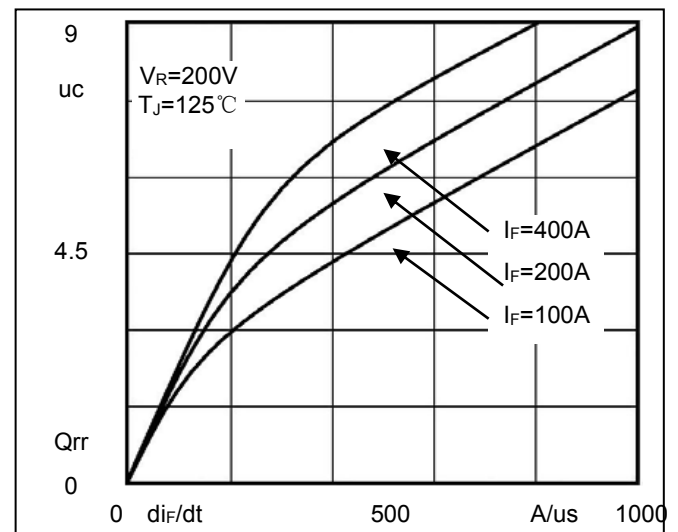


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F3

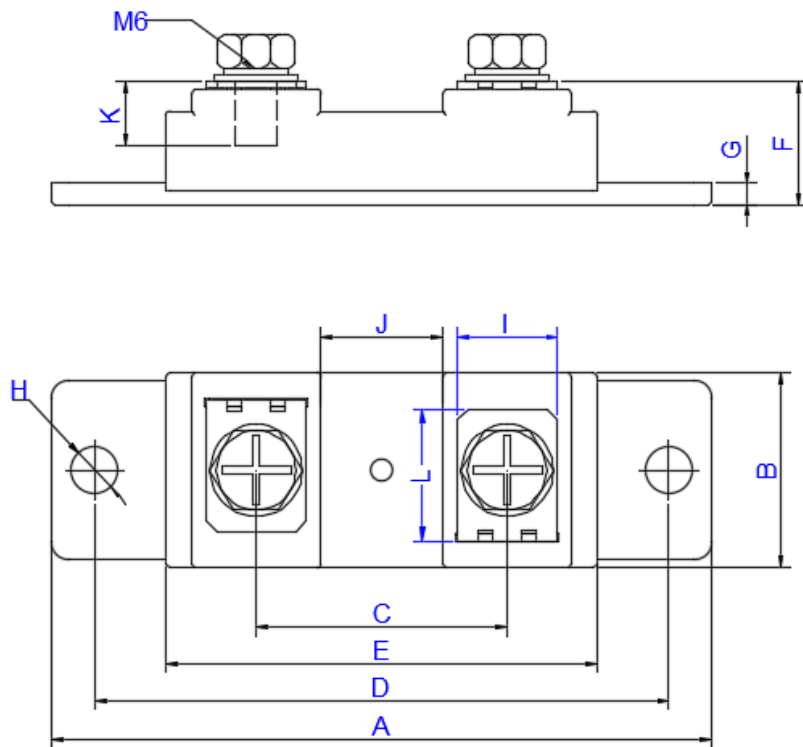

DIM	Min (mm)	Max (mm)	Note
A	91.5	92.5	
B	26.5	27.5	
C	34.5	35.5	
D	79.5	80.5	
E	59.5	60.5	
F	16.5	17.5	
G	2.8	3.2	
H	6.2	6.8	Ø
I	13.9	14.1	
J	16.5	17.5	
K	8	9	
L	18.3	18.6	