



## N-Channel Enhancement Mode Field Effect Transistor

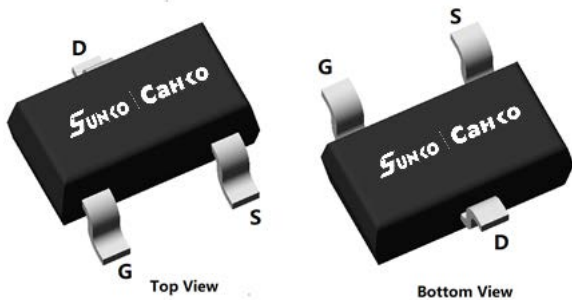

SOT-23-3L



### Product Summary

- $V_{DS}$  60V
- $I_D$  5.0A
- $R_{DS(ON)}$  (at  $V_{GS}=10V$ ) <44mohm
- $R_{DS(ON)}$  (at  $V_{GS}=4.5V$ ) <49mohm

### General Description

- Trench Power MV MOSFET technology
- High density cell design for Low  $R_{DS(ON)}$
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

### Applications

- PWM application
- Load switch

### ■ Absolute Maximum Ratings ( $T_A=25^{\circ}C$ unless otherwise noted)

| Parameter                                                          | Symbol                           | Limit    | Unit          |
|--------------------------------------------------------------------|----------------------------------|----------|---------------|
| Drain-source Voltage                                               | $V_{DS}$                         | 60       | V             |
| Gate-source Voltage                                                | $V_{GS}$                         | $\pm 20$ | V             |
| Drain Current                                                      | $T_A=25^{\circ}C$ @ Steady State | 5.0      | A             |
|                                                                    | $T_A=70^{\circ}C$ @ Steady State | 4.0      |               |
| Pulsed Drain Current <sup>A</sup>                                  | $I_{DM}$                         | 25       | A             |
| Total Power Dissipation @ $T_A=25^{\circ}C$                        | $P_D$                            | 2.5      | W             |
| Thermal Resistance Junction-to-Ambient @ Steady State <sup>B</sup> | $R_{\theta JA}$                  | 50       | $^{\circ}C/W$ |
| Junction and Storage Temperature Range                             | $T_J, T_{STG}$                   | -55~+150 | $^{\circ}C$   |

### ■ Ordering Information (Example)

| PREFERRED P/N | PACKING CODE | Marking | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|---------------|--------------|---------|----------------------|-------------------------|----------------------------|---------------|
| SCL05N06AL    | F1/F2        | 6005.   | 3000                 | 30000                   | 120000                     | 7" reel       |

## ■ Electrical Characteristics (T<sub>J</sub>=25℃ unless otherwise noted)

| Parameter                             | Symbol              | Conditions                                                                                               | Min | Typ  | Max  | Units |
|---------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------|-----|------|------|-------|
| Static Parameter                      |                     |                                                                                                          |     |      |      |       |
| Drain-Source Breakdown Voltage        | BV <sub>DSS</sub>   | V <sub>GS</sub> = 0V, I <sub>D</sub> =250μA                                                              | 60  |      |      | V     |
| Zero Gate Voltage Drain Current       | I <sub>DSS</sub>    | V <sub>DS</sub> =60V,V <sub>GS</sub> =0V                                                                 |     |      | 1    | μA    |
| Gate-Body Leakage Current             | I <sub>GSS</sub>    | V <sub>GS</sub> = ±20V, V <sub>DS</sub> =0V                                                              |     |      | ±100 | nA    |
| Gate Threshold Voltage                | V <sub>GS(th)</sub> | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> =250μA                                                | 1.0 | 1.5  | 2.5  | V     |
| Static Drain-Source On-Resistance     | R <sub>DS(ON)</sub> | V <sub>GS</sub> = 10V, I <sub>D</sub> =5.0A                                                              |     | 35   | 44   | mΩ    |
|                                       |                     | V <sub>GS</sub> = 4.5V, I <sub>D</sub> =4.0A                                                             |     | 39   | 49   |       |
| Diode Forward Voltage                 | V <sub>SD</sub>     | I <sub>S</sub> =5.0A,V <sub>GS</sub> =0V                                                                 |     | 0.8  | 1.2  | V     |
| Maximum Body-Diode Continuous Current | I <sub>S</sub>      |                                                                                                          |     |      | 5.0  | A     |
| Dynamic Parameters                    |                     |                                                                                                          |     |      |      |       |
| Input Capacitance                     | C <sub>iss</sub>    | V <sub>DS</sub> =30V,V <sub>GS</sub> =0V,f=1MHZ                                                          |     | 1018 |      | pF    |
| Output Capacitance                    | C <sub>oss</sub>    |                                                                                                          |     | 70   |      |       |
| Reverse Transfer Capacitance          | C <sub>rss</sub>    |                                                                                                          |     | 62   |      |       |
| Switching Parameters                  |                     |                                                                                                          |     |      |      |       |
| Total Gate Charge                     | Q <sub>g</sub>      | V <sub>GS</sub> =10V,V <sub>DS</sub> =30V,I <sub>D</sub> =10A                                            |     | 26.4 |      | nC    |
| Gate Source Charge                    | Q <sub>gs</sub>     |                                                                                                          |     | 5.4  |      |       |
| Gate Drain Charge                     | Q <sub>gd</sub>     |                                                                                                          |     | 6.5  |      |       |
| Reverse Recovery Charge               | Q <sub>rr</sub>     | I <sub>F</sub> =20A, di/dt=500A/us                                                                       |     | 11.7 |      | ns    |
| Reverse Recovery Time                 | t <sub>rr</sub>     |                                                                                                          |     | 23   |      |       |
| Turn-on Delay Time                    | t <sub>D(on)</sub>  | V <sub>GS</sub> =10V,V <sub>DD</sub> =30V, I <sub>D</sub> =2A,R <sub>L</sub> =1Ω<br>R <sub>GEN</sub> =3Ω |     | 10   |      |       |
| Turn-on Rise Time                     | t <sub>r</sub>      |                                                                                                          |     | 20   |      |       |
| Turn-off Delay Time                   | t <sub>D(off)</sub> |                                                                                                          |     | 29   |      |       |
| Turn-off Fall Time                    | t <sub>f</sub>      |                                                                                                          |     | 21   |      |       |

A. Pulse Test: Pulse Width ≤ 300us, Duty cycle ≤ 2%.

B. R<sub>θJA</sub> is the sum of the junction-to-lead and lead-to-ambient thermal resistance, where the lead thermal reference is defined as the solder mounting surface of the drain pins. R<sub>θJL</sub> is guaranteed by design, while R<sub>θJA</sub> is determined by the board design. The maximum rating presented here is based on mounting on a 1 in 2 pad of 2oz copper.

## ■ Typical Performance Characteristics

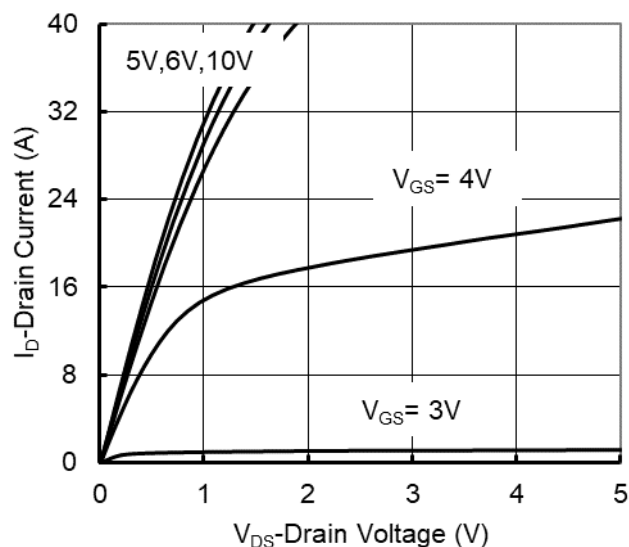


Figure 1. Output Characteristics

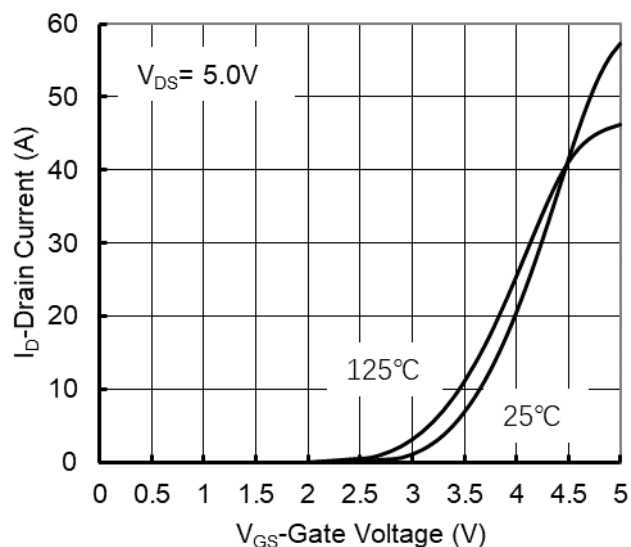


Figure 2. Transfer Characteristics

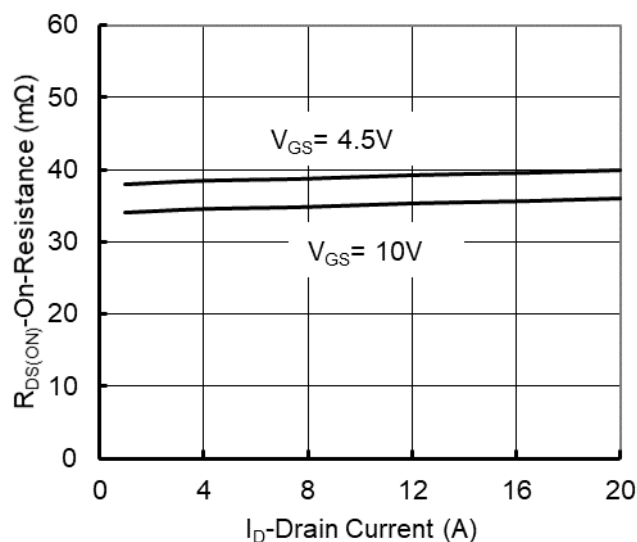


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

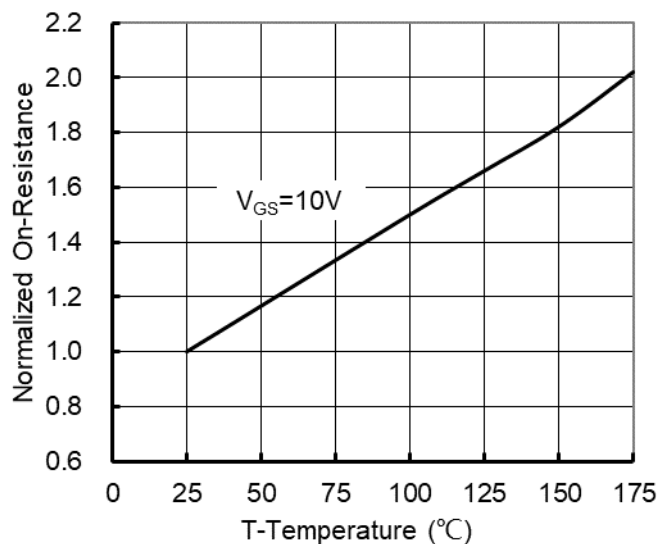


Figure 4. On-Resistance vs. Junction Temperature

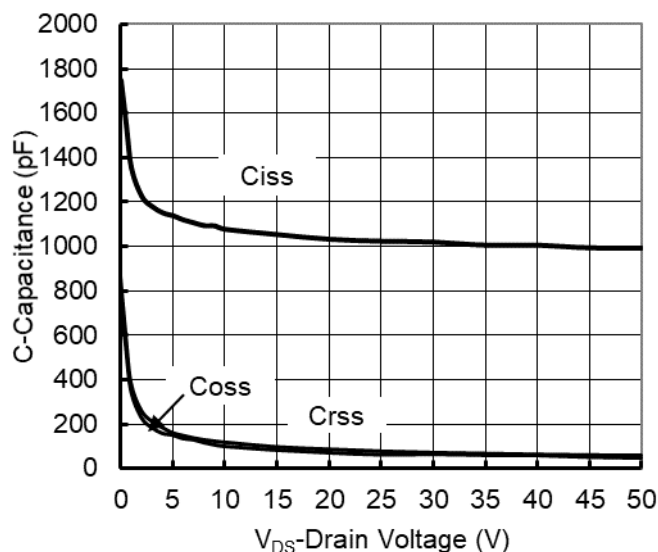


Figure 5. Capacitance Characteristics

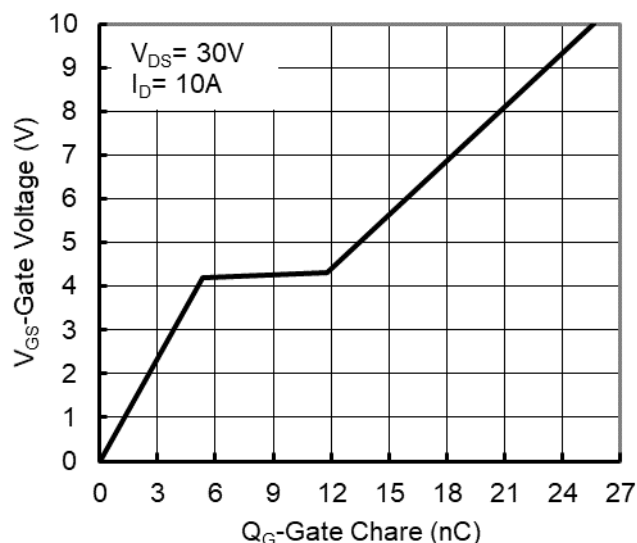


Figure 6. Gate Charge

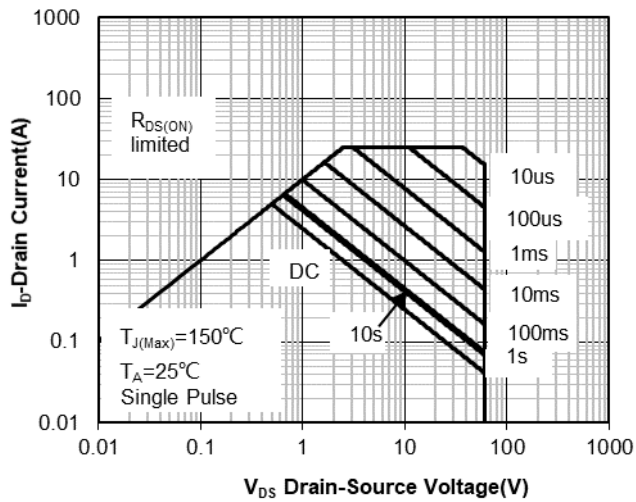


Figure 7. Safe Operation Area

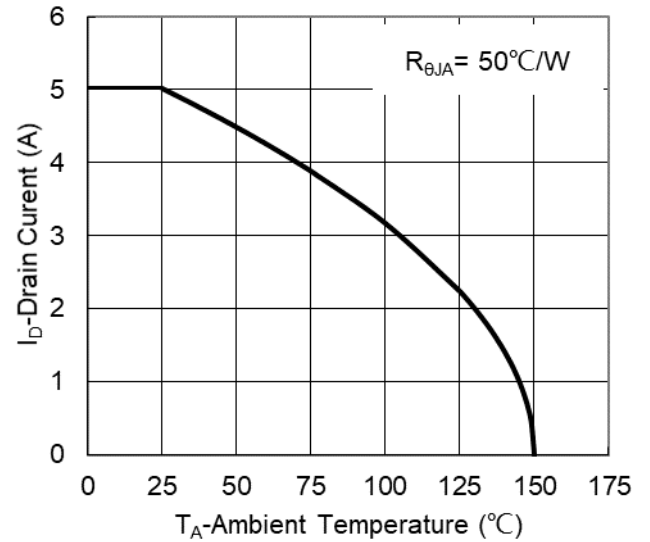


Figure 8. Maximum Continuous Drain Current vs Ambient Temperature





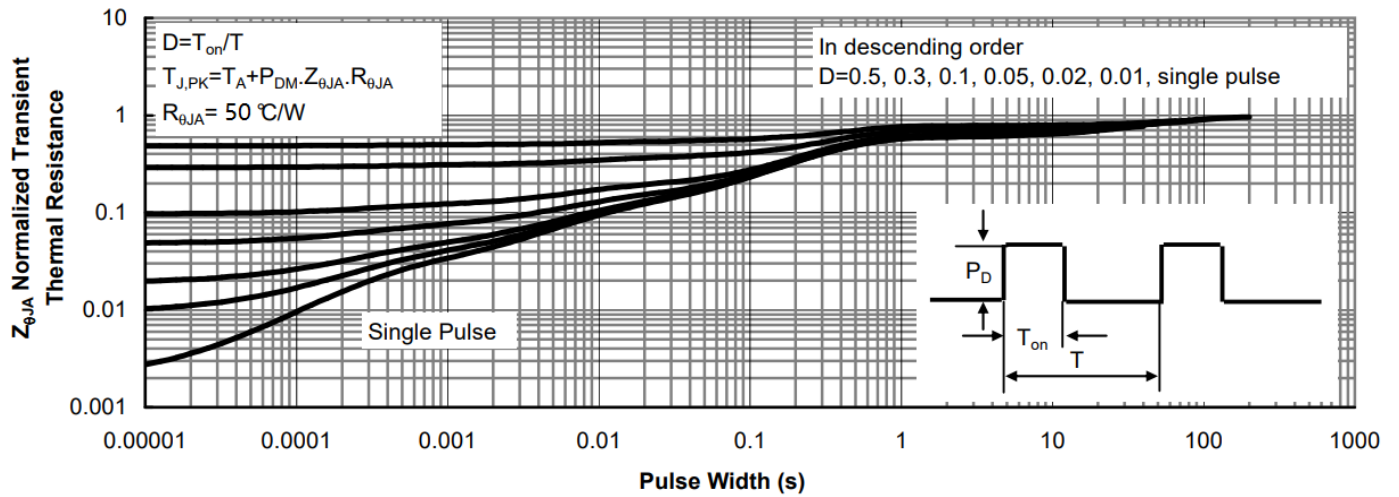




Figure 9. Normalized Maximum Transient Thermal Impedance

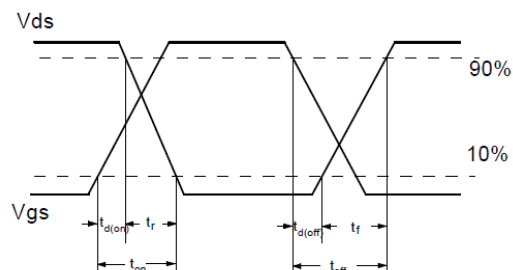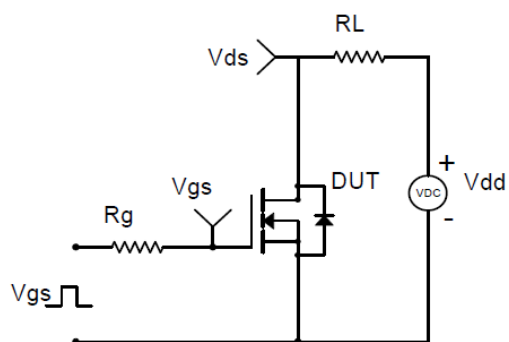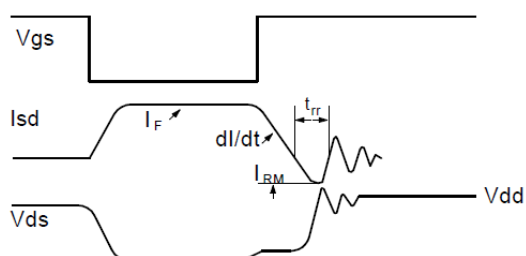



**Resistive Switching Test Circuit & Waveforms**

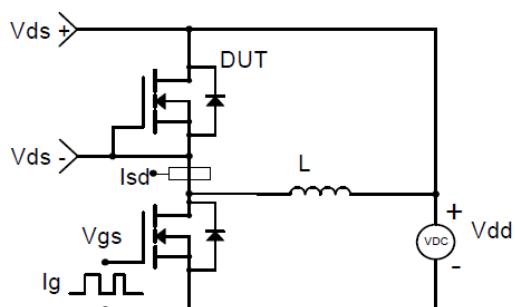

**Diode Recovery Test Circuit & Waveforms**



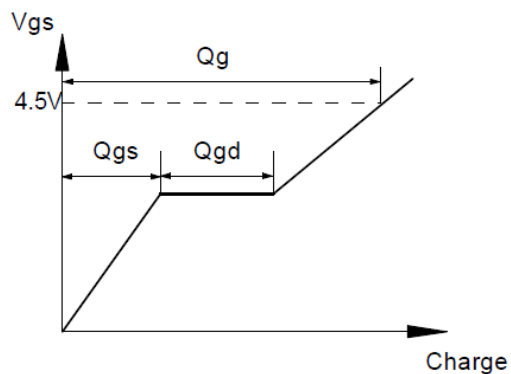
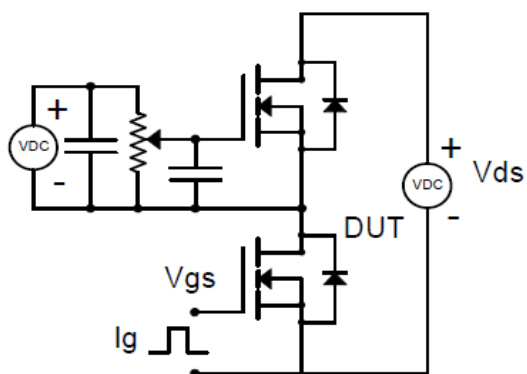


**Gate Charge Test Circuit & Waveform**

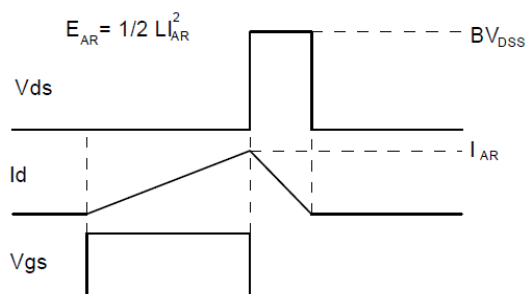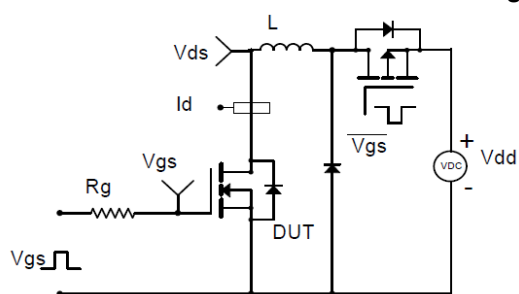

**Unclamped Inductive Switching (UIS) Test Circuit & Waveforms**

■SOT-23-3L Package information



SUGGESTED SOLDER PAD LAYOUT

| SYMBOL | DIMENSIONS |       |       |            |       |       |
|--------|------------|-------|-------|------------|-------|-------|
|        | INCHES     |       |       | Millimeter |       |       |
|        | MIN.       | NOM.  | MAX.  | MIN.       | NOM.  | MAX.  |
| A      | 0.041      | ---   | 0.049 | 1.050      | ---   | 1.250 |
| A1     | 0.000      | ---   | 0.008 | 0.000      | ---   | 0.200 |
| A2     | 0.041      | 0.043 | 0.045 | 1.050      | 1.100 | 1.150 |
| b      | 0.012      | 0.016 | 0.020 | 0.300      | 0.400 | 0.500 |
| c      | 0.004      | ---   | 0.008 | 0.100      | ---   | 0.200 |
| D      | 0.111      | 0.115 | 0.119 | 2.820      | 2.920 | 3.020 |
| E      | 0.059      | 0.063 | 0.067 | 1.500      | 1.600 | 1.700 |
| E1     | 0.104      | 0.110 | 0.116 | 2.650      | 2.800 | 2.950 |
| e      | 0.037 TYP  |       |       | 0.950 TYP  |       |       |
| e1     | 0.071      | 0.075 | 0.079 | 1.800      | 1.900 | 2.000 |
| L      | 0.024 REF  |       |       | 0.600 REF  |       |       |
| L1     | 0.012      | 0.018 | 0.024 | 0.300      | 0.450 | 0.600 |
| θ      | 0°         | ---   | 8°    | 0°         | ---   | 8°    |

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

**Disclaimer**

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) or consult your nearest Russiansunco's sales office for further assistance.