


2-Line un-directional TVS Diode Array

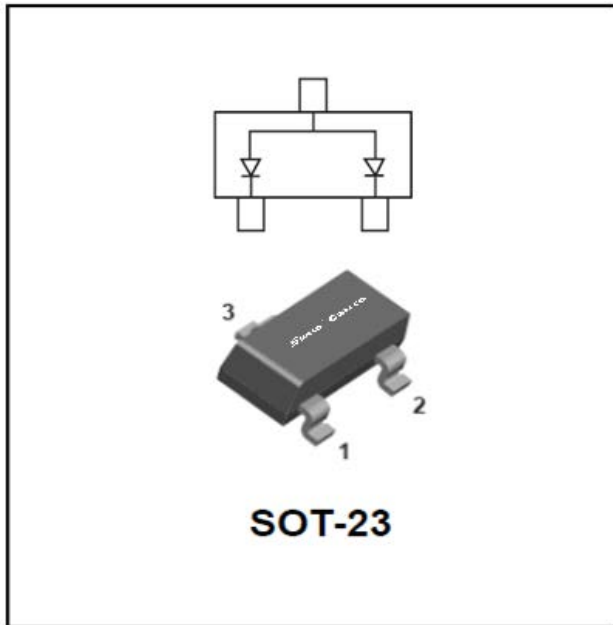


Features

- 320W peak pulse power (8/20μs)
- Protects two un-directional lines
- Ultra low leakage: nA level
- Operating voltage: 5V
- Low clamping voltage
- Compliant

Mechanical Characteristics

- Package: SOT-23
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below



■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C
ESD per IEC 61000-4-2 (Air)	V _{ESD}	±30	KV
ESD per IEC 61000-4-2 (Contact)		±30	KV
Peak Pulse Power(8/20μs)	P _{PK}	320	W
Peak Pulse Current(8/20μs)	I _{PP}	23	A

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Working Voltage	V _{RWM}	V				5
Reverse Leakage Current	I _R	uA	V _{RWM} =5V any I/O pin to ground			0.5
Forward Voltage	V _F	V	I _F =10mA	0.2	0.8	1.2
Breakdown Voltage	V _(BR)	V	I _T =1mA	6		
Clamping Voltage	V _C	V	I _{PP} =1A (8 x 20μs pulse) any I/O pin to ground			8
Clamping Voltage	V _C	V	I _{PP} =23A (8 x 20μs pulse) any I/O pin to ground			14
Junction Capacitance	C _J	pF	V _R =0V, f=1MHz , any I/O pin to ground		160	


■ Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	ASM05
Thermal Resistance(Typical)	R _{θJA}	°C/W	357
	R _{θJC}	°C/W	143


■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ASM05	F2	Approximate 8	3000	30000	120000	7" reel


■ Characteristics (Typical)

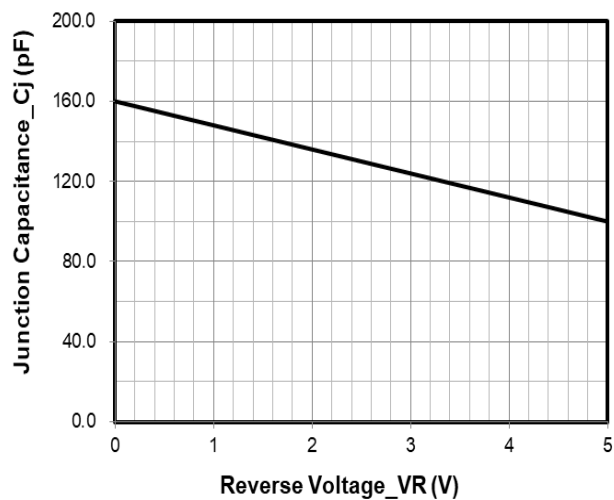


Junction Capacitance vs. Reverse Voltage

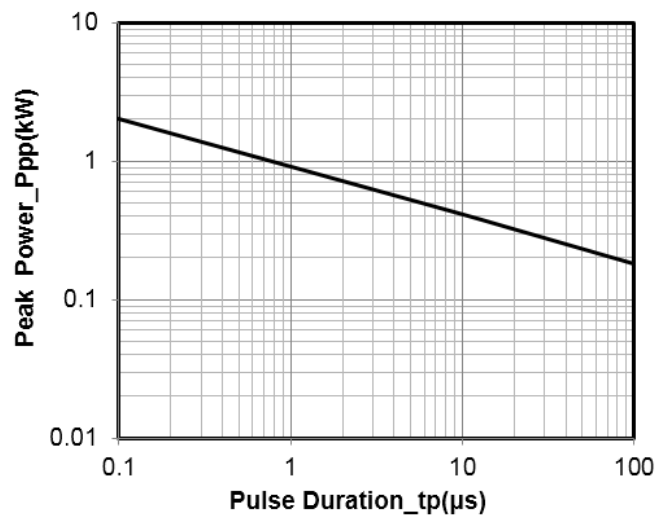


Peak Pulse Power vs. Pulse Time

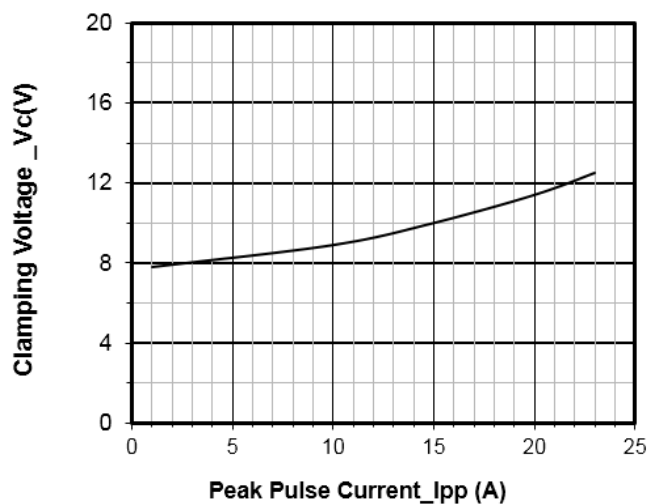


Clamping Voltage vs. Peak Pulse Current

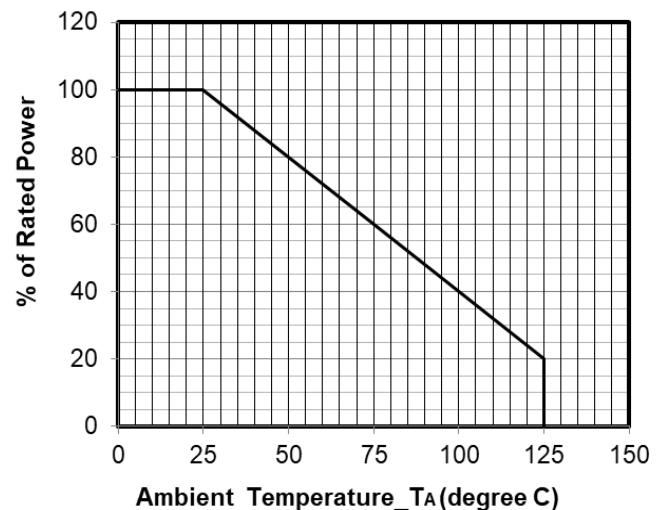

Power Derating Curve

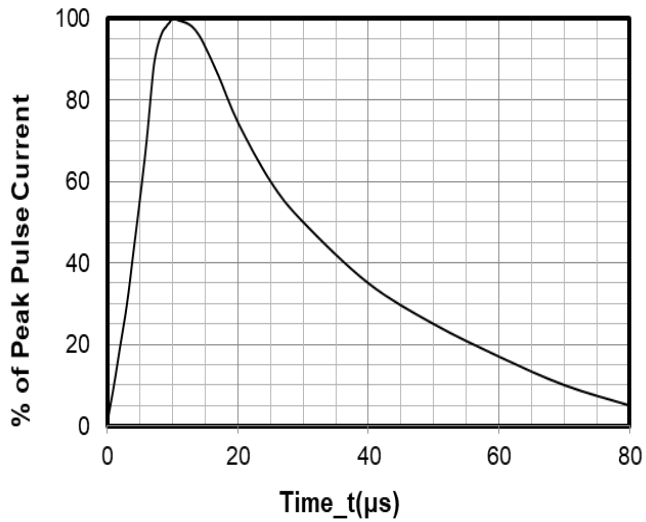


8 X 20μs Pulse Waveform

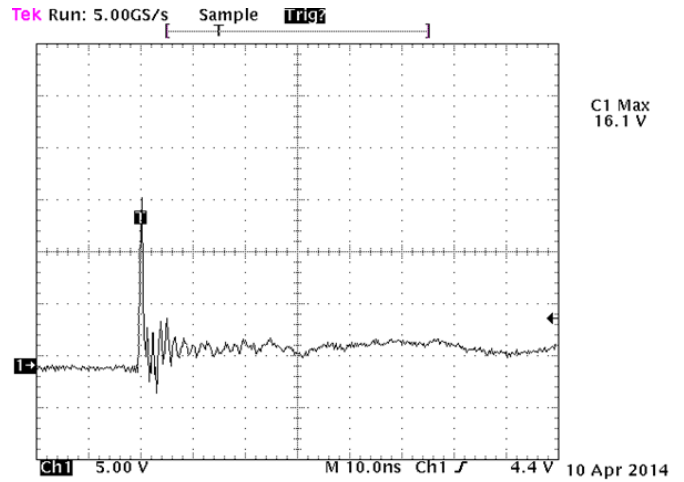


Note: Data is taken with a 10x attenuator
ESD Clamping Voltage
8 kV Contact per IEC61000-4-2

■ Outline Dimensions

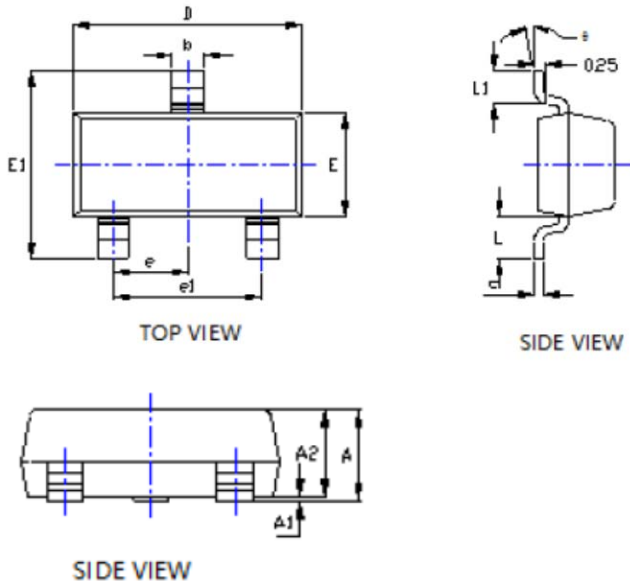

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
φ	0°	8°	0°	8°

■ Soldering Footprint

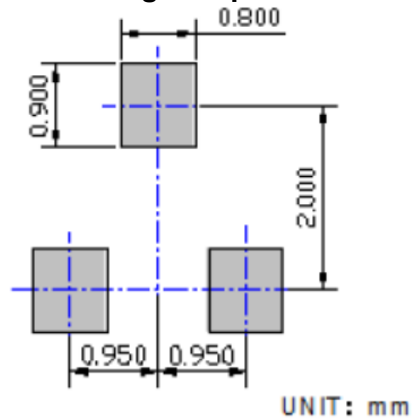

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.