


## 1-Line, Uni-directional, Transient Voltage Suppressor

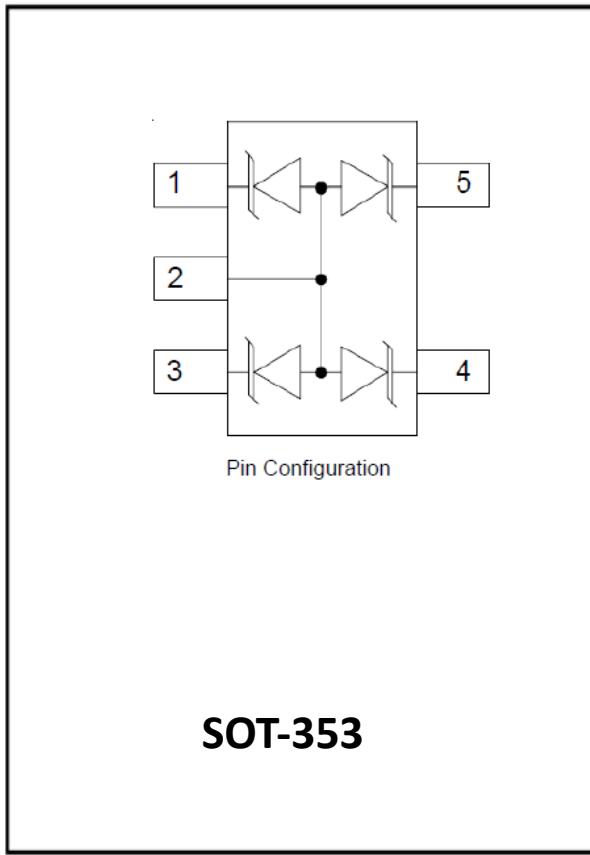

### Features


- Ultra small package
- Stand-off voltage: 5V Max
  - Transient protection for each line according to IEC61000-4-2(ESD):  $\pm 30\text{kV}$  (contact)
  - IEC61000-4-5(surge): 8A (8/20 $\mu\text{s}$ )
- Low leakage current
- Low clamping voltage
- Compliant

### Applications


- Peripherals
- Industrial Equipment
- Notebook Computers
- Portable Instrumentation
- Microprocessor Based Equipment
- Cell Phone Handsets and Accessories
- Personal Digital Assistants (PDAs) and Pagers

### Mechanical Characteristics

- Package: SOT-353
- Case Material: "Green" Molding Compound.
- Marking Information: See Below

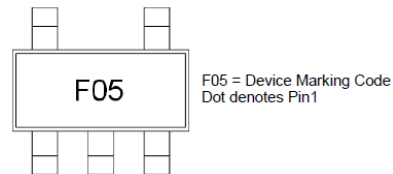

### ■Definitions of electrical characteristics

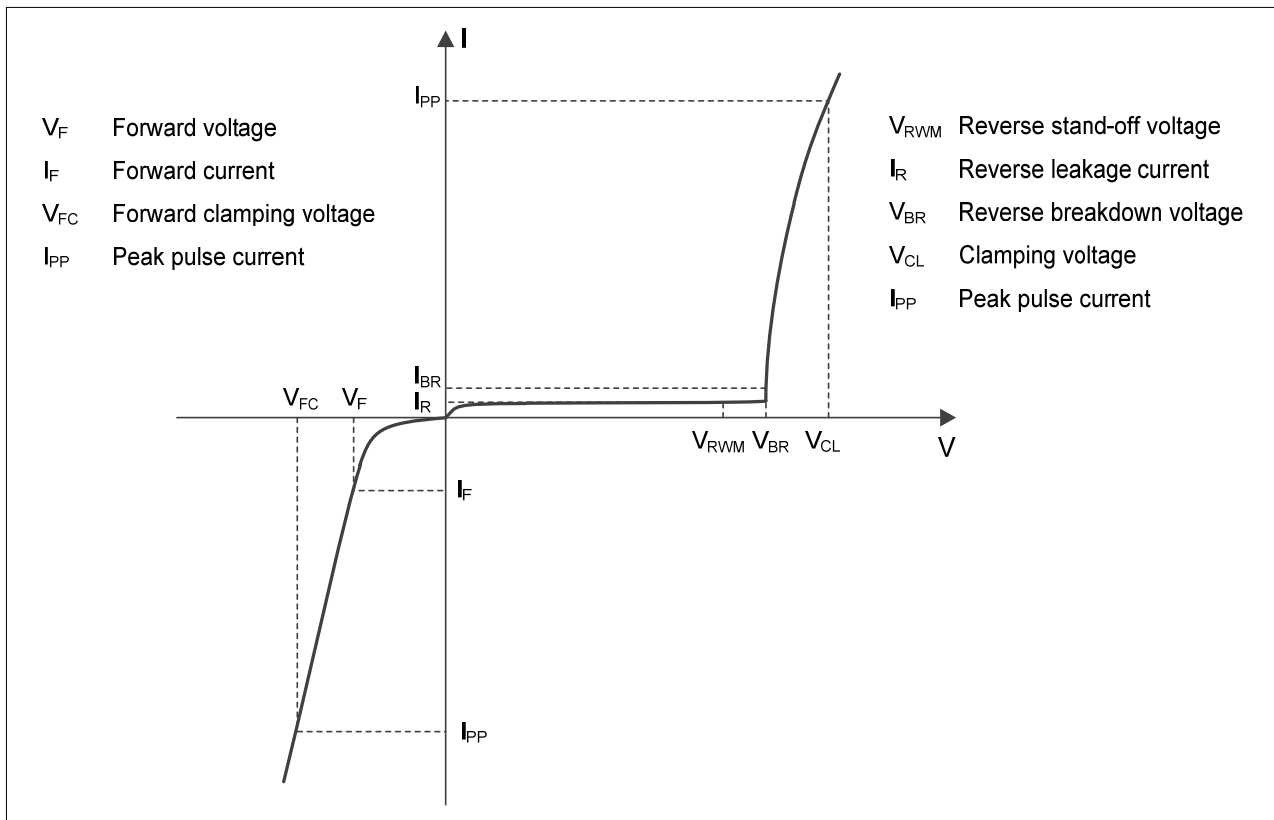

## ■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	Rating	UNIT
Peak pulse power ( $t_p = 8/20\mu s$ )	$P_{pk}$	96	W
Peak pulse current ( $t_p = 8/20\mu s$ )	$I_{PP}$	8	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	KV
ESD according to IEC61000-4-2 contact discharge		$\pm 8$	KV
Junction temperature	$T_J$	-55~125	°C
Storage temperature	$T_{STG}$	-55~150	°C

## ■Electrical Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse maximum working voltage	$V_{RWM}$	V				5
Reverse leakage current	$I_R$	$\mu A$	$V_{RWM} = 5V$			0.2
Reverse breakdown voltage	$V_{BR}$	V	$I_{BR} = 1mA$	6		8.5
Clamping voltage <sup>3)</sup>	$V_{CL}$	V	$I_{PP} = 1A, t_p = 8/20\mu s$			9
		V	$I_{PP} = 8A, t_p = 8/20\mu s$			12
Junction capacitance	$C_J$	pF	$V_R = 0V, f = 1MHz$		60	

(1). TLP parameter:  $Z_0 = 50\Omega$ ,  $t_p = 100ns$ ,  $t_r = 2ns$ , averaging window from 60ns to 80ns.  $R_{DYN}$  is calculated from 4A to 16A.

(2). Contact discharge mode, according to IEC61000-4-2.


(3). Non-repetitive current pulse, according to IEC61000-4-5.

## ■Ordering Information (Example)


PREFERRED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESD0514T3	F2	Approximate 7	3000	30000	120000	7" reel

■ Typical Performance Characteristics ( $T_a=25^\circ\text{C}$  unless otherwise Specified)


8/20 $\mu\text{s}$  waveform per IEC61000-4-5

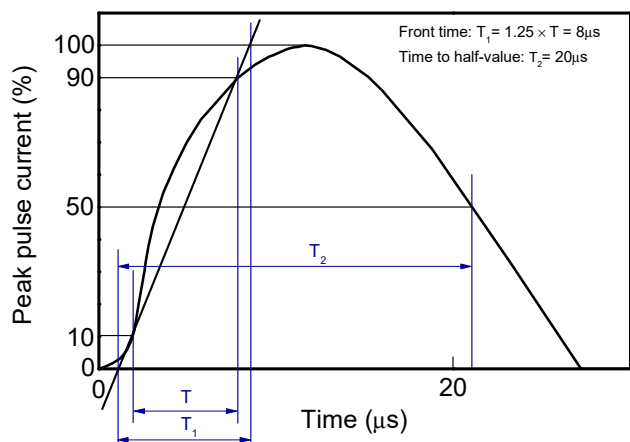


Contact discharge current waveform per IEC61000-4-2

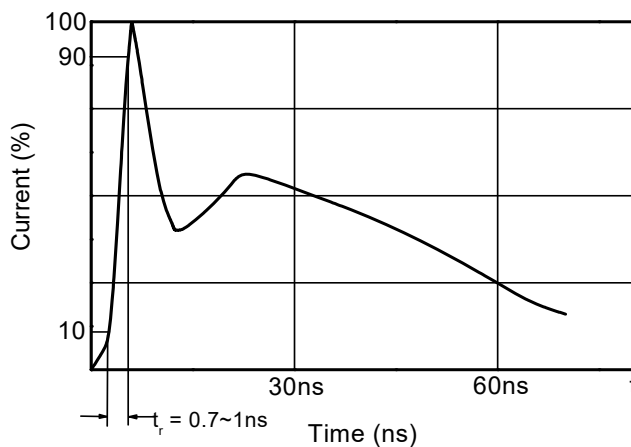


Clamping voltage vs. Peak pulse current

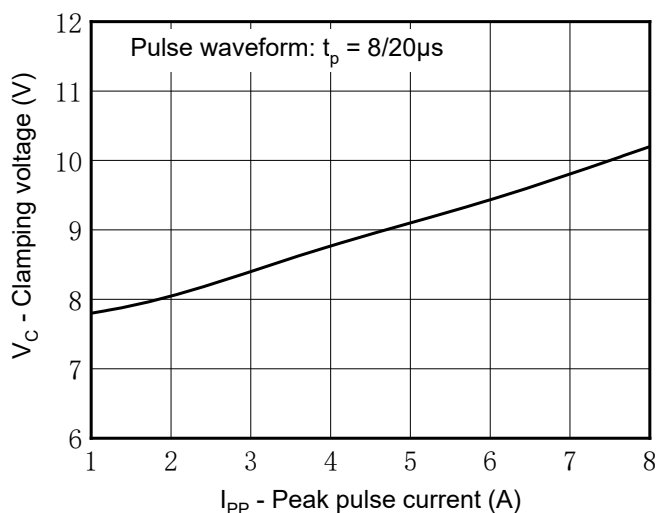


Capacitance vs. Reverse voltage

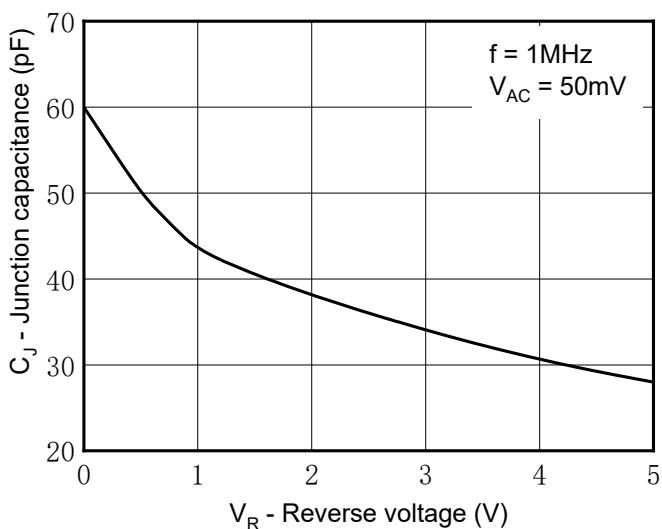


Non-repetitive peak pulse power vs. Pulse time

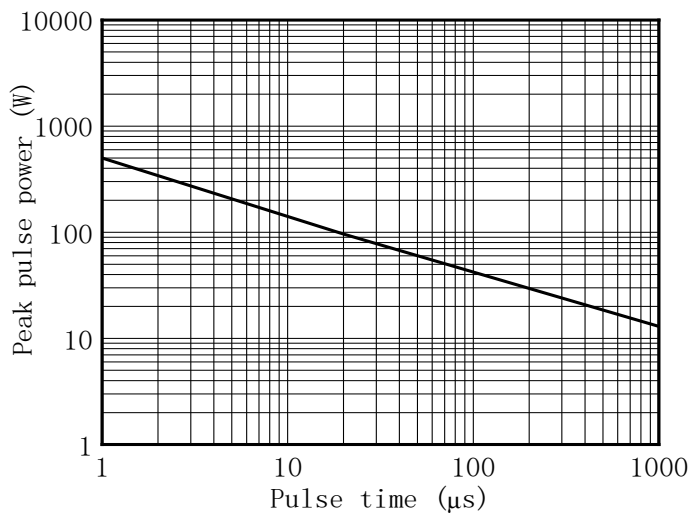

Power derating vs. Ambient temperature

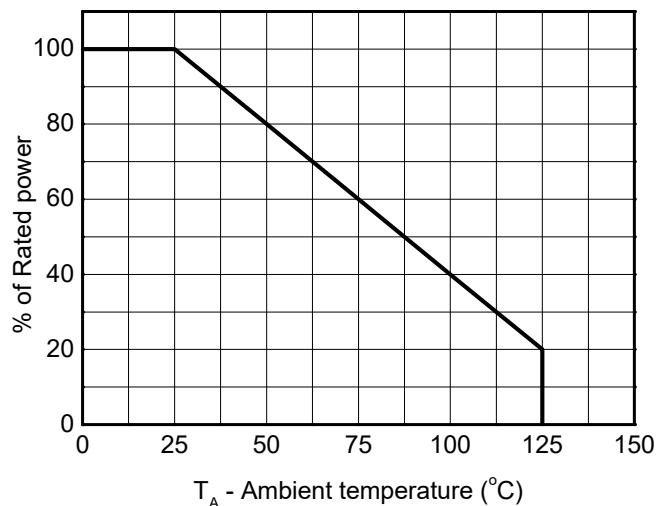


## ■ Outline Dimensions

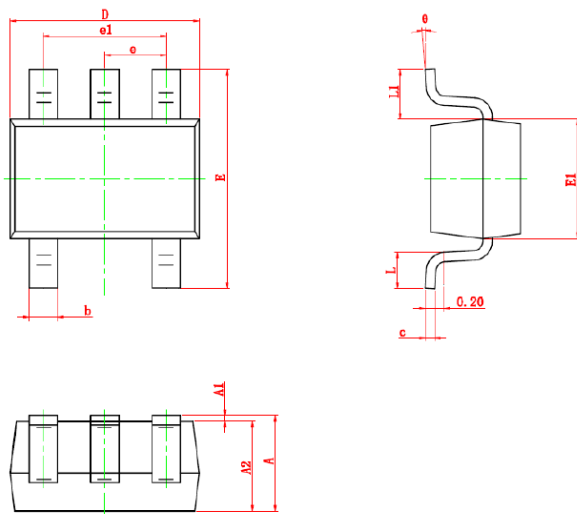

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.900	-	1.100	0.035	-	0.043
A1	0.000	-	0.100	0.000	-	0.004
A2	0.900	-	1.000	0.035	-	0.039
b	0.150	-	0.350	0.006	-	0.014
c	0.080	-	0.150	0.003	-	0.006
D	2.000	-	2.200	0.079	-	0.087
E	2.150	-	2.450	0.085	-	0.096
E1	1.150	-	1.350	0.045	-	0.053
e	0.650 TYP.			0.026 TYP.		
e1	1.200	-	1.400	0.047	-	0.055
L	0.260	-	0.460	0.010	-	0.018
L1	0.525 REF.			0.021 REF.		
θ	0°	-	8°	0°	-	8°

## ■ Recommend land pattern

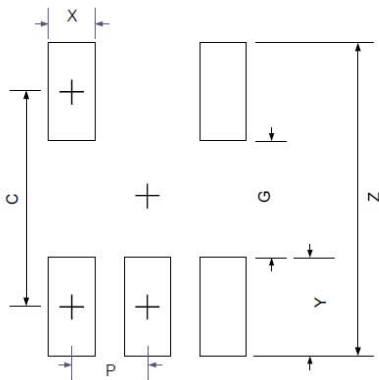

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	1.85	0.073
G	1.00	0.039
P	0.65	0.026
X	0.40	0.016
Y	0.85	0.033
Z	2.70	0.106

### Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met

**Disclaimer**

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.