


## 2-Line, Bi-directional, Transient Voltage Suppressor

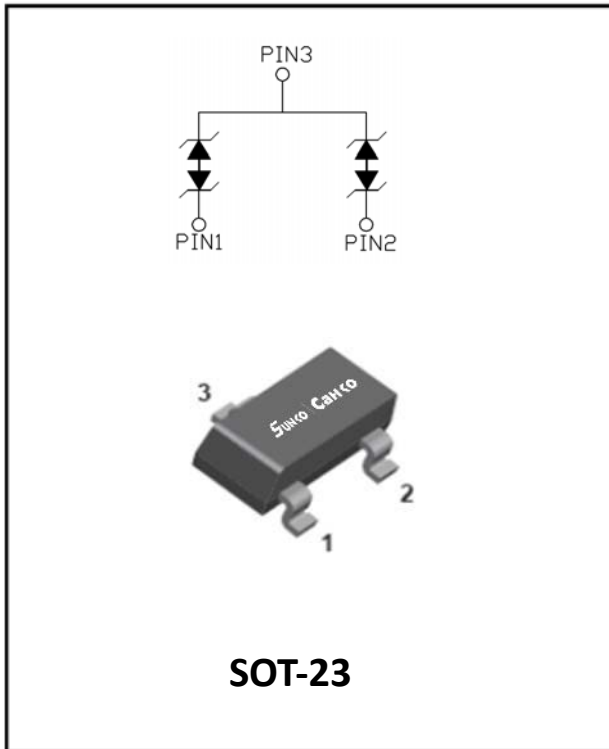

### Features


- Stand-off voltage:  $\pm 5V$  Max
- Transient protection for each line according to  
IEC61000-4-2(ESD):  $\pm 8kV$  (contact)  
IEC61000-4-5(surge): 2A (8/20 $\mu s$ )
- Low leakage current:
- Ultra low clamping voltage
- Compliant

### Applications


- Cellular Handsets and Accessories
- Notebooks and Handhelds
- Personal Digital Assistants
- Portable Instrumentation
- Digital Cameras
- Peripherals
- Audio Players, Keypads, Side Keys, LCD
- USB 2.0

### Mechanical Data

- Package: SOT-23
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below



### Definitions of electrical characteristics

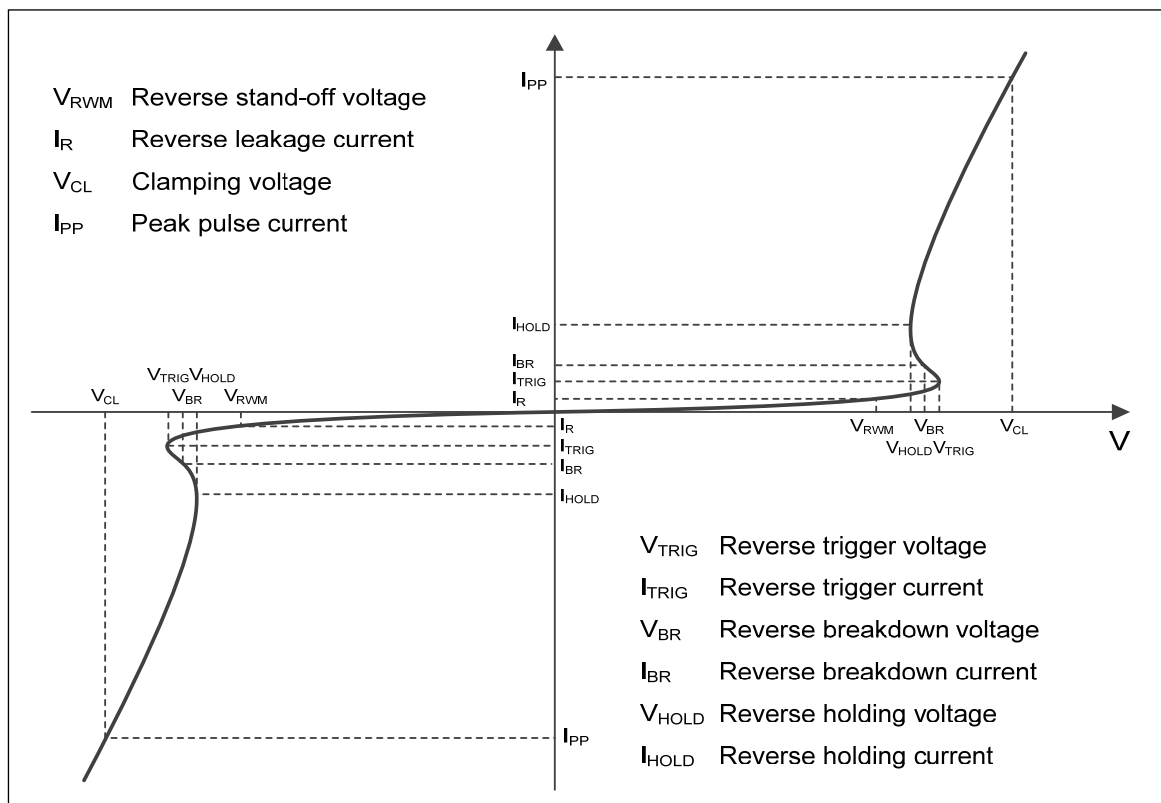

**■Maximum Ratings**

| PARAMETER                                       | SYMBOL    | LIMITS   | UNIT |
|-------------------------------------------------|-----------|----------|------|
| Peak pulse power ( $t_p = 8/20\mu s$ )          | $P_{pk}$  | 28       | W    |
| Peak pulse current ( $t_p = 8/20\mu s$ )        | $I_{PP}$  | 2        | A    |
| ESD according to IEC61000-4-2 air discharge     | $V_{ESD}$ | $\pm 15$ | KV   |
| ESD according to IEC61000-4-2 contact discharge |           | $\pm 8$  |      |
| Junction temperature                            | $T_J$     | -55~125  | °C   |
| Storage temperature                             | $T_{STG}$ | -55~150  | °C   |

**■Electrical Characteristics ( $T_a=25^\circ C$  Unless otherwise specified)**

| PARAMETER                       | Symbol    | UNIT    | Conditions                                          | Min | Typ | Max     |
|---------------------------------|-----------|---------|-----------------------------------------------------|-----|-----|---------|
| Reverse maximum working voltage | $V_{RWM}$ | V       |                                                     |     |     | $\pm 5$ |
| Reverse leakage current         | $I_R$     | $\mu A$ | $V_{RWM} = 5V$<br>Pin1/Pin2 to Pin3                 |     |     | 0.5     |
| Reverse breakdown voltage       | $V_{BR}$  | V       | $I_T = 1mA$<br>Pin1/Pin2 to Pin3                    | 5.5 |     | 9.5     |
| Clamping voltage <sup>1)</sup>  | $V_{CL}$  | V       | $I_{PP} = 1A, t_p = 8/20\mu s$<br>Pin1/Pin2 to Pin3 |     |     | 11      |
|                                 |           | V       | $I_{PP} = 2A, t_p = 8/20\mu s$<br>Pin1/Pin2 to Pin3 |     |     | 14      |
| Junction capacitance            | $C_J$     | pF      | $V_R = 0V, f = 1MHz$<br>Pin1/Pin2 to Pin3           |     | 3   | 5       |

Notes:

(1). Non-repetitive current pulse, according to IEC61000-4-5.

**■Ordering Information (Example)**

| PREFERRED P/N | PACKING CODE | UNIT WEIGHT(mg) | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|---------------|--------------|-----------------|----------------------|-------------------------|----------------------------|---------------|
| ESDLC0502EB   | F2           | Approximate 8   | 3000                 | 30000                   | 120000                     | 7" reel       |

## ■ Characteristics (Typical)

Fig.1 8/20 $\mu$ s waveform per IEC61000-4-5

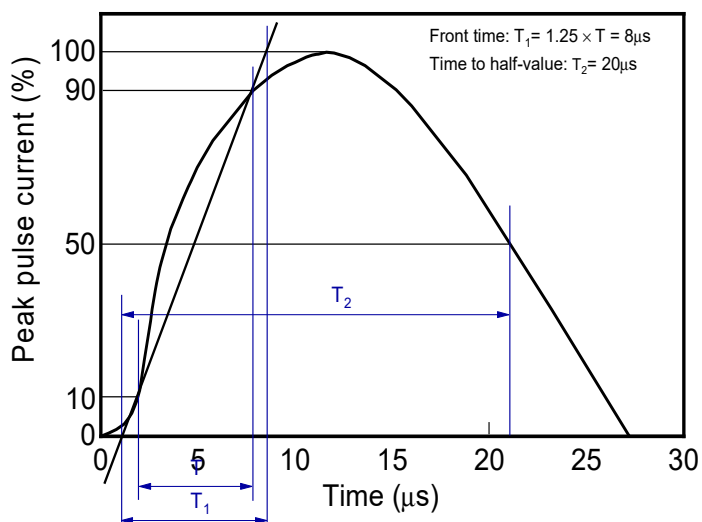


Fig.2 Contact discharge current waveform per IEC61000-4-2

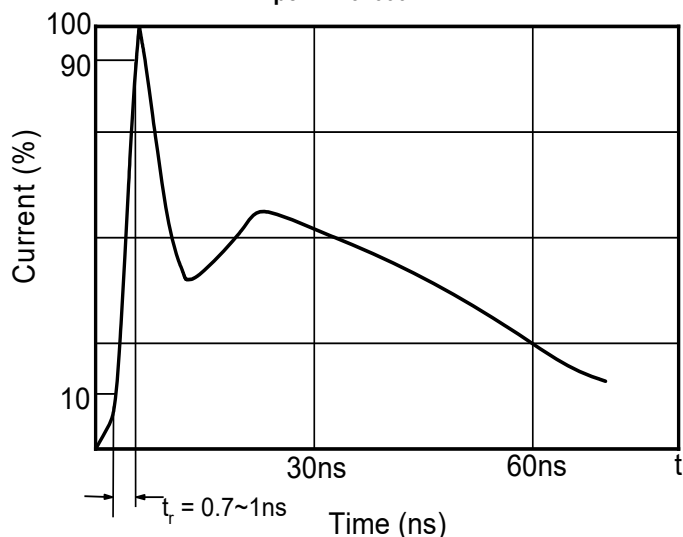


Fig.3 Clamping voltage vs. Peak pulse current

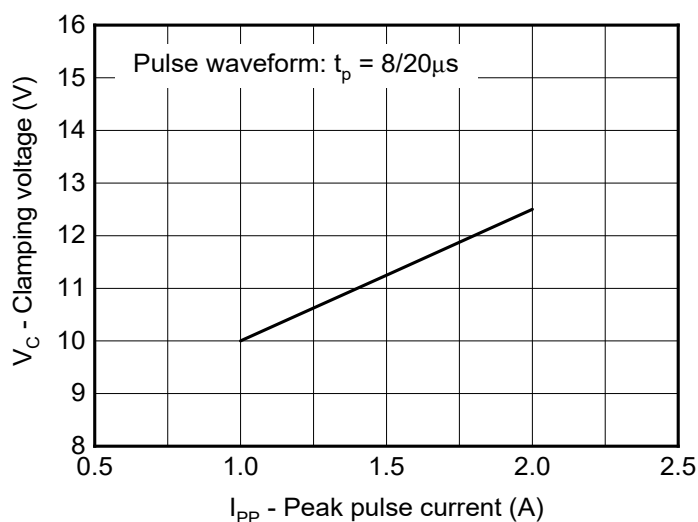


Fig.4 Capacitance vs. Reverse voltage

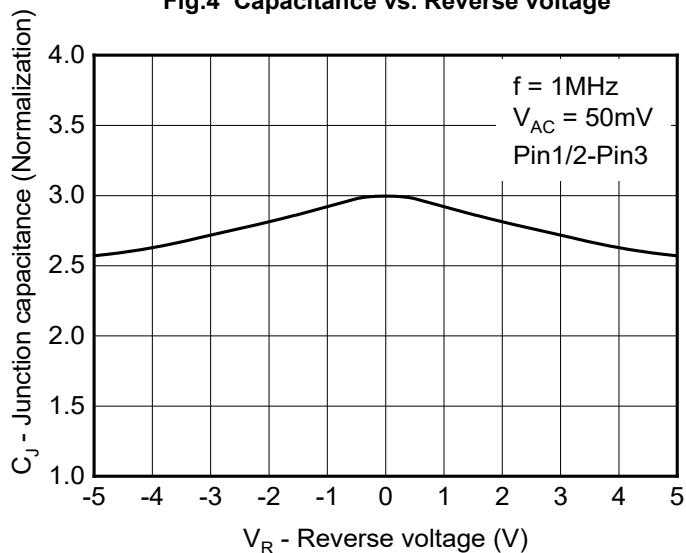


Fig.5 Non-repetitive peak pulse power vs. Pulse time



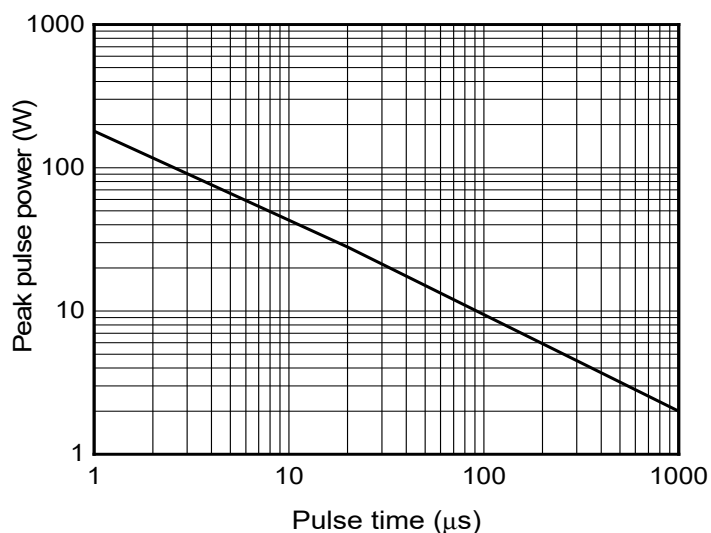


Fig.6 Power derating vs. Ambient temperature

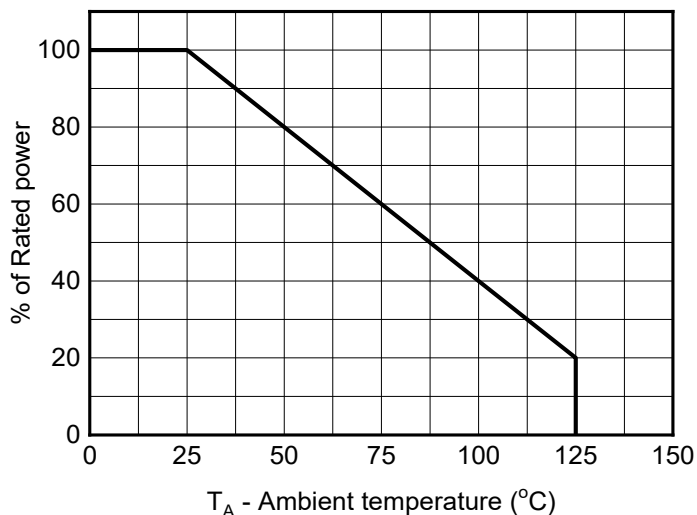


■ Outline Dimensions

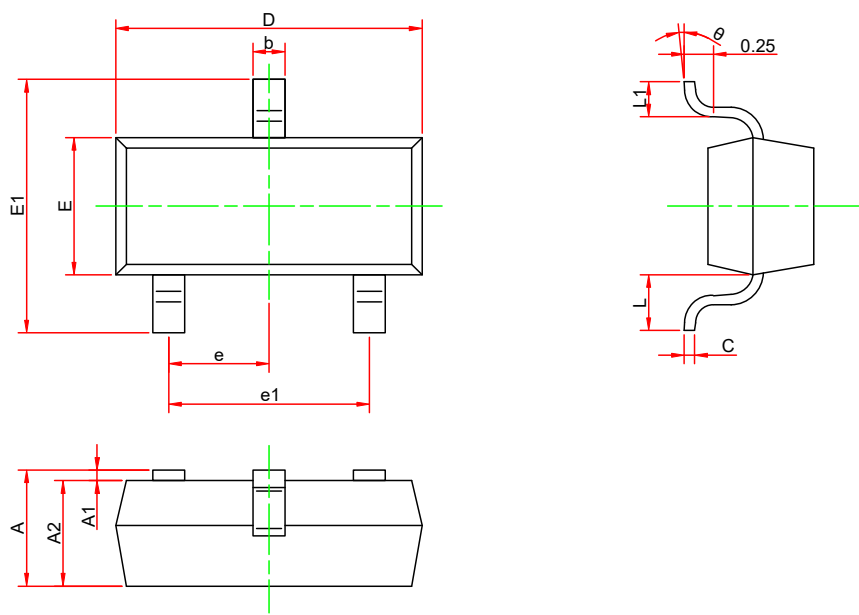

| Symbol | Dimensions in millimeters |      |       |
|--------|---------------------------|------|-------|
|        | Min.                      | Typ. | Max.  |
| A      | 0.900                     | -    | 1.150 |
| A1     | 0.000                     | -    | 0.100 |
| A2     | 0.900                     | -    | 1.050 |
| b      | 0.300                     | -    | 0.500 |
| c      | 0.100                     | -    | 0.200 |
| D      | 2.800                     | -    | 3.000 |
| E      | 1.200                     | -    | 1.400 |
| E1     | 2.250                     | -    | 2.550 |
| e      | 0.950TYP                  |      |       |
| e1     | 1.800                     | -    | 2.000 |
| L      | 0.550REF                  |      |       |
| L1     | 0.300                     | -    | 0.500 |
| θ      | 0°                        | -    | 8°    |

■ Soldering Footprint

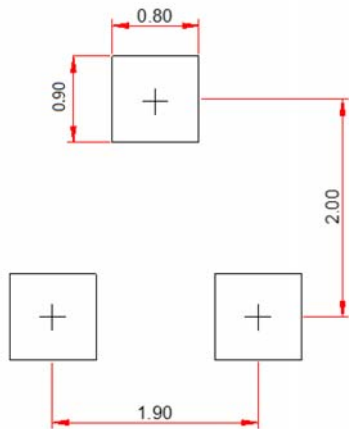

**Disclaimer**

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.