


1-Line,Bi-directional, Transient Voltage Suppressor

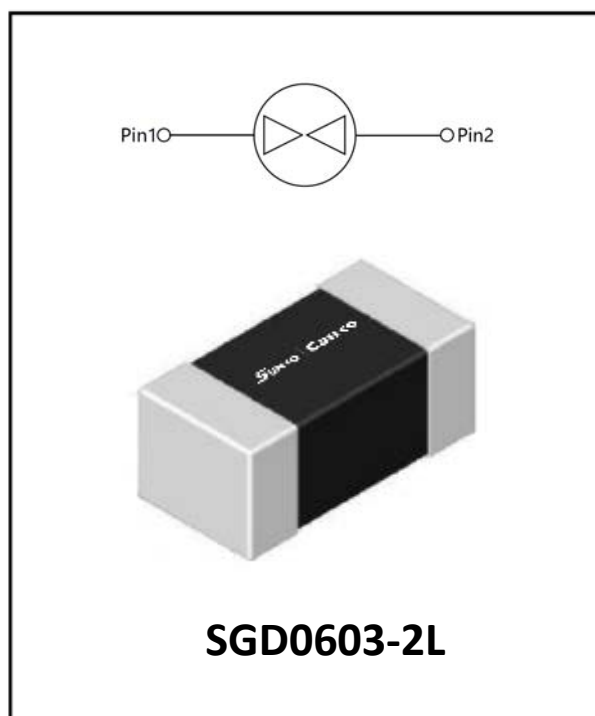

Features

- Ultra small package
- Stand-off voltage: 30V Max
- Transient protection for each line according to
IEC61000-4-2(ESD): ±25kV (air)
IEC61000-4-2(ESD): ±15kV (contact)
- Low leakage current
- Low clamping voltage
- Compliant

Applications

- Smart Phone/Mobile Interment Device
- Loptop/Desktop Computer
- Antennas
- High Speed Ethernet
- Lightning and Thunder Bolt interface
- USB 2.0 and USB 3.0

Mechanical Characteristics

- Package: SGD0603-2L
- Moisture Sensitivity: Level 1 per J-STD-020
- Case Material: Glass Fiber Epoxy Resin
- Marking Information: None

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	Value	Units
Response time	Trise	<0.5	ns
ESD according to IEC61000-4-2 air discharge	V _{ESD}	±25	kV
ESD according to IEC61000-4-2 contact discharge		±15	
Operation ambient temperature	T _{OPT}	-55~+125	°C
Storage temperature range	T _{STG}	-55~+150	°C

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

Part No.	Working Voltage	Typical ESD Trigger Voltage	Typical ESD Clamping Voltage at 60ns	Leakage Current (at Initial State)	Leakage Current (after ESD Test)	Cap. Value at 1MHz (typ)	Cap. Value at 1MHz (max)
Symbol	VDC (max)	Vtrigger (typ)	VC (typ)	ILDC	ILDCA	Cj (typ)	Cj (max)
Unit	V	V	V	μA	μA	pF	pF
ESDM6V0M0	6	300	30	<0.1	<0.1	0.05	0.08
ESDM12VM0	12	300	30	<0.1	<0.1	0.05	0.08
ESDM24VM0	24	300	30	<0.1	<0.1	0.05	0.08
ESDM30VM0	30	300	30	<0.1	<0.1	0.05	0.08

■ **Ordering Information (Example)**

PREFERED P/N	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDM6V0M0~ ESDM30VM0	Approximate 0.12	15000	150000	600000	Tae& reel

■ **ESD Testing Circuit and Testing Results**


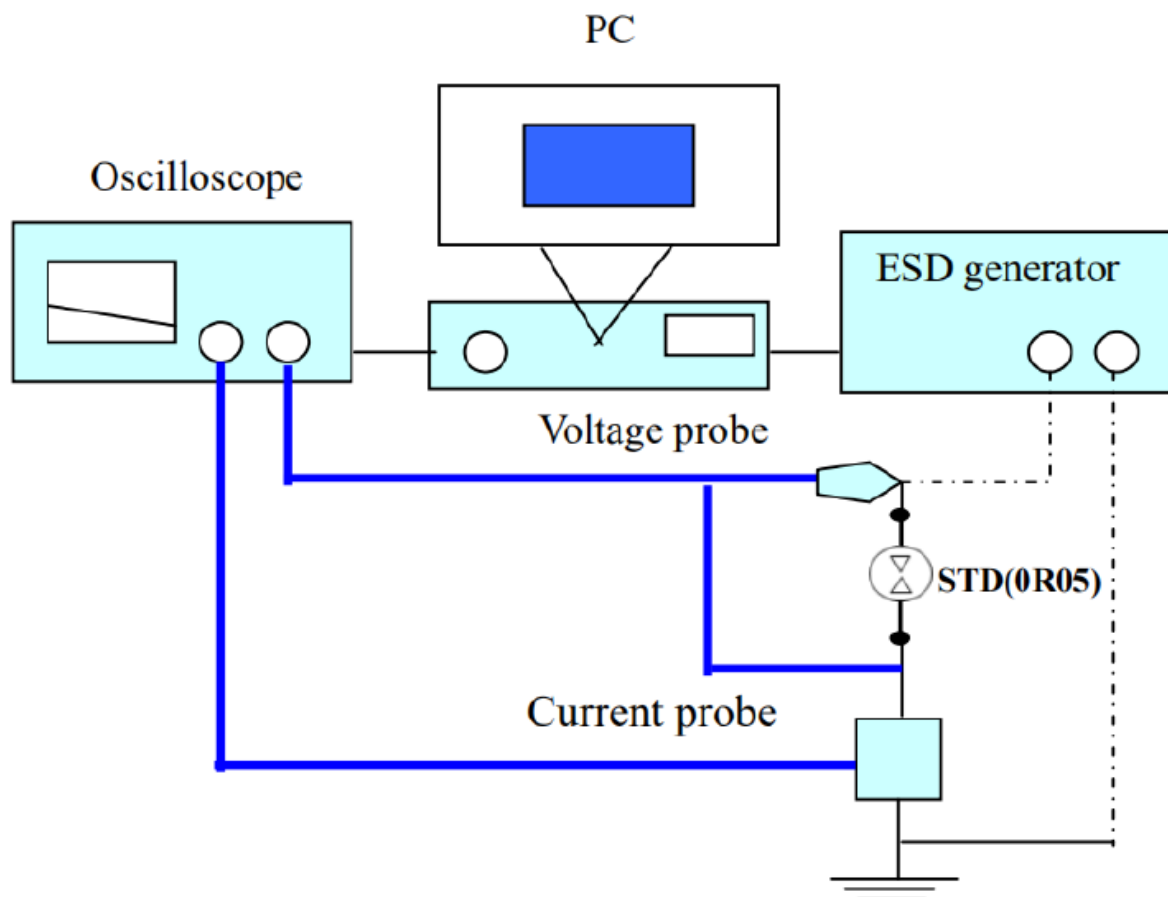


Fig 2 (A) ESD testing circuit

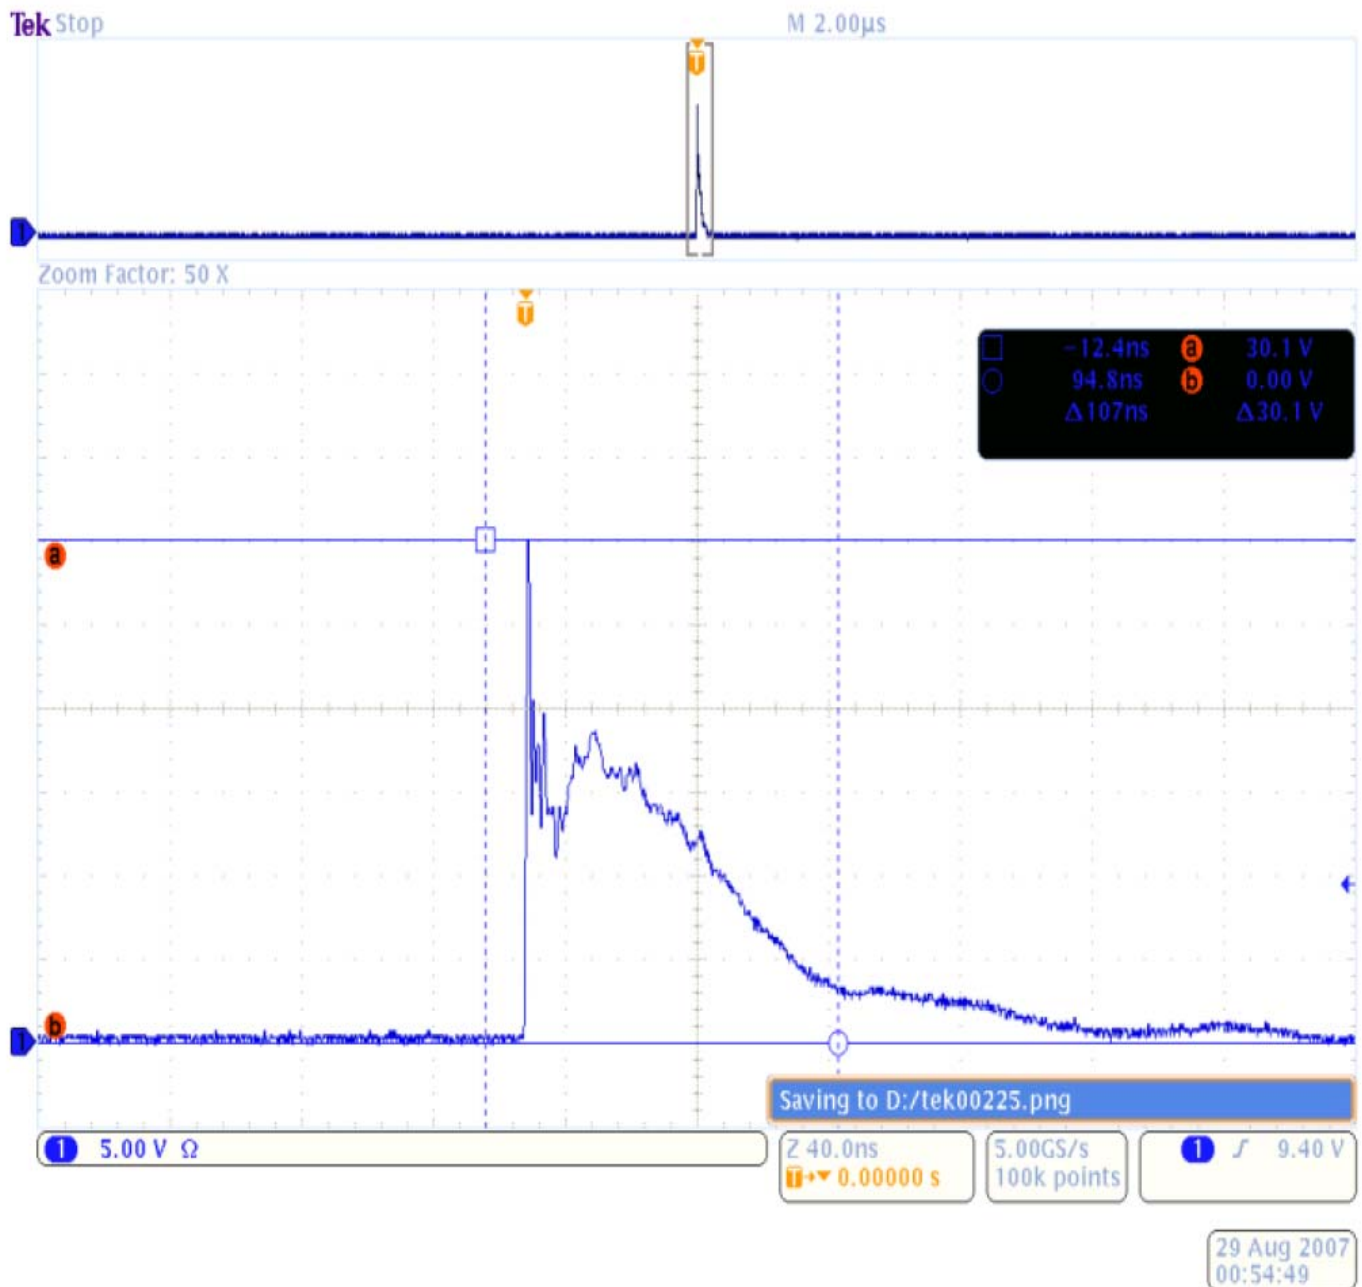

Test with high voltage probe of attenuation factor $\times 250$
Fig 2 (B) without ESD protection sample

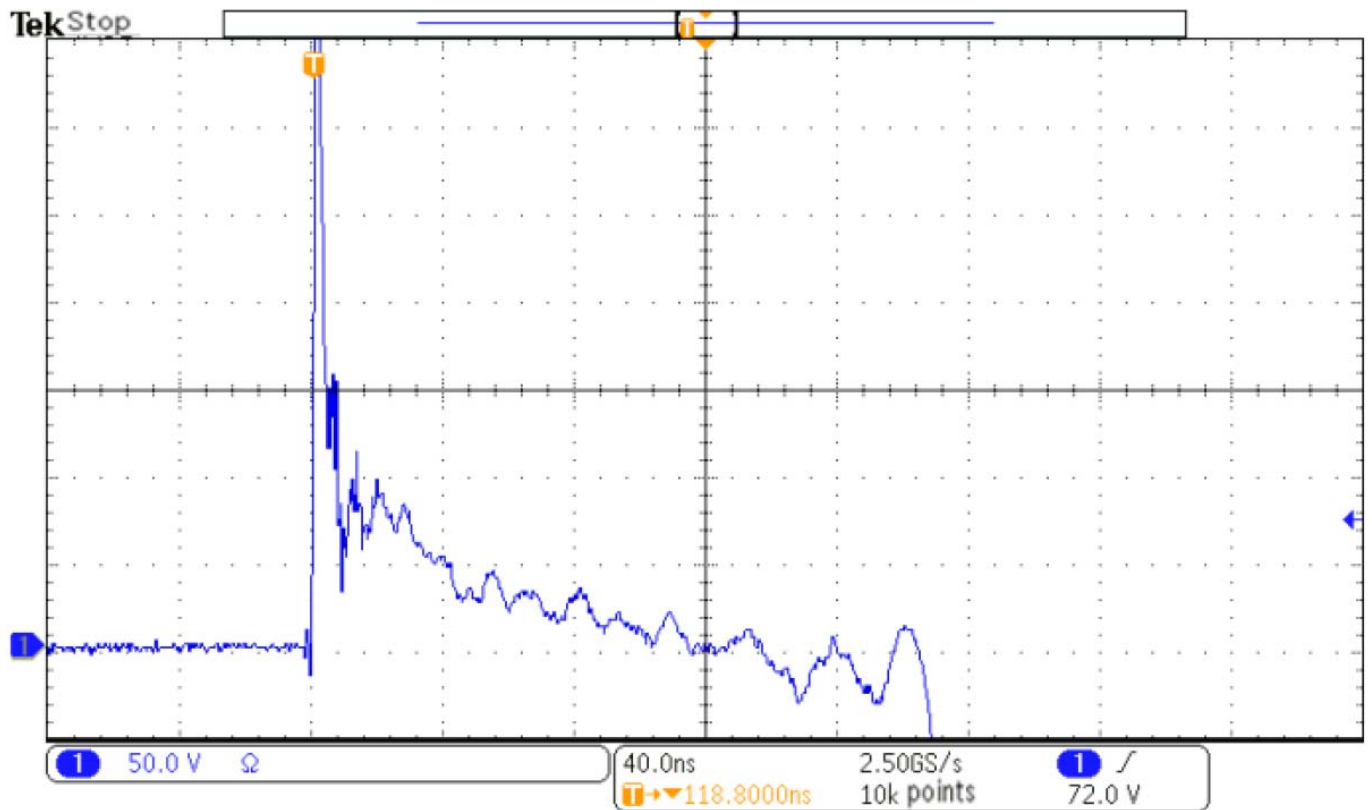


Fig 2 (C) with ESD protection sample

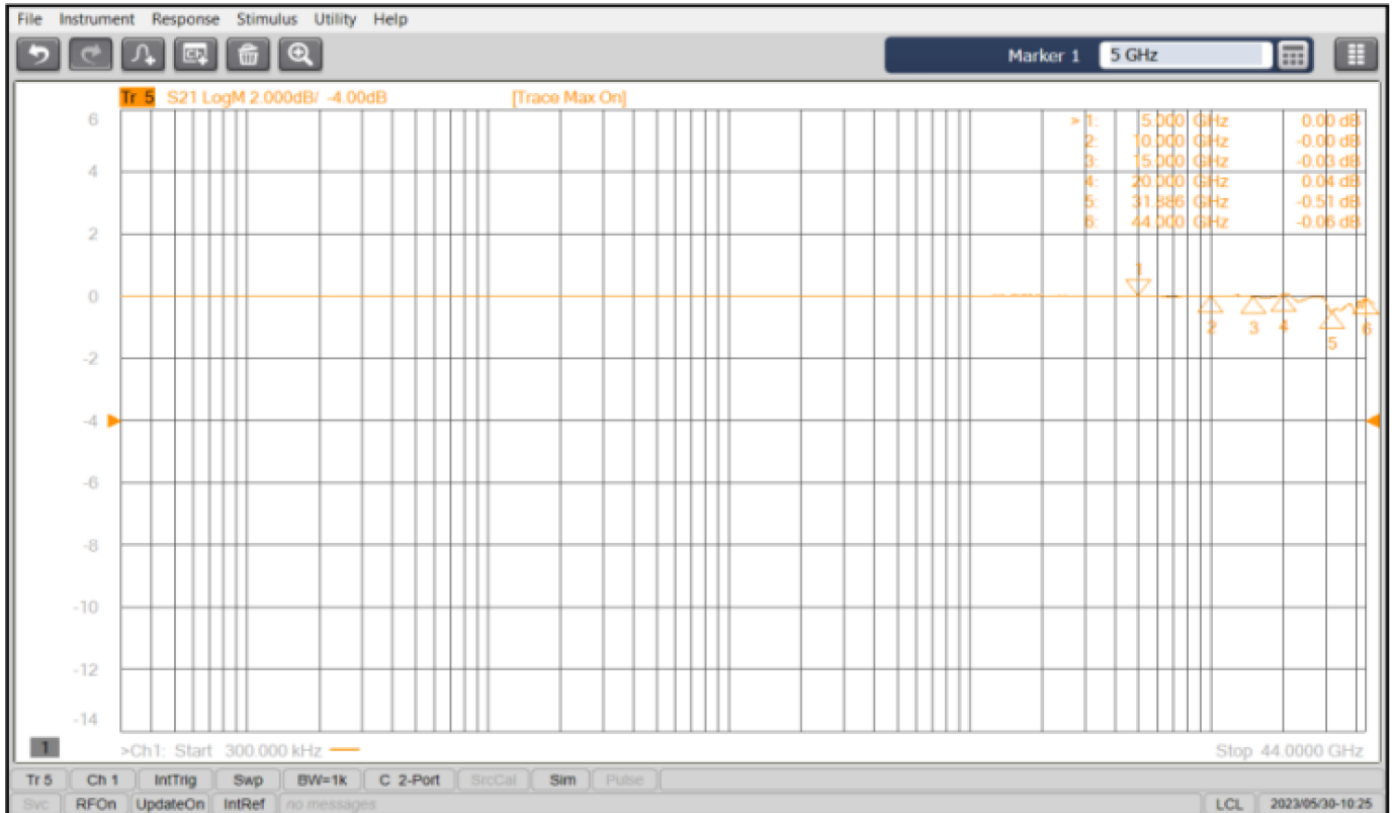


Fig 3(A) Insertion loss


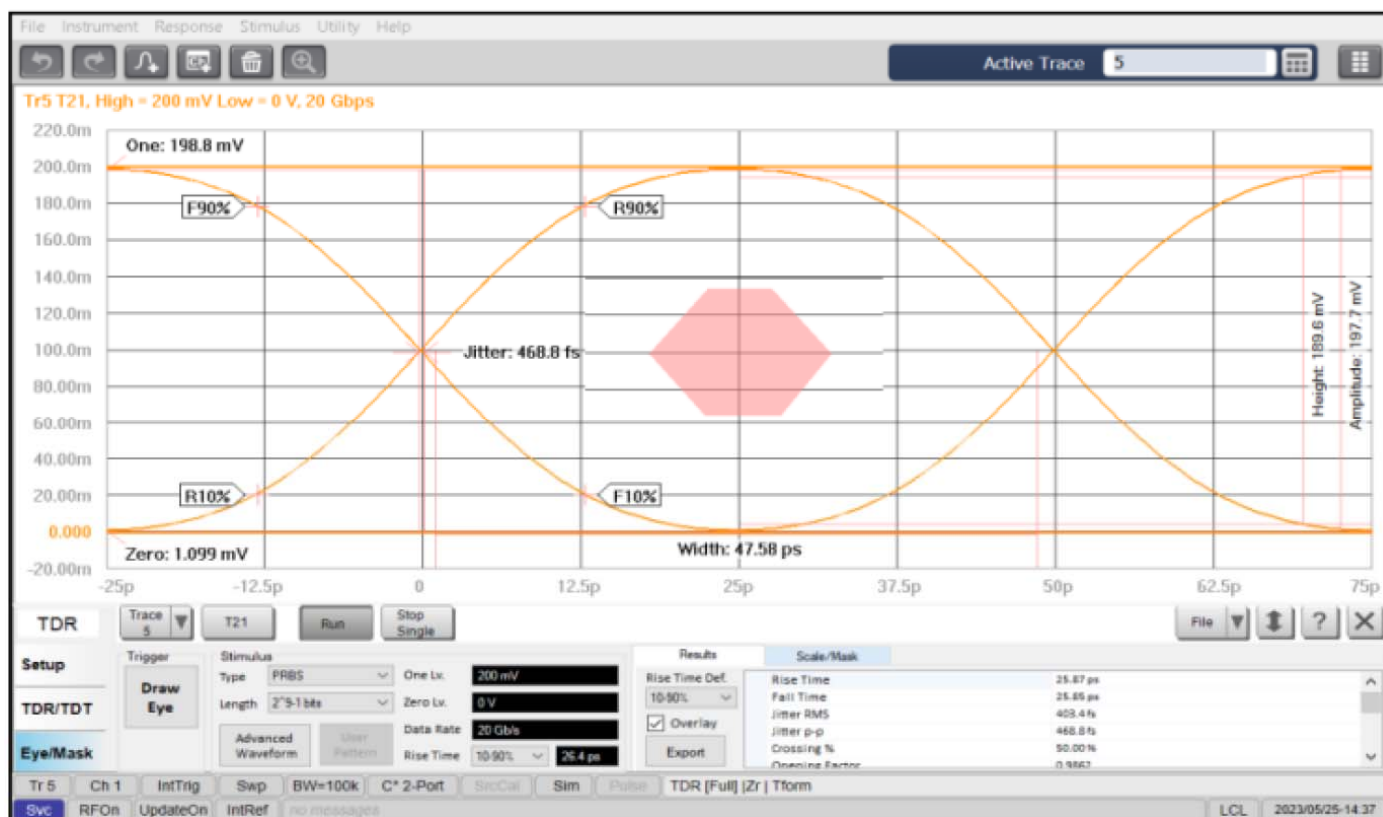


Fig 3(B) Eye pattern

■ Outline Dimensions


Model	SGD0603
Length (L)	0.60±0.05
Width (W)	0.30±0.05
Thickness (T)	0.25±0.05
Termination (a)	0.15±0.05

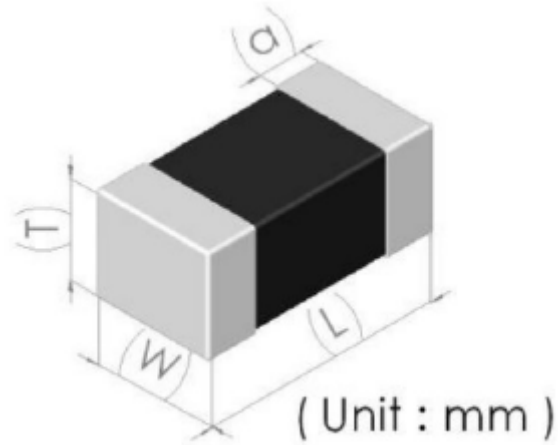

■ Recommend land pattern (Unit:mm)

(Unit:mm)

	A	B	C
0201	0.2~0.3	0.25~0.35	0.3~0.35

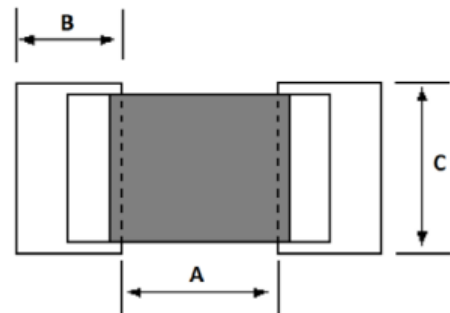

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.