


Surface Mount Zener Diodes



Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Mechanical Data

- **Package:** DO-214AC (SMA)
Molding compound meets UL 94 V-0 flammability rating, -compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MAX
DC power dissipation at T _L = 75 °C	P _D	W	2.0
Maximum instantaneous forward voltage@ I _F =200mA	V _F	V	1.5
Maximum junction temperature	T _j	°C	-55 to +150
Storage temperature range	T _{stg}	°C	-55 to +150

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum DC Zener Current
	Min V _Z ⁽¹⁾ at I _{ZT}	Typ. V _Z ⁽¹⁾ at I _{ZT}	Max V _Z ⁽¹⁾ at I _{ZT}	I _{ZT}	Z _{ZT} at I _{ZT}	Z _{ZK} at I _{ZK}	I _{ZK}	I _R	Test voltage V _R	I _{ZM}
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
SMA2Z3.3A	3.14	3.3	3.47	113.6	10	500	1.00	100.0	1.0	548.0
SMA2Z3.6A	3.42	3.6	3.78	104.2	9	500	1.00	100.0	1.0	502.0
SMA2Z3.9A	3.71	3.9	4.10	96.1	7.5	500	1.00	50.0	1.0	464.0
SMA2Z4.3A	4.09	4.3	4.52	87.2	6.0	500	1.00	50.0	1.0	421.0
SMA2Z4.7A	4.47	4.7	4.94	79.8	5.0	550	1.00	10.0	1.0	385.0
SMA2Z5.1A	4.85	5.1	5.36	73.5	4.0	600	1.00	10.0	1.0	354.0
SMA2Z5.6A	5.32	5.6	5.88	66.9	2.5	500	1.00	10.0	2.0	323.0
SMA2Z6.2A	5.89	6.2	6.51	80.5	1.5	700	1.00	10.0	3.0	292.0
SMA2Z6.8A	6.46	6.8	7.14	73.5	2.0	700	1.00	10.0	4.0	266.0
SMA2Z7.5A	7.13	7.5	7.88	66.5	2.0	700	0.50	10.0	5.0	242.0
SMA2Z8.2A	7.79	8.2	8.61	61.0	2.3	700	0.50	10.0	6.0	220.0
SMA2Z9.1A	8.65	9.1	9.56	55.0	2.5	700	0.50	10.0	7.0	200.0

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum DC Zener Current
	Min $V_Z^{(1)}$ at I_{ZT}	Typ. $V_Z^{(1)}$ at I_{ZT}	Max $V_Z^{(1)}$ at I_{ZT}	I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK} at I_{ZK}	I_{ZK}	I_R	Test voltage V_R	I_{ZM}
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
SMA2Z10A	9.50	10.0	10.50	50.0	3.5	700	0.25	10.0	7.6	182.0
SMA2Z11A	10.45	11.0	11.55	45.5	4.0	700	0.25	1.0	8.4	166.0
SMA2Z12A	11.40	12.0	12.60	41.5	4.5	700	0.25	1.0	9.1	152.0
SMA2Z13A	12.35	13.0	13.65	38.5	5.0	700	0.25	0.5	9.9	138.0
SMA2Z14A	13.30	14.0	14.70	35.7	5.5	700	0.25	0.5	10.6	130.0
SMA2Z15A	14.25	15.0	15.75	33.4	7.0	700	0.25	0.5	11.4	122.0
SMA2Z16A	15.20	16.0	16.80	31.2	8.0	700	0.25	0.5	12.2	114.0
SMA2Z17A	16.15	17.0	17.85	29.4	9.0	750	0.25	0.5	13.0	107.0
SMA2Z18A	17.10	18.0	18.90	27.8	10.0	750	0.25	0.5	13.7	100.0
SMA2Z19A	18.05	19.0	19.95	26.3	11.0	750	0.25	0.5	14.4	95.0
SMA2Z20A	19.00	20.0	21.00	25.0	11.0	750	0.25	0.5	15.2	90.0
SMA2Z22A	20.90	22.0	23.10	22.8	12.0	750	0.25	0.5	16.7	82.0
SMA2Z24A	22.80	24.0	25.20	20.8	13.0	750	0.25	0.5	18.2	76.0
SMA2Z27A	25.65	27.0	28.35	18.5	18.0	750	0.25	0.5	20.6	68.0
SMA2Z30A	28.50	30.0	31.50	16.6	20.0	1000	0.25	0.5	22.5	60.0
SMA2Z33A	31.35	33.0	34.65	15.1	23.0	1000	0.25	0.5	25.1	55.0
SMA2Z36A	34.20	36.0	37.80	13.9	25.0	1000	0.25	0.5	27.4	50.0
SMA2Z39A	37.05	39.0	40.95	12.8	30.0	1000	0.25	0.5	29.7	47.0
SMA2Z43A	40.85	43.0	45.15	11.6	35.0	1500	0.25	0.5	32.7	43.0
SMA2Z47A	44.65	47.0	49.35	10.6	40.0	1500	0.25	0.5	35.8	39.0
SMA2Z51A	48.45	51.0	53.55	9.8	48.0	1500	0.25	0.5	38.8	36.0
SMA2Z56A	53.20	56.0	58.80	9.0	55.0	2000	0.25	0.5	42.6	32.0
SMA2Z62A	58.90	62.0	65.10	8.1	60.0	2000	0.25	0.5	47.1	29.0
SMA2Z68A	64.60	68.0	71.40	7.4	75.0	2000	0.25	0.5	51.7	27.0
SMA2Z75A	71.25	75.0	78.75	6.7	90.0	2000	0.25	0.5	56.0	24.0
SMA2Z82A	77.90	82.0	86.10	6.1	100.0	3000	0.25	0.5	62.2	22.0
SMA2Z91A	86.45	91.0	95.55	5.5	125.0	3000	0.25	0.5	69.2	20.0
SMA2Z100A	95.00	100.0	105.00	5.0	175.0	3000	0.25	0.5	76.0	18.0
SMA2Z110A	104.50	110.0	115.50	4.5	250.0	4000	0.25	0.5	83.6	17.0
SMA2Z120A	114.00	120.0	126.00	4.2	325.0	4500	0.25	0.5	91.2	15.0
SMA2Z130A	123.50	130.0	136.50	3.8	400.0	5000	0.25	0.5	98.8	14.0
SMA2Z140A	133.00	140.0	147.00	3.6	500.0	5500	0.25	0.5	106.4	13.0
SMA2Z150A	142.50	150.0	157.50	3.3	575.0	6000	0.25	0.5	114.0	12.0
SMA2Z160A	152.00	160.0	168.00	3.1	650.0	6500	0.25	0.5	121.6	11.0
SMA2Z170A	161.50	170.0	178.50	2.9	675.0	7000	0.25	0.5	130.4	11.0

Part Number	Nominal Zener voltage			Test current	Maximum dynamic impedance resistance			Maximum reverse leakage current		Maximum DC Zener Current
	Min $V_Z^{(1)}$ at I_{ZT}	Typ. $V_Z^{(1)}$ at I_{ZT}	Max $V_Z^{(1)}$ at I_{ZT}	I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK} at I_{ZK}	I_{ZK}	I_R	Test voltage V_R	I_{ZM}
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
SMA2Z180A	171.00	180.0	189.00	2.8	725.0	7000	0.25	0.5	136.8	10.0
SMA2Z190A	180.50	190.0	199.50	2.6	825.0	8000	0.25	0.5	144.8	10.0
SMA2Z200A	190.00	200.0	210.00	2.5	1900.0	9990	0.25	0.5	152.0	9.0
SMA2Z220A	209.00	220.0	231.00	2.0	2000.0	8500	0.25	0.5	167.0	8.0

Notes:

(1) Nominal Zener voltage Range: 95% Typ. V_Z (1)at I_{ZT} ----105% Typ. V_Z (1)at I_{ZT}

■ Characteristics (Typical)

FIG1: Power Temperature Derating Curve

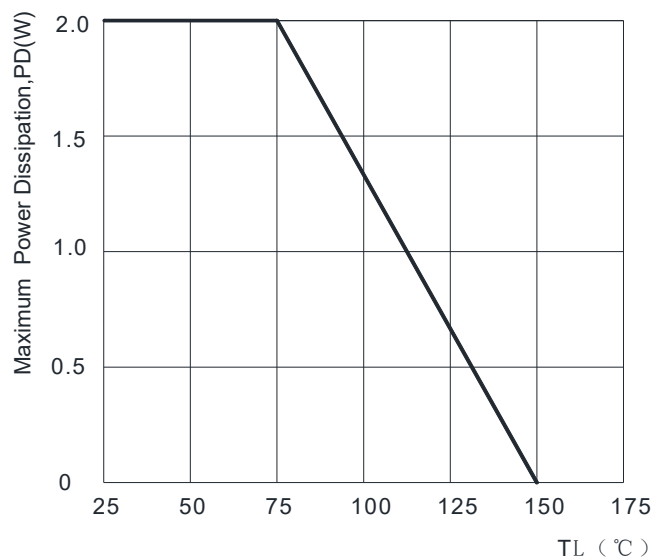


FIG2: Typical Instantaneous Forward Characteristics

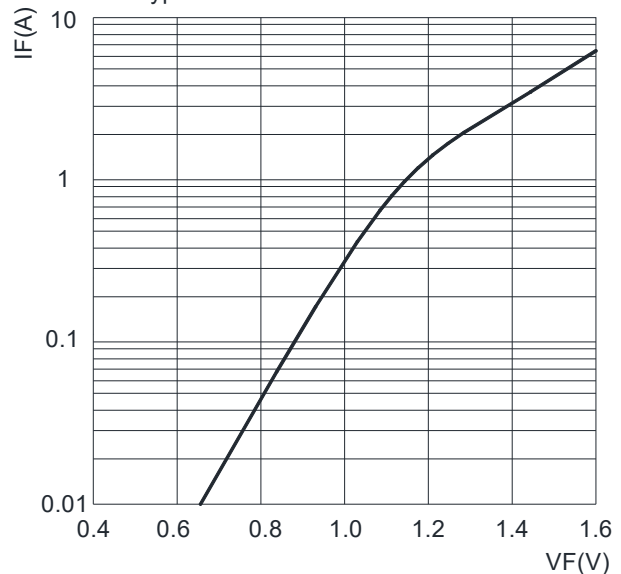


FIG3: Typical Reverse Characteristics


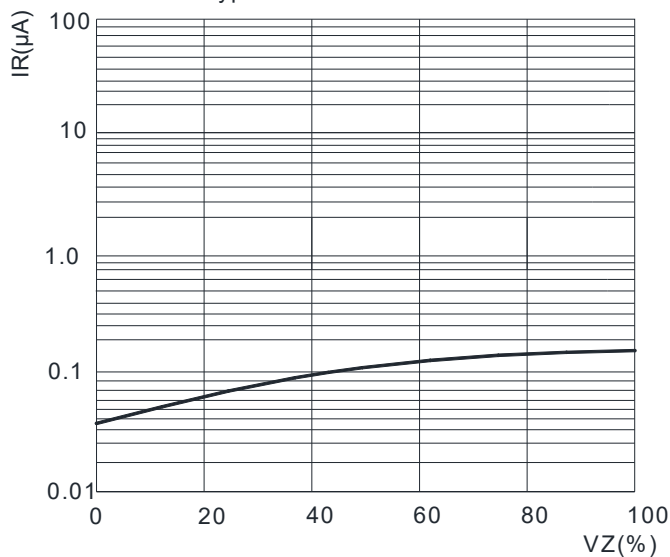



FIG4: Temperature Coefficients v.s. Zener Voltage

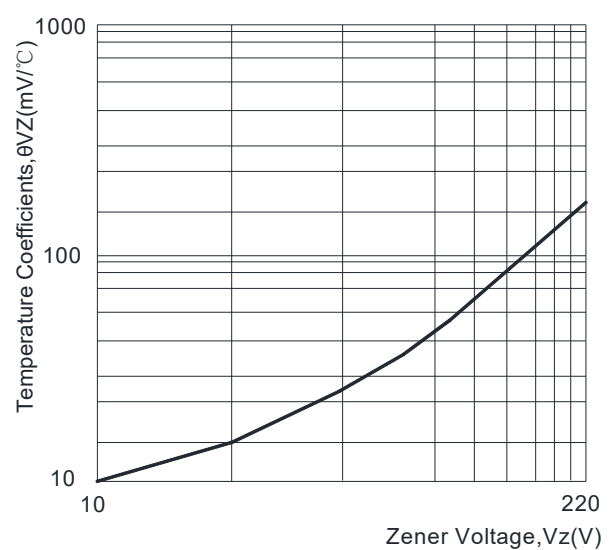

■ Ordering Information (Example)


PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SMA2ZXXA SERIES	F1	Approximate 0.059	5000	10000	80000	13" reel

■ Outline Dimensions

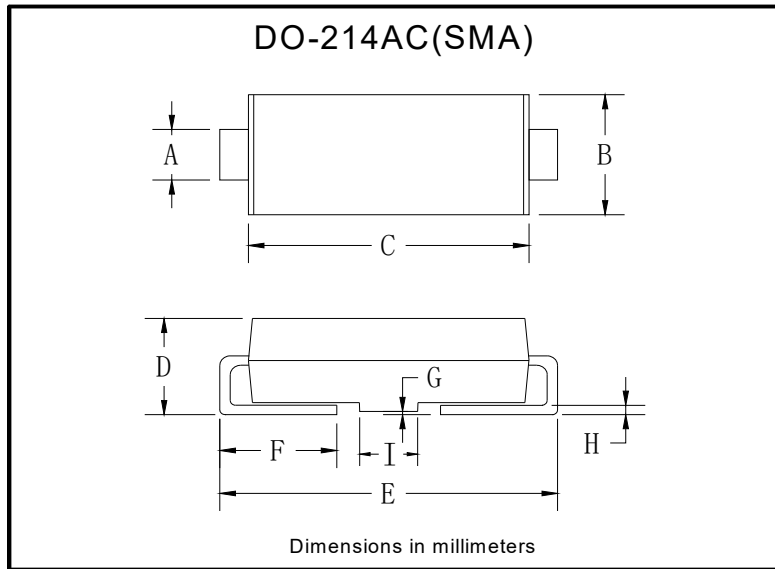

DO-214AC(SMA)		
Dim	Min	Max
A	1.25	1.58
B	2.40	2.83
C	4.00	4.75
D	1.90	2.30
E	4.93	5.28
F	0.76	1.41
G	0.05	0.20
H	0.15	0.31
I	1.70	2.10

■ Suggested Pad Layout

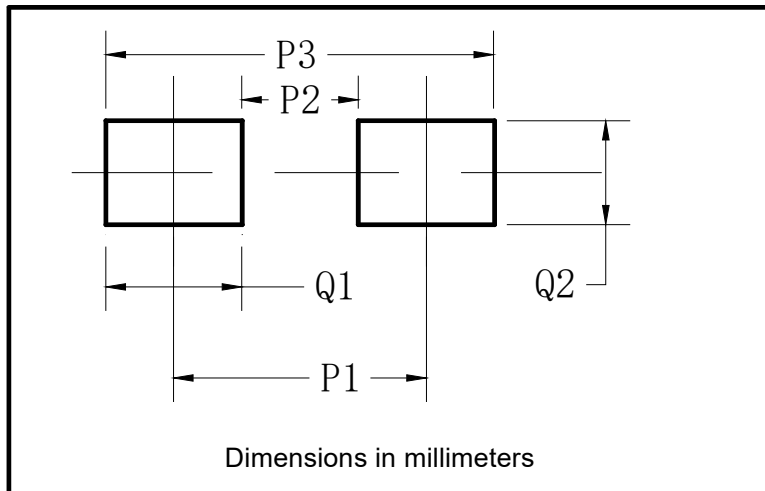

DO-214AC(SMA)	
Dim	Millimeters
P1	4.00
P2	1.50
P3	6.50
Q1	2.50
Q2	1.70

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.