


General Purpose Rectifier Diodes

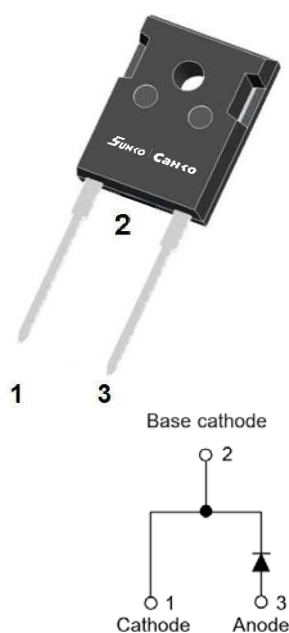

Features

- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Application

- Input rectification

Mechanical Data

- **Package:** TO-247-2L
Molding compound meets UL 94 V-0 flammability rating, -compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	60EPS12	60EPS16	60EPS19
Device marking code			60EPS12	60EPS16	60EPS19
Repetitive Peak Reverse Voltage	VRRM	V	1200	1600	1900
Average Rectified Output Current @60Hz half sine-wave, R-load, T _c (FIG.1)	I _o	A	60		
Surge(Non-repetitive) Forward Current @50Hz half sine-wave, 1 cycle, T _a =25°C	IFSM	A	950		
Current Squared Time @1ms≤t≤10ms T _j =25°C	I ² t	A ² s.	4525		
Storage Temperature	T _{stg}	°C	-55 ~ +150		
Junction Temperature	T _j	°C	-55 ~ +150		

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	60EPS12	60EPS16	60EPS19
Maximum instantaneous forward voltage drop per diode	V _{FM}	V	I _{FM} =30.0A	1.1		
			I _{FM} =60.0A	1.3		
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM1}	uA	V _{RM} =V _{RRM} T _a =25°C	5		
	I _{RRM2}		V _{RM} =V _{RRM} T _a =125°C	500		
	I _{RRM2}		V _{RM} =V _{RRM} T _a =150°C	1000		

■ Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	60EPS12	60EPS16	60EPS19
Typical Thermal Resistance	Between junction and ambient	R _{θJA}	°C/W	40		
	Between junction and case	R _{θJC}		0.35		

■ Ordering Information (Example)

PREFERRED P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
60EPS12 THRU 60EPS19	Approximate 6.0	30	360	1800	Tube

■ Characteristics (Typical)

FIG.1: I_o-T_C Curve

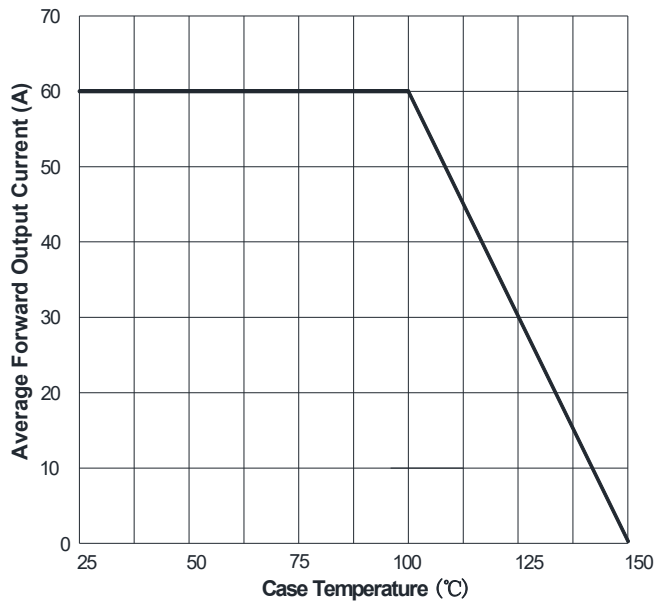


FIG2: Surge Forward Current Capability

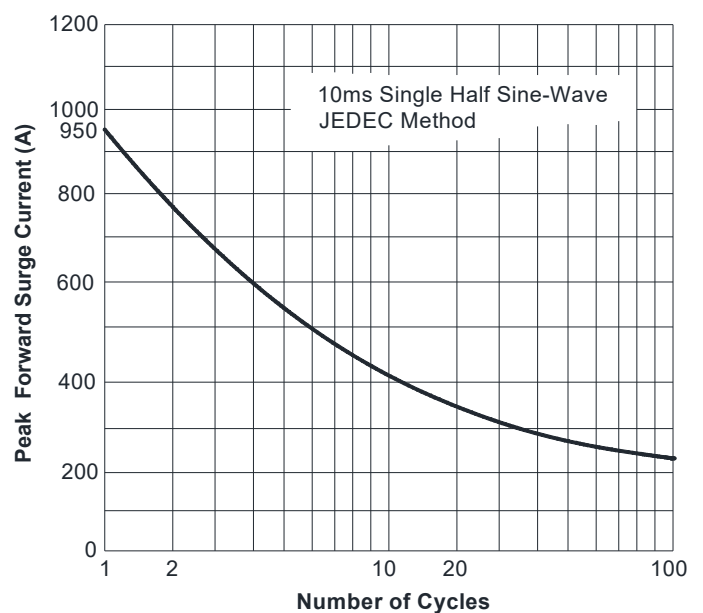


FIG3: Typical Forward Voltage



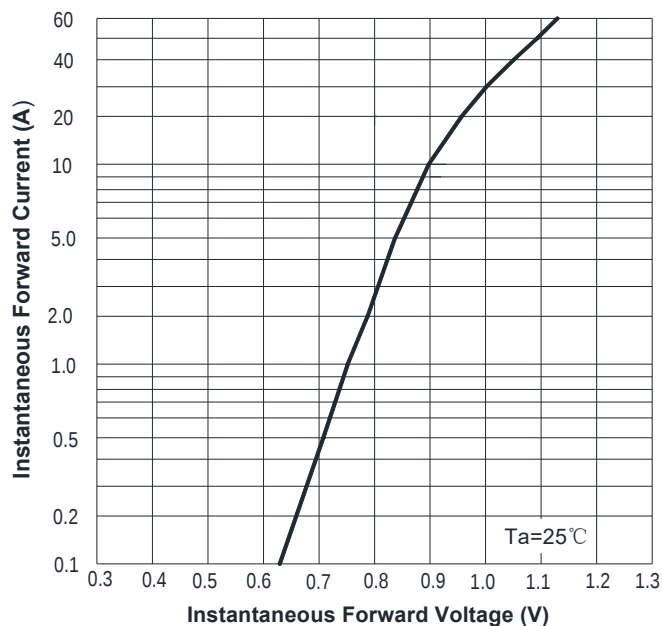


FIG.4: Typical Reverse Characteristics

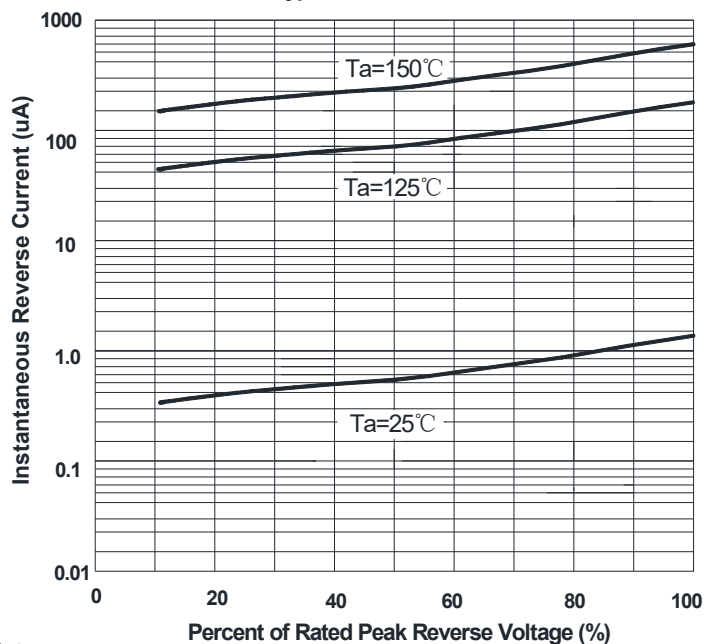

■ Outline Dimensions

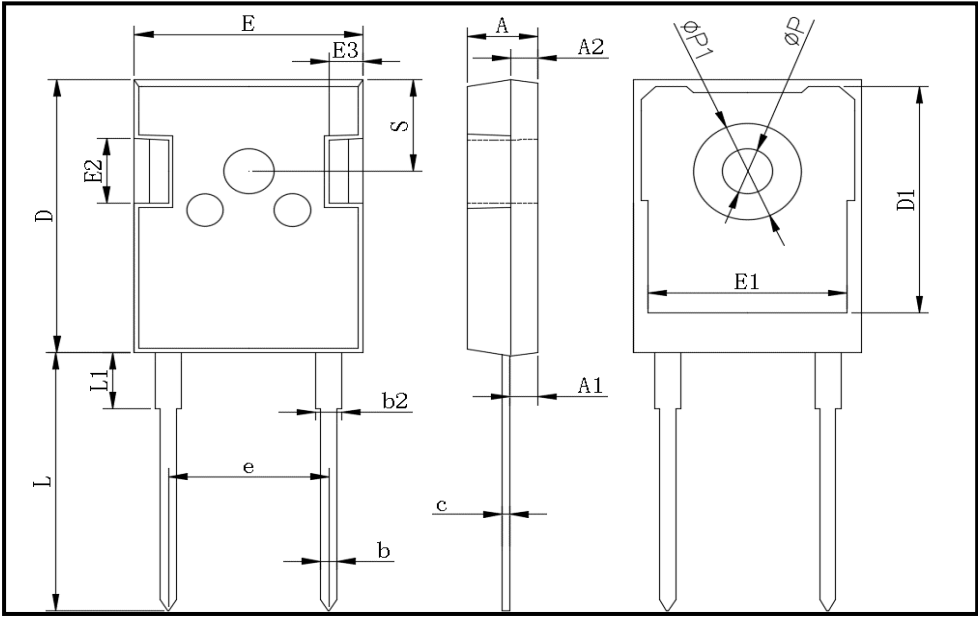

TO-247-2L		
Dim	Min	Max
A	4.80	5.20
A1	2.21	2.61
A2	1.85	2.15
b	1.00	1.40
b2	1.91	2.21
c	0.50	0.70
D	20.70	21.30
D1	16.25	16.85
E	15.50	16.10
E1	13.00	13.60
E2	4.80	5.20
E3	2.30	2.70
e	10.88 TYP	
L	19.62	20.22
L1	-	4.30
ϕP	3.40	3.80
$\phi P1$	-	7.30
S	6.15 TYP	

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.