

## Surface Mount High Efficient Rectifier




### Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Fast switching for high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

### Typical Applications

For use in high efficient switching rectification of power supply, inverters, converters, and freewheeling diodes for consumer and telecommunication.



### Mechanical Data

- **Package:** SOD-123FL  
Molding compound meets UL 94 V-0 flammability rating, -compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

### ■Maximum Ratings (Ta=25°C Unless otherwise specified)

| PARAMETER                                                                        | SYMBOL | UNIT | H07A      | H07B | H07D | H07G | H07J | H07K | H07M |
|----------------------------------------------------------------------------------|--------|------|-----------|------|------|------|------|------|------|
| Device marking code                                                              |        |      | H07A      | H07B | H07D | H07G | H07J | H07K | H07M |
| Repetitive peak reverse voltage                                                  | VRRM   | V    | 50        | 100  | 200  | 400  | 600  | 800  | 1000 |
| Average rectified output current<br>@60Hz sine wave, Resistance load, Ta (FIG.1) | IO     | A    | 0.7       |      |      |      |      |      |      |
| Surge(non-repetitive)forward current<br>@60Hz half-sine wave,1 cycle, Tj=25°C    | IFSM   | A    | 25        |      |      |      |      |      |      |
| Storage temperature                                                              | Tstg   | °C   | -55 ~+150 |      |      |      |      |      |      |
| Junction temperature                                                             | Tj     | °C   | -55 ~+150 |      |      |      |      |      |      |

### ■Electrical Characteristics (Ta=25°C Unless otherwise specified)

| PARAMETER                                                         | SYMBOL           | UNIT | TEST CONDITIONS                                                   | H07A | H07B | H07D | H07G | H07J | H07K | H07M |
|-------------------------------------------------------------------|------------------|------|-------------------------------------------------------------------|------|------|------|------|------|------|------|
| Maximum instantaneous forward voltage drop per diode              | V <sub>F</sub>   | V    | I <sub>FM</sub> =1.0A                                             | 1.0  |      |      | 1.3  | 1.7  |      |      |
| Maximum reverse recovery time                                     | t <sub>rr</sub>  | ns   | I <sub>F</sub> =0.5A,I <sub>R</sub> =1.0A, I <sub>RR</sub> =0.25A | 50   |      |      |      | 75   |      |      |
| Maximum DC reverse current at rated DC blocking voltage per diode | I <sub>RRM</sub> | μA   | T <sub>a</sub> =25℃                                               | 5    |      |      |      |      |      |      |
|                                                                   |                  |      | T <sub>a</sub> =125℃                                              | 100  |      |      |      |      |      |      |

# H07A THRU H07M

## ■ Thermal Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

| PARAMETER          | SYMBOL            | UNIT | H07A             | H07B | H07D | H07G | H07J | H07K | H07M |
|--------------------|-------------------|------|------------------|------|------|------|------|------|------|
| Thermal resistance | R <sub>θJ-A</sub> | °C/W | 70 <sup>1)</sup> |      |      |      |      |      |      |
|                    | R <sub>θJ-L</sub> |      | 20 <sup>1)</sup> |      |      |      |      |      |      |

Note:

(1) Thermal resistance between junction and ambient and between junction and lead mounted on P.C.B with 3mm\*3mm copper pad areas.

## ■ Characteristics (Typical)

FIG1: I<sub>o</sub>-T<sub>L</sub> Curve

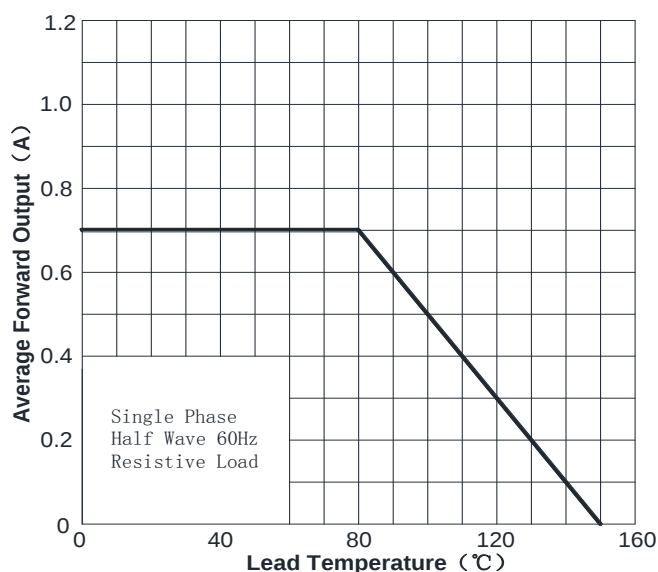


FIG2: Surge Forward Current Capability

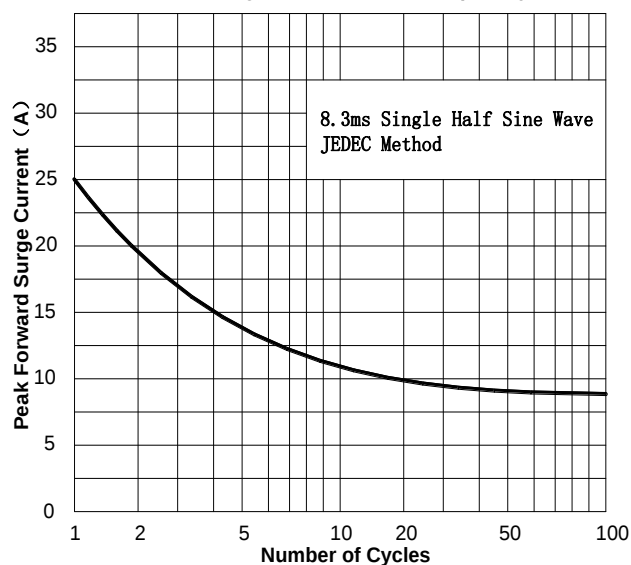


FIG3: Forward Voltage



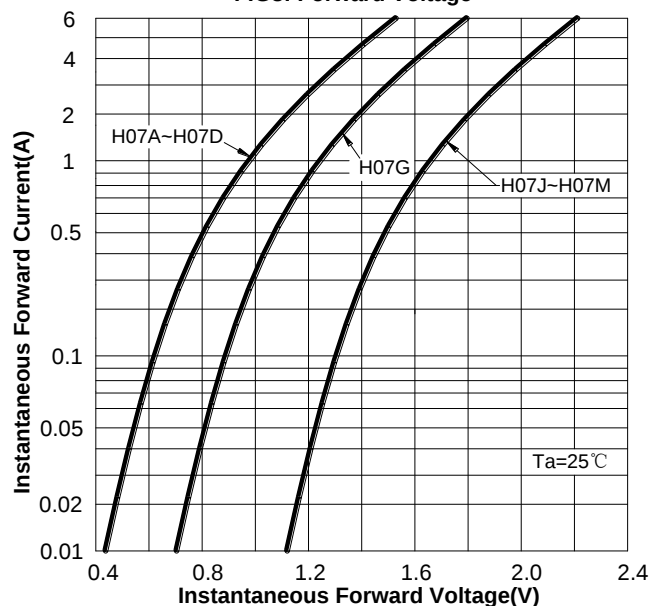


FIG4: Typical Reverse Characteristics

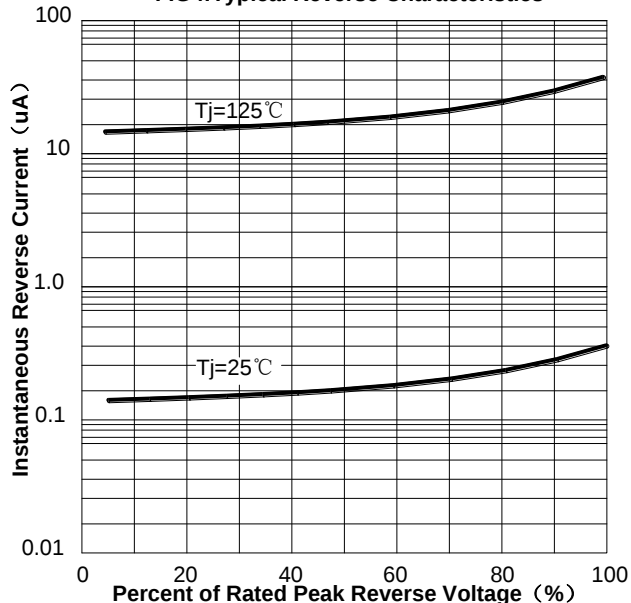

## H07A THRU H07M


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

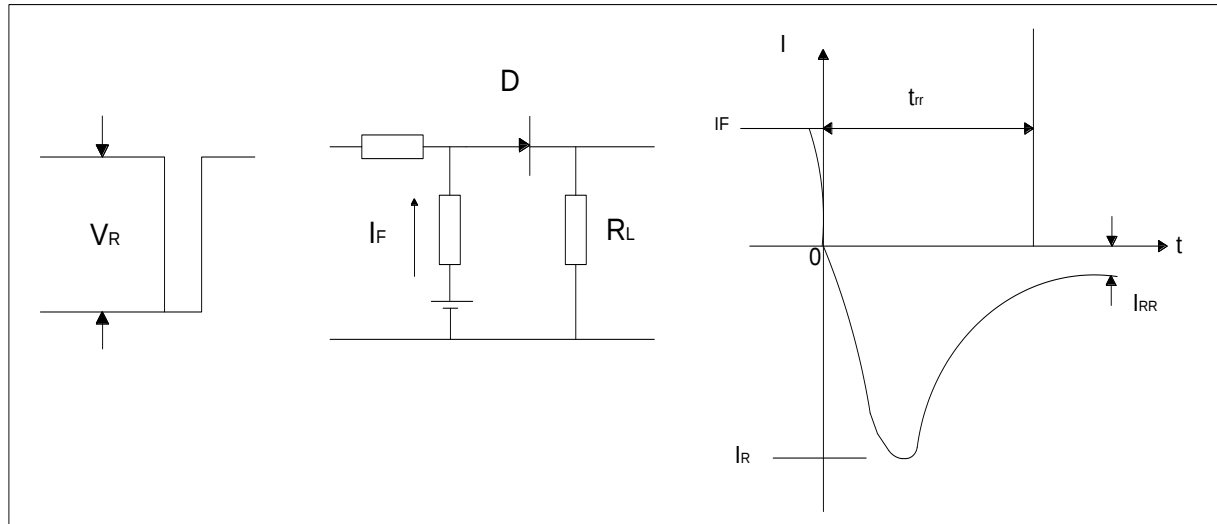

### ■ Ordering Information (Example)


| PREFERED P/N   | PACKING CODE | UNIT WEIGHT(g)     | MINIMUM PACKAGE(pcs) | INNER BOX QUANTITY(pcs) | OUTER CARTON QUANTITY(pcs) | DELIVERY MODE |
|----------------|--------------|--------------------|----------------------|-------------------------|----------------------------|---------------|
| H07A THRU H07M | F1           | Approximate 0.0169 | 3000                 | 15000                   | 120000                     | 7" reel       |
| H07A THRU H07M | F2           | Approximate 0.0169 | 2500                 | 12500                   | 100000                     | 7" reel       |
| H07A THRU H07M | F3           | Approximate 0.0169 | 10000                | 30000                   | 210000                     | 13" reel      |
| H07A THRU H07M | F4           | Approximate 0.0169 | 3000                 | 27000                   | 108000                     | 7" reel       |
| H07A THRU H07M | F5           | Approximate 0.0169 | 10000                | 20000                   | 160000                     | 13" reel      |
| H07A THRU H07M | F6           | Approximate 0.0169 | 3000                 | 12000                   | 60000                      | 7" reel       |

### ■ Outline Dimensions

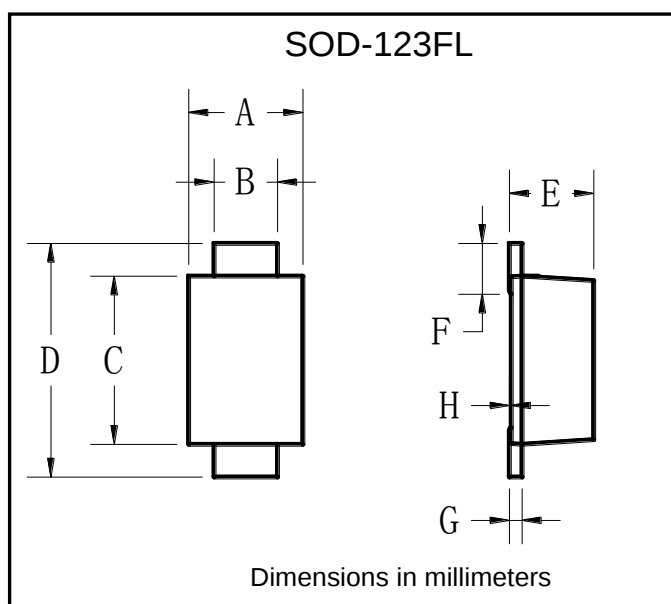

| SOD-123FL |      |      |
|-----------|------|------|
| Dim       | Min  | Max  |
| A         | 1.60 | 1.90 |
| B         | 0.90 | 1.10 |
| C         | 2.55 | 2.85 |
| D         | 3.60 | 3.90 |
| E         | 1.00 | 1.20 |
| F         | 0.40 | 0.90 |
| G         | 0.10 | 0.25 |
| H         | 0.02 | 0.05 |

■ Suggested pad layout

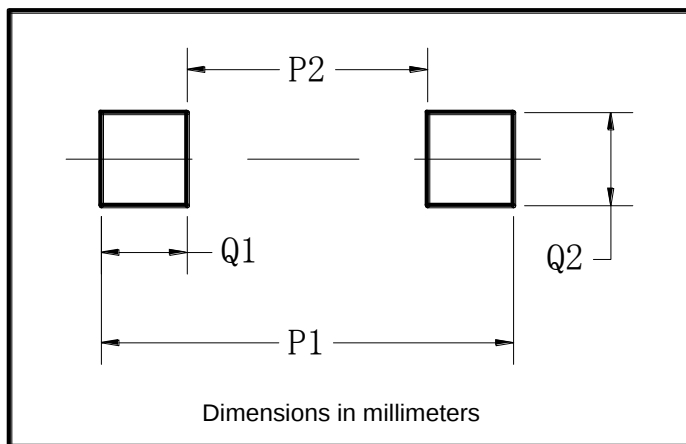

| SOD-123FL |             |
|-----------|-------------|
| Dim       | Millimeters |
| P1        | 3.90        |
| P2        | 1.90        |
| Q1        | 1.00        |
| Q2        | 1.50        |

### Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.co](http://www.russiansunco.co) or consult your nearest Russiansunco's sales office for further assistance.