


Ultra-Fast Recovery Rectifier Diodes

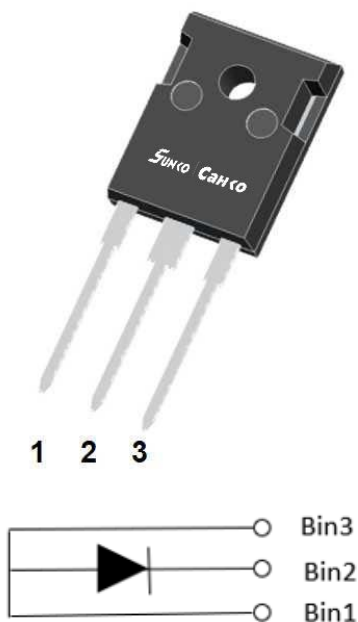

Features

- High frequency operation
- High surge forward current capability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- 2000V Insulating capability
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-247AB
Inner-Insulated Instructure
Molding compound meets UL 94 V-0 flammability rating, -
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings ($T_j=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	MURI6060PGTL
Device marking code			MURI6060PGTL
Repetitive Peak Reverse Voltage	V_{RRM}	V	600
Average Rectified Output Current @60Hz half sine-wave, R-load, T_c (FIG.1)	I_o	A	60
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, $T_j=25^{\circ}\text{C}$	I_{FSM}	A	290
Current Squared Time @1ms≤t≤8.3ms $T_j=25^{\circ}\text{C}$	I^2t	A ² s.	350
Storage Temperature	T_{stg}	°C	-55 ~ +175
Junction Temperature	T_j	°C	-55 ~ +175
Typical Junction capacitance @4V,1MHz	C_j	pF	185

MURI6060PGTL

■Electrical Characteristics (Tj=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Instantaneous forward voltage drop per diode	V_{FM}	V	$I_{FM}=60.0A$ $T_j=25^{\circ}C$	-	2.0	2.5
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	μA	$V_{RM}=V_{RRM}$ $T_j=25^{\circ}C$	-	-	5.0
	I_{RRM2}		$V_{RM}=V_{RRM}$ $T_j=125^{\circ}C$	-	-	200
Reverse Recovery Time	T_{rr}	ns	$I_F=0.5A$ $I_{RM}=1A$ $I_{RR}=0.25A$ $T_j=25^{\circ}C$	-	35	50
			$T_j=25^{\circ}C$	-	30	-
			$T_j=125^{\circ}C$	-	88	-
Peak recovery current	I_{RRM}	A	$T_j=25^{\circ}C$	-	3.5	-
			$T_j=125^{\circ}C$	-	6	-
Reverse recovery charge	Q_{rr}	nC	$T_j=25^{\circ}C$	-	65	-
			$T_j=125^{\circ}C$	-	270	-

■Thermal Characteristics (Tj=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	MURI6060PGTL
Thermal Resistance	Between junction and case	$R_{\theta J-C}$	$^{\circ}C/W$	0.8
	Between junction and Air	$R_{\theta J-A}$	$^{\circ}C/W$	40

■Ordering Information (Example)

PREFERRED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MURI6060PGTL	Approximate 6.0	30	360	1800	Tube

■Characteristics (Typical)

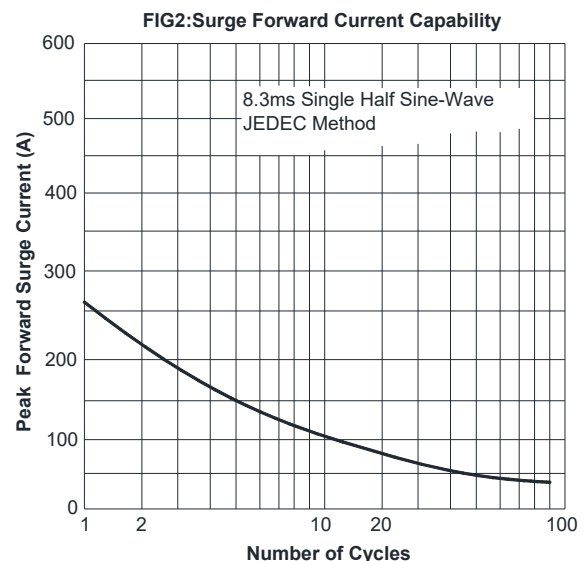
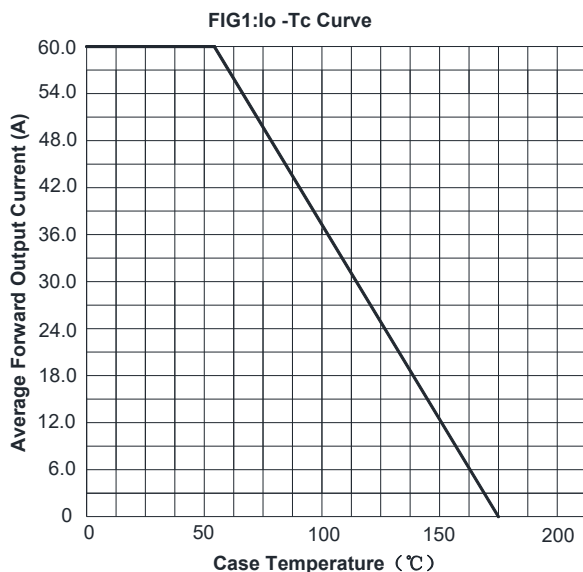


FIG3: Forward Voltage

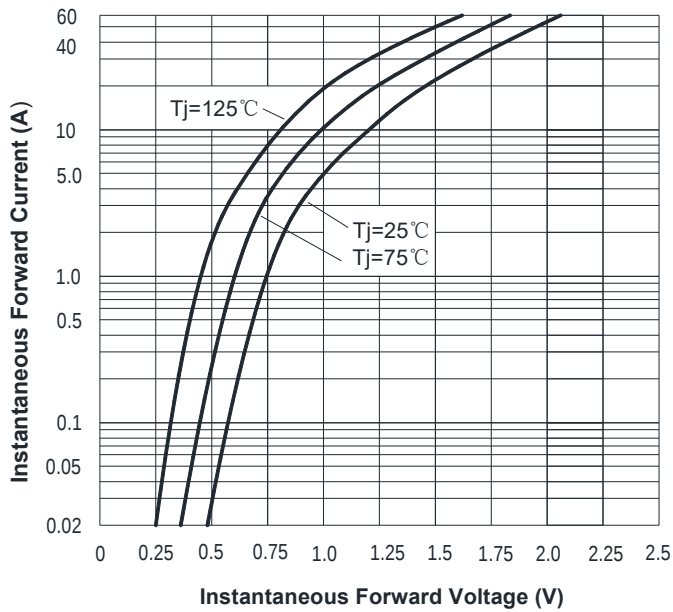


FIG4: Typical Reverse Characteristics



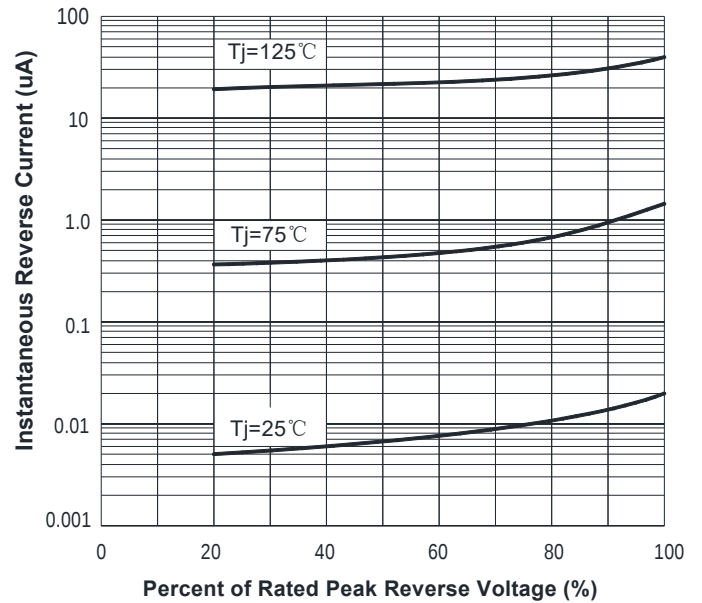


FIG.5 Diagram of circuit and Testing wave form of reverse recovery time

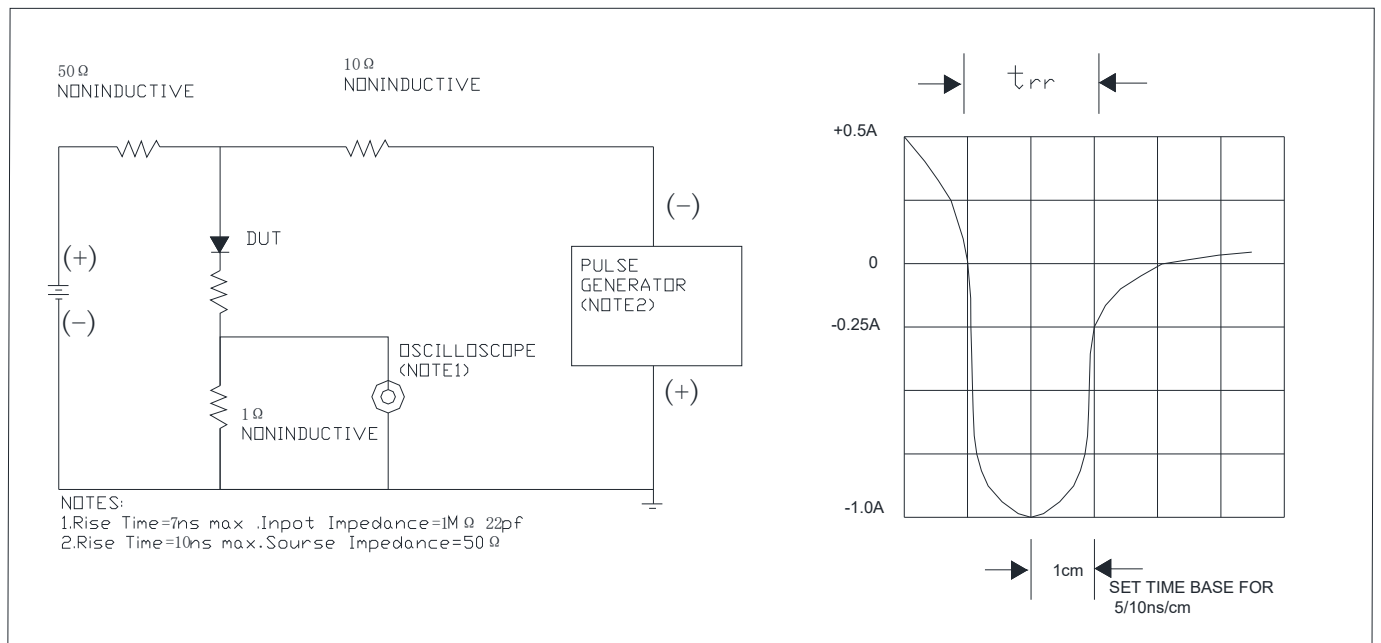

■ Outline Dimensions

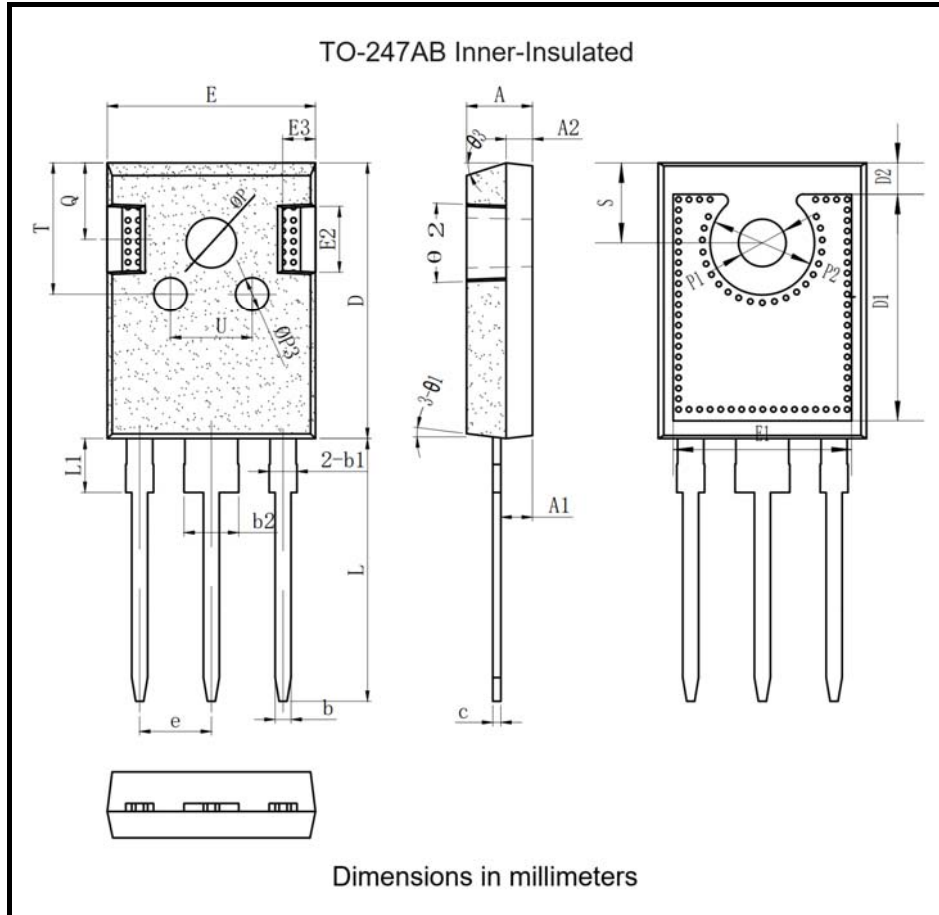

TO-247AB		
Dim	Min	Max
A	4.90	5.10
A1	2.31	2.51
A2	1.90	2.10
b	1.15	1.25
b1	1.95	2.25
b2	2.95	3.25
C	0.55	0.65
D	20.90	21.30
D1	17.10	17.50
D2	2.25	2.55
E	15.70	15.90
E1	13.38	13.68
E2	4.90	5.10
E3	2.40	2.60
e	5.40	5.48
L	19.80	20.15
L1	-	4.30
ΦP	3.60	3.80
ΦP1	3.45	3.65
ΦP2	7.75	8.05
ΦP3	2.40	2.60
Q	5.60	6.00
S	6.05	6.25
T	9.80	10.20
U	6.00	6.40
θ1	7°BSC	
θ2	3°BSC	
θ3	15°BSC	

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.