



2SC3356

NPN General Purpose Amplifier



SOT-23

Features

- Moisture sensitivity level 1
- Halogen free and
- Surface mount package ideally suited for automatic insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Device marking code				R25
Collector-base voltage	V_{CB0}	V	$I_C=100\mu\text{A}, I_E=0$	20
Collector-emitter voltage	V_{CE0}	V	$I_C=1\text{mA}, I_B=0$	12
Emitter-base voltage	V_{EB0}	V	$I_E=100\mu\text{A}, I_C=0$	3
Collector current	I_C	A		0.1
Power dissipation	P_D	mW		200
Junction temperature	T_J	$^{\circ}\text{C}$		-55 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$		-55 to +150

2SC3356

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V _{(BR)CBO}	V	I _C =100μA, I _E =0	20		
Collector-emitter breakdown voltage	V _{(BR)CEO}	V	I _C = 1mA, I _B =0	12		
Emitter-base breakdown voltage	V _{(BR)EBO}	V	I _E =100μA, I _C =0	3		
Collector-base cut-off current	I _{CBO}	uA	V _{CB} =10V			1
Emitter-base cut-off current	I _{EBO}	uA	V _{EB} =1V			1
DC current gain	h _{FE}		V _{CE} =10V, I _C =20mA	125		250
Collector-emitter saturation voltage	V _{CE(sat)}	V	I _C =50mA, I _B =5mA			0.3
Base-emitter saturation voltage	V _{BE(sat)}	V	I _C =50mA, I _B =5mA			1.15
Transition frequency	f _T	GHz	V _{CE} =10V, I _C =20mA		7	
Collector-base output capacitance	Cob	pF	V _{CB} =10V, I _E =0A, f=1MHz			1

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	RθJ-A ⁽¹⁾	°C/W	625
Thermal resistance, junction-to-case	RθJ-C ⁽¹⁾	°C/W	500

Note:

(1) Device mounted on PCB, single-sided copper, with standard footprint

■ Characteristics

Fig 1: Static Characteristics

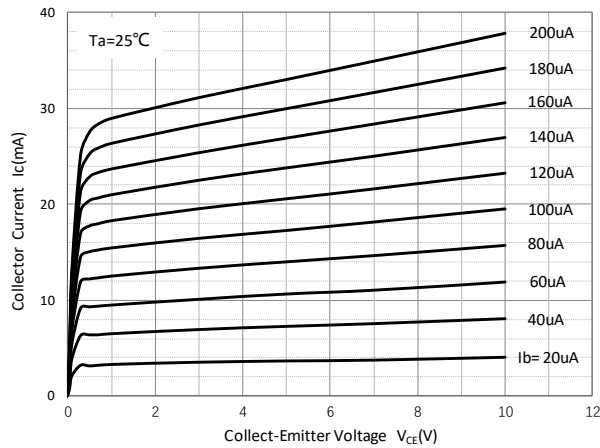


Fig 2: DC Current Gain

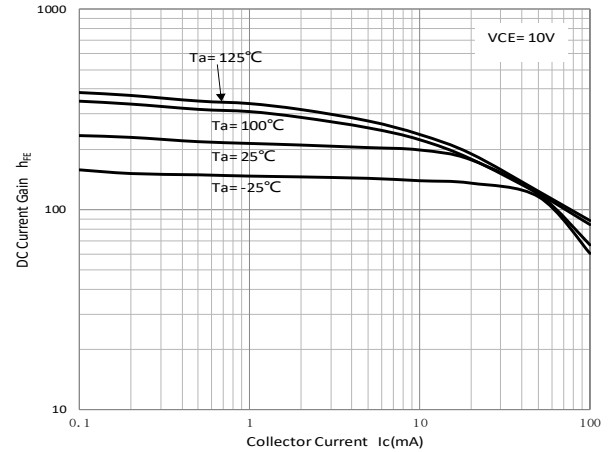


Fig 3: Collector-Emitter Saturation Voltage

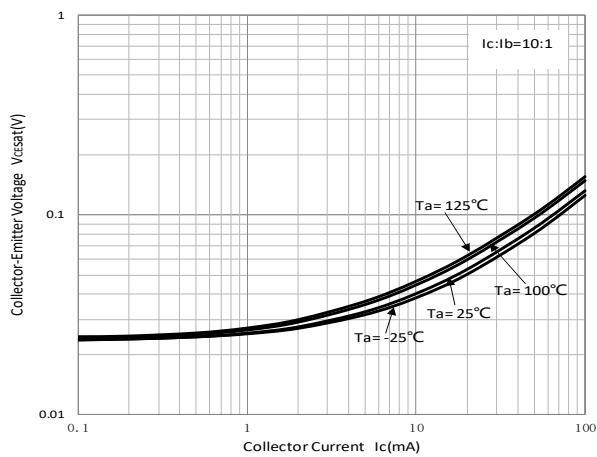


Fig 4: Base-Emitter Saturation Voltage

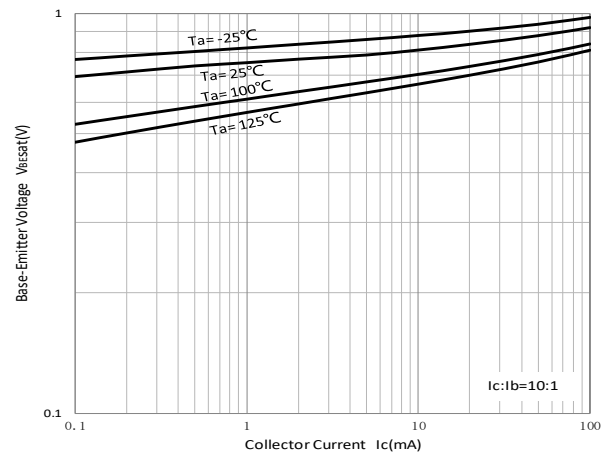


Fig 5: Base-Emitter On Voltage


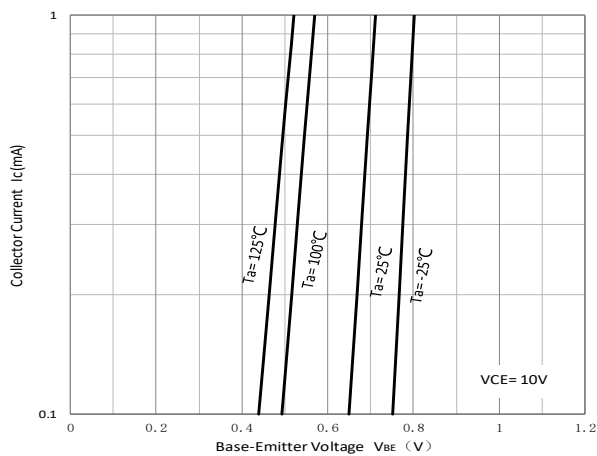


Fig 6: P_D - T_a Curve

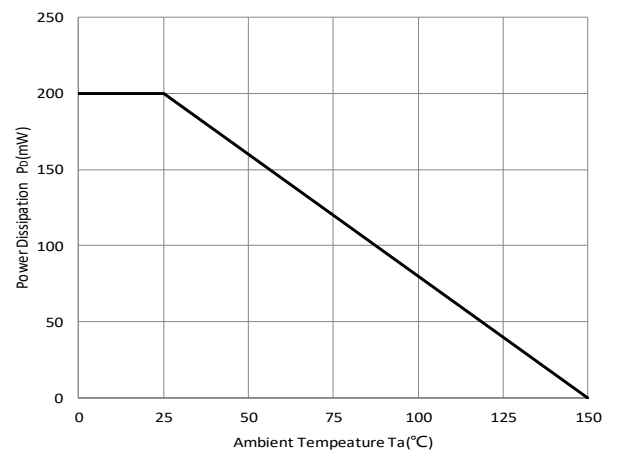


2SC3356

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
2SC3356	F2	Approximate 0.008	3000	30000	120000	7" reel
2SC3356	F4	Approximate 0.008	10000	/	210000	13" reel

■ Outline Dimensions

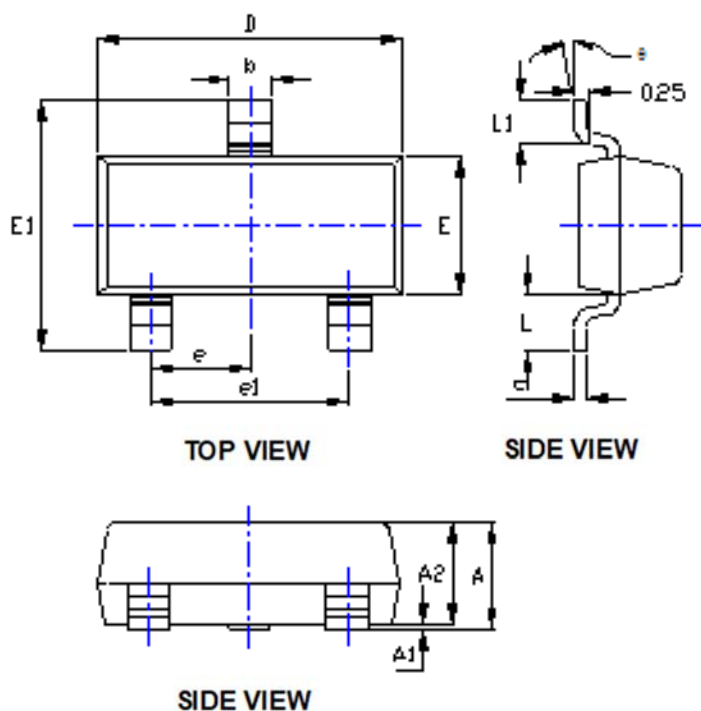

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

■ Suggested Pad Layout

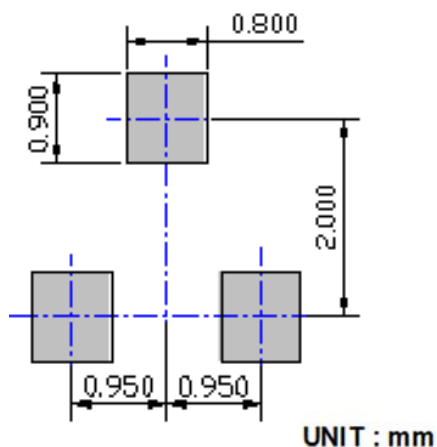

2SC3356

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.