


BAV19W THRU BAV21W

Small-Signal Switching Diodes



Features

- Moisture sensitivity level 1
- Reverse voltage: 100V/150V/200V
- Average forward current : 0.2A

Application

- High frequency rectifier
- Signal switching

Mechanical data

- **Package:** SOD-123
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Parameter	Symbol	Unit	Value	
Device marking code			BAV19W	A8
			BAV20W	T2
			BAV21W	T3
Repetitive peak reverse voltage	V_{RRM}	V	BAV19W	120
			BAV20W	200
			BAV21W	250
Forward current	I_F	A	0.2	
Non-repetitive surge peak forward current @ t=8.3ms half-sine wave	I_{FSM}	A	2	
Non-repetitive surge peak forward current @ t=1ms square wave			2.5	
Non-repetitive surge peak forward current @ t=1s square wave			1	
Power dissipation	P_D	mW	400	

BAV19W THRU BAV21W

Parameter	Symbol	Unit	Value
Junction temperature	T_J	$^{\circ}\text{C}$	-65 to +150
Storage temperature	T_{STG}	$^{\circ}\text{C}$	-65 to +150

■ Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Parameter	Symbol	Unit	Conditions	Min	Typ	Max
Breakdown voltage	V_R	V	BAV19W $I_R=10\mu\text{A}$	100		
			BAV20W $I_R=10\mu\text{A}$	150		
			BAV21W $I_R=10\mu\text{A}$	200		
Forward voltage	V_F	V	$I_F=100\text{mA}$			1.0
			$I_F=200\text{mA}$			1.25
Reverse leakage current	I_R	nA	BAV19W $V_R=100\text{V}$			100
			BAV20W $V_R=150\text{V}$			100
			BAV21W $V_R=200\text{V}$			100
Junction capacitance	C_j	pF	$V_R=0\text{V}$, $f=1\text{MHz}$			5
Reverse recovery time	T_{rr}	ns	$I_F=I_R=30\text{mA}$, $R_L=100\Omega$, $I_{\text{RR}}=3\text{mA}$			50

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta\text{J-A}}^{(1)}$	$^{\circ}\text{C/W}$	315
Thermal resistance, junction-to-case	$R_{\theta\text{J-C}}^{(1)}$	$^{\circ}\text{C/W}$	250

Note:

(1) Thermal resistance from junction to ambient and from junction to case mounted on P.C.B. with 8mm*9mm copper pad areas

BAV19W THRU BAV21W

■ Characteristics

Fig 1: P_D - T_a Curve

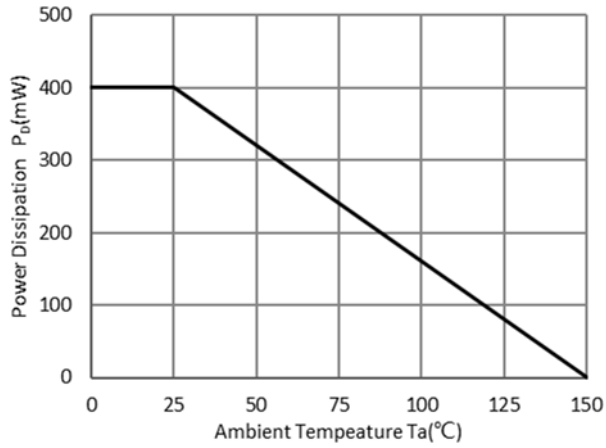


Fig 2: Capacitance Capability

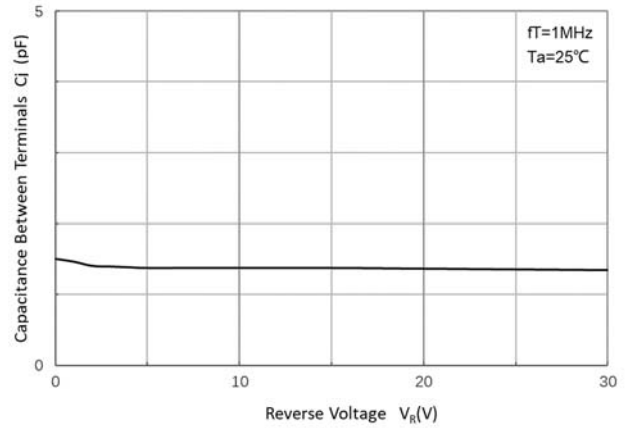


Fig 3: Typical Forward Characteristics


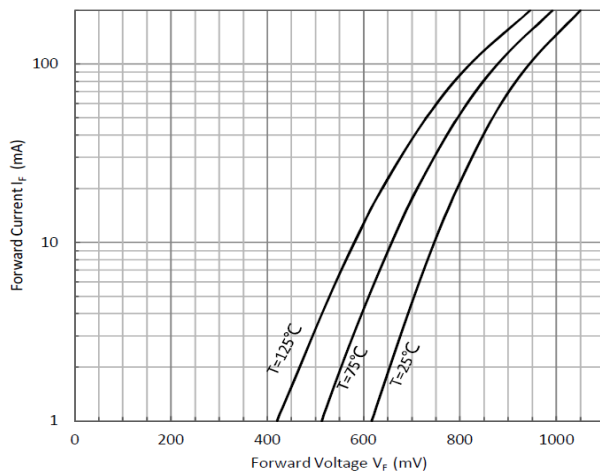


Fig 4: Typical Reverse Characteristics

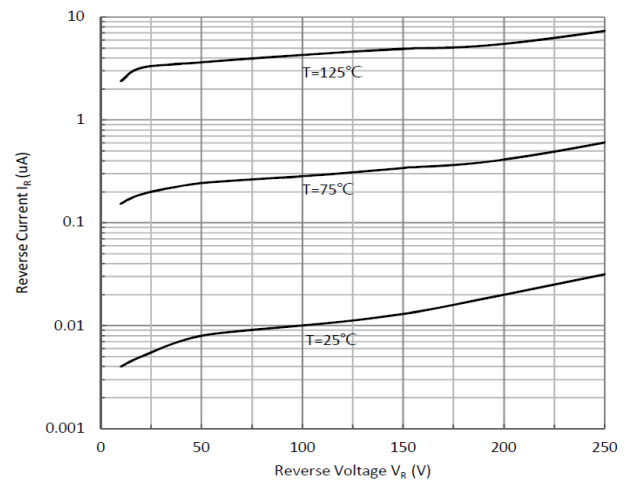


BAV19W THRU BAV21W

■ Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
BAV19W THRU BAV21W	F2	Approximate 0.011	3000	30000	120000	7" reel
BAV19W THRU BAV21W	F3	Approximate 0.011	10000	/	210000	13" reel

■ Outline Dimensions

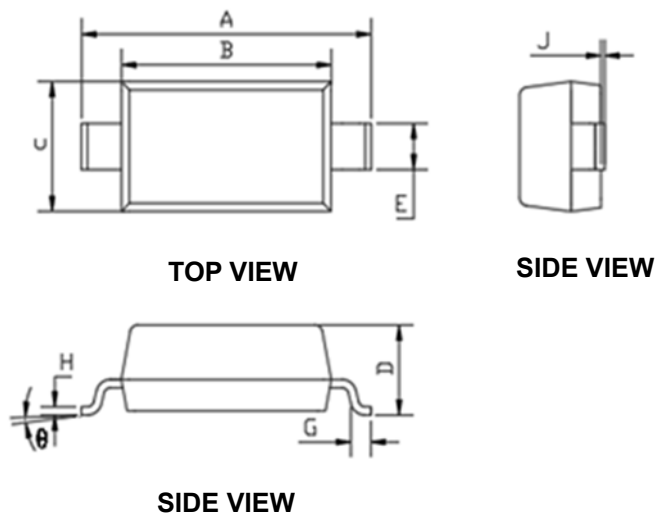

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MM	MAX
A	0.140	0.152	3.550	3.850
B	0.100	0.112	2.550	2.850
C	0.055	0.071	1.400	1.800
D	0.037	0.053	0.950	1.350
E	0.020	0.028	0.510	0.710
G	0.006	0.018	0.150	0.450
H	0.003	0.010	0.080	0.250
J	0.000	0.006	0.000	0.150
θ	0	8°	0	8°

■ Suggested Pad Layout

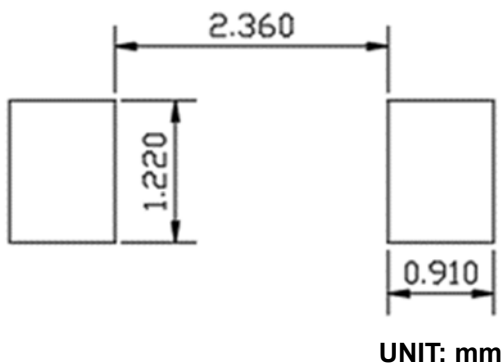

BAV19W THRU BAV21W

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.