


PNP Transistor

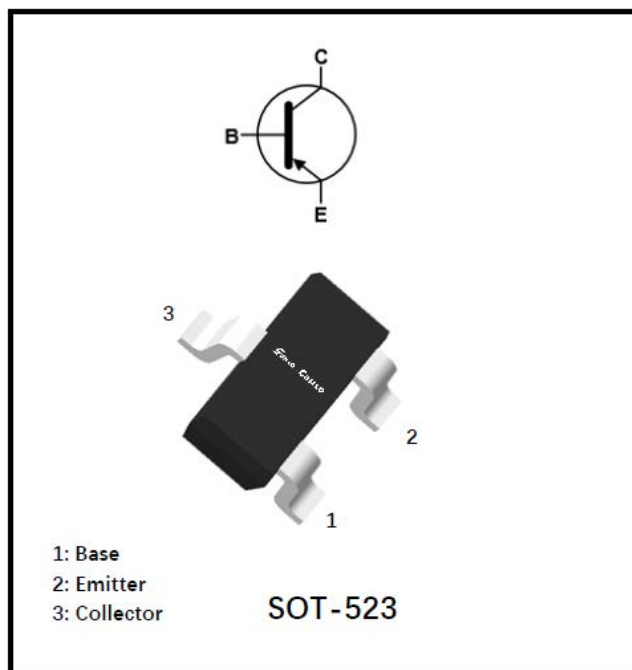

Features

- Moisture Sensitivity Level 1
- Surface mount package ideally Suited for Automatic Insertion
- Halogen-free

Mechanical Data

- **Package:** SOT-523
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:**

BC856AT	3A
BC856BT	3B
BC857AT	3E
BC857BT	3F
BC857CT	3G
BC858AT	3J
BC858BT	3K
BC858CT	3L

■Maximum Ratings (Ta=25°C Unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage BC856T BC857T BC858T	-80 -50 -30	V
V_{CEO}	Collector-Emitter Voltage BC856T BC857T BC858T	-65 -45 -30	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-100	mA
P_C	Collector Power Dissipation	150	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	833	°C/W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~+150	°C

BC856T/BC857T/BC858T


■Electrical Characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage BC856T BC857T BC858T	V_{CBO}	$I_C = -10\mu A, I_E = 0$	-80 -50 -30	-	V
Collector-emitter breakdown voltage BC856T BC857T BC858T	V_{CEO}	$I_C = -10mA, I_B = 0$	-65 -45 -30	-	V
Emitter-base breakdown voltage	V_{EBO}	$I_E = -1\mu A, I_C = 0$	-5	-	V
Collector-base cut-off current	I_{CBO}	$V_{CB} = -30V, I_E = 0$	-	-15	nA
Emitter-base cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$	-	-100	nA
DC current gain BC856A,857A,858A BC856B,857B,858B BC857C,BC858C	h_{FE}	$V_{CE} = -5V, I_C = -2mA$	125 220 420	250 475 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$	-	-0.3	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100mA, I_B = -5mA$	-	-0.65	V
Base-Emitter Voltage	V_{BEON}	$V_{CE} = -5V, I_C = -2mA$	-0.6	-0.75	V
Base-Emitter Voltage	V_{BEON}	$V_{CE} = -5V, I_C = -10mA$	-	-0.82	V
Transition frequency	f_T	$V_{CE} = -5V, I_C = -10mA$ $f = 100MHz$	100	-	MHz


■ Ordering Information (Example)

Prefered P/N	Packing Code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
BC856T/BC857T/BC858T	F2	Approximate 0.0027	3000	30000	120000	7" reel


■ Characteristics (Typical)

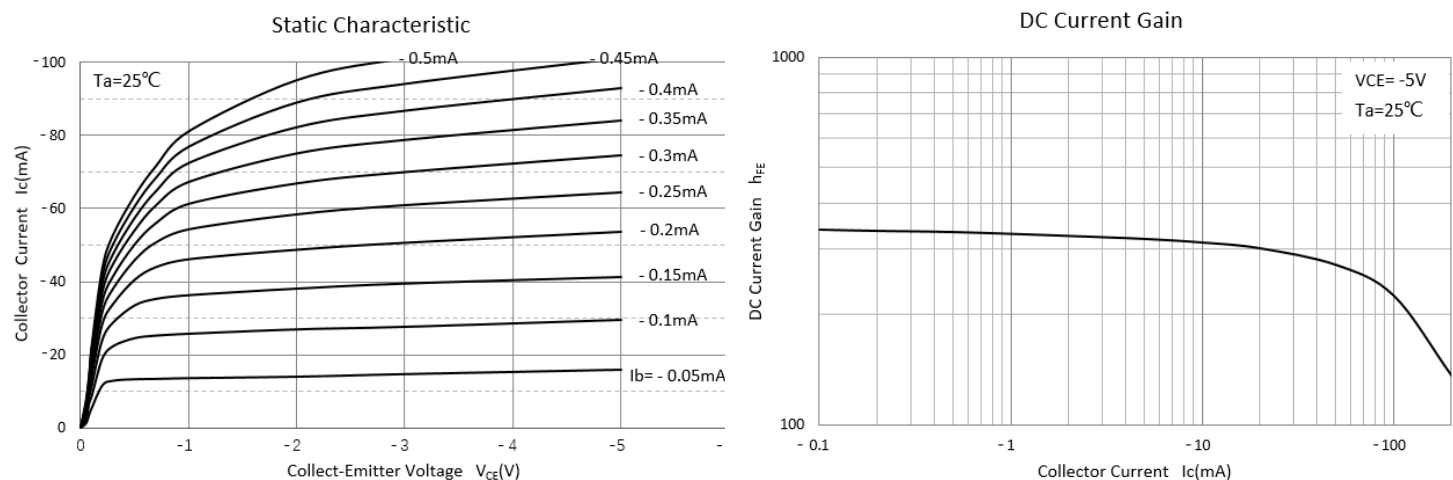


Collector-Emitter Saturation Voltage

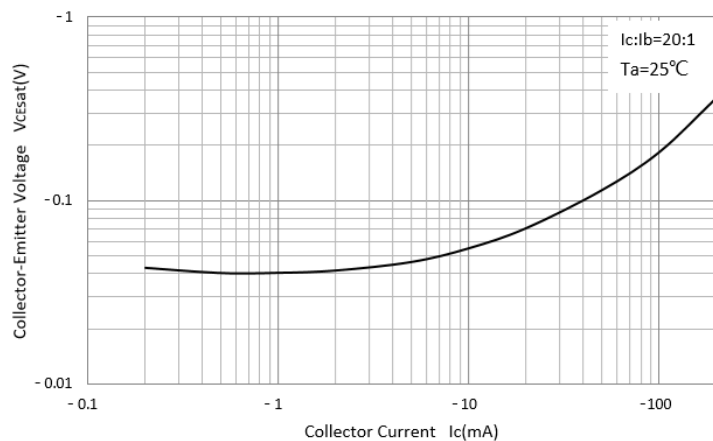


Base-Emitter Saturation Voltage

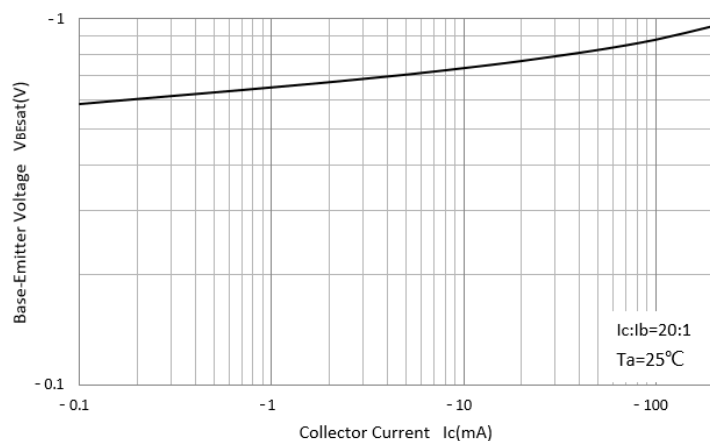


Base-Emitter On Voltage

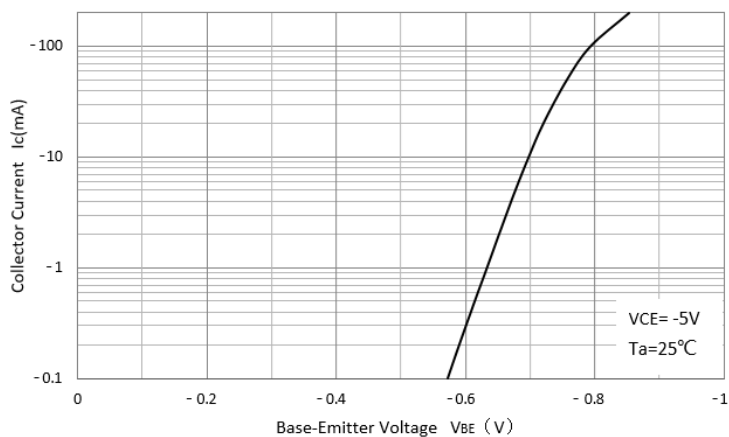

$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

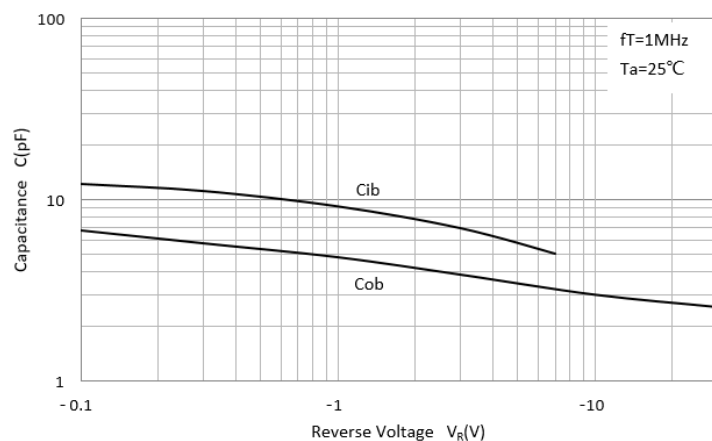


■ SOT-523 Package Outline Dimensions

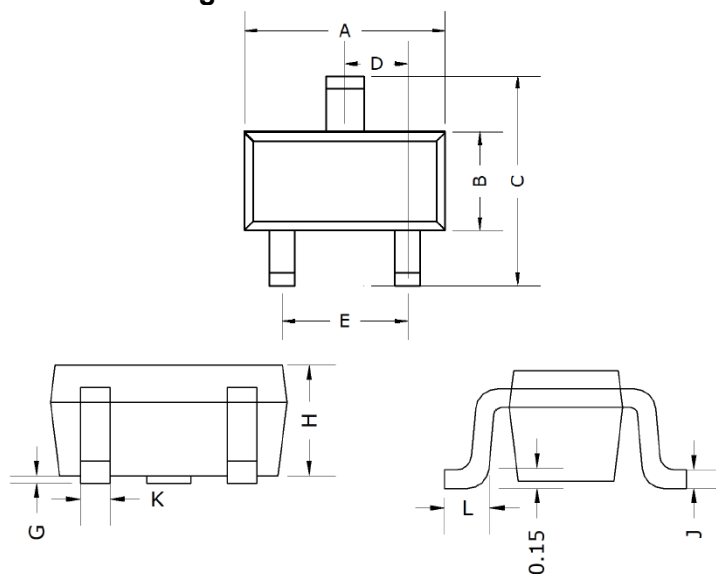

DIMENSIONS				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.059	0.067	1.50	1.70
B	0.030	0.033	0.75	0.85
C	0.057	0.069	1.45	1.75
D	0.020TYP		0.50TYP	
E	0.035	0.043	0.90	1.10
G	0.000	0.004	0.00	0.10
H	0.024	0.031	0.60	0.80
J	0.004	0.008	0.10	0.20
K	0.006	0.014	0.15	0.35
L	0.010	0.018	0.26	0.46

■ SOT-523 Suggested Pad Layout

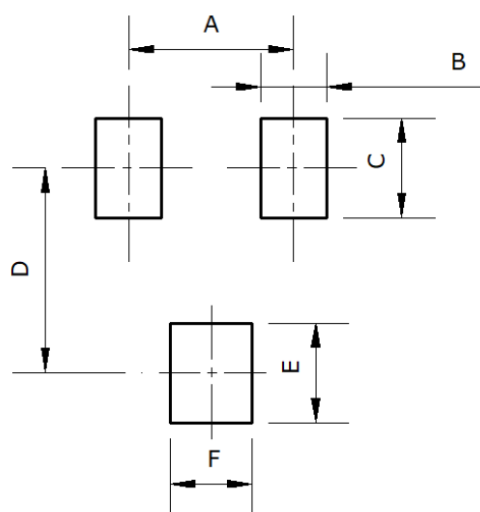

DIMENSIONS	
DIM	MM (TYP)
A	1.00
B	0.40
C	0.60
D	1.24
E	0.60
F	0.50

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.