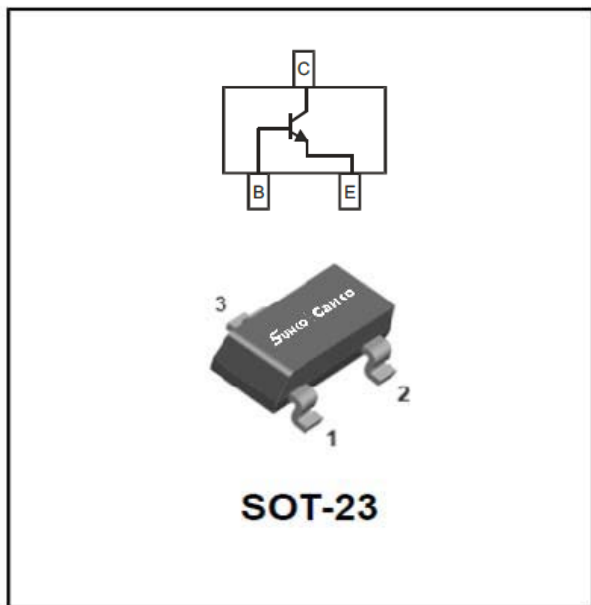


NPN Transistor

**Features**

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- High Conductance
- Surface mount package ideally Suited for Automatic Insertion

Mechanical Data

- **Package:** SOT-23
Molding compound meets UL 94 V-0 flammability rating, -compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 1P

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	75
Collector-Emitter Voltage	V_{CEO}	V	40
Emitter-Base Voltage	V_{EBO}	V	6
Collector Current	I_{C}	mA	600
Collector Power Dissipation	P_{C}	mW	300
Junction Temperature	T_{j}	$^{\circ}\text{C}$	150
Storage Temperature	T_{stg}	$^{\circ}\text{C}$	-55 to +150

MMBT2222A

■ Electrical Characteristics (Ta=25°C unless otherwise noted)


Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V_{CBO}	V	$I_C=10\mu A, I_E=0$	75		
Collector-emitter breakdown voltage	V_{CEO^*}	V	$I_C=10mA, I_B=0$	40		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E=10\mu A, I_C=0$	6		
Collector-emitter cut-off current	I_{CEX}	nA	$V_{CE}=60V, V_{EB}=3V$			10
Collector-base cut-off current	I_{CBO}	nA	$V_{CB}=60V, I_E=0$			100
Emitter-base cut-off current	I_{EBO}	nA	$V_{EB}=3V, I_C=0$			100
DC current gain	h_{FE}		$V_{CE}=10V, I_C=0.1mA$	35		
	h_{FE}		$V_{CE}=10V, I_C=1mA$	50		
	h_{FE}		$V_{CE}=10V, I_C=10mA$	80		
	h_{FE}		$V_{CE}=10V, I_C=150mA$	100		300
	h_{FE}		$V_{CE}=1V, I_C=150mA$	50		
	h_{FE}		$V_{CE}=10V, I_C=500mA$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C=150mA, I_B=15mA$			0.3
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C=150mA, I_B=15mA$	0.6		1.2
Transition frequency	f_T	MHz	$V_{CE}=20V, I_C=20mA, f=100MHz$	300		
Delay time	t_d	ns	$V_{CC}=30V, V_{BE(off)}=-0.5V$ $I_C=150mA, I_{B1}=15mA$			15
Rise time	t_r	ns				25
Storage time	t_s	ns	$V_{CC}=30V, I_C=150mA, I_{B1}=I_{B2}=15mA$			225
Fall time	t_f	ns				60

■ Ordering Information (Example)


PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBT2222A	F2	Approximate 0.008	3000	30000	120000	7" reel
MMBT2222A	F4	Approximate 0.008	10000	/	210000	13" reel

■ Characteristics (Typical)


Static Characteristic

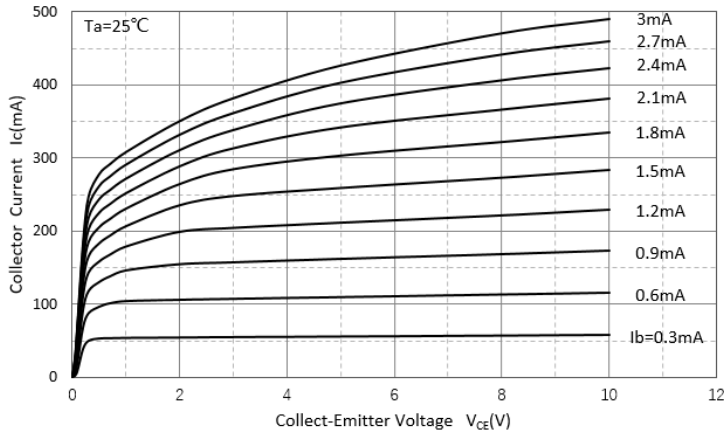


DC Current Gain

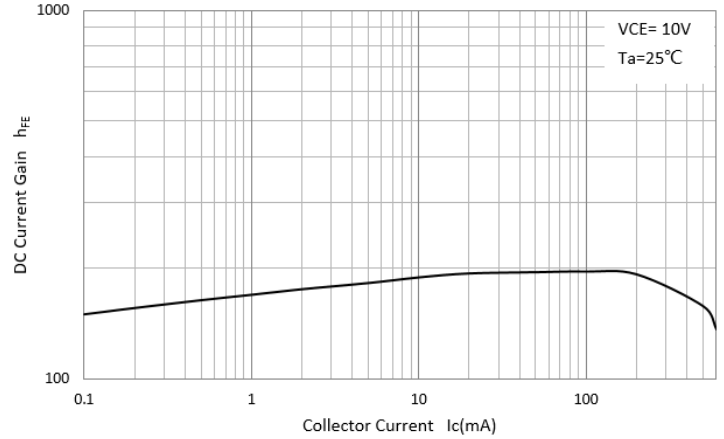


Collector-Emittor Saturation Voltage

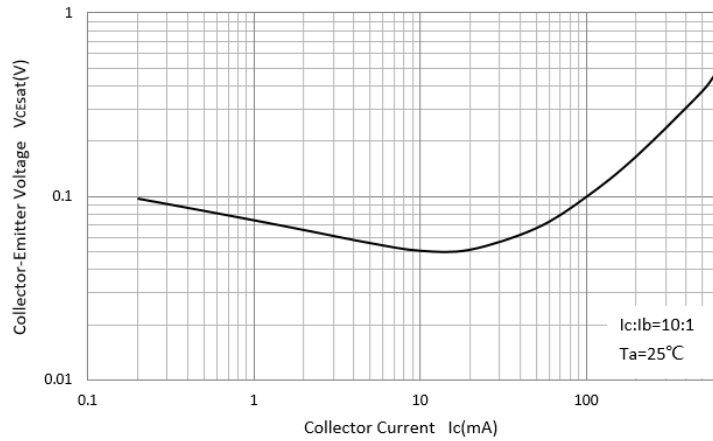


Base-Emittor Saturation Voltage

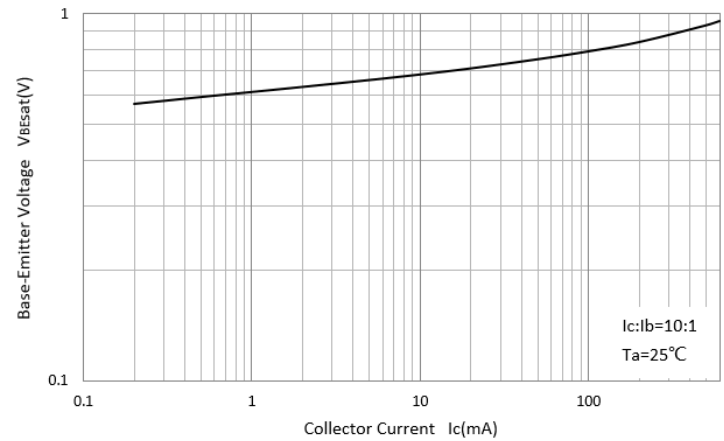




Base-Emittor On Voltage

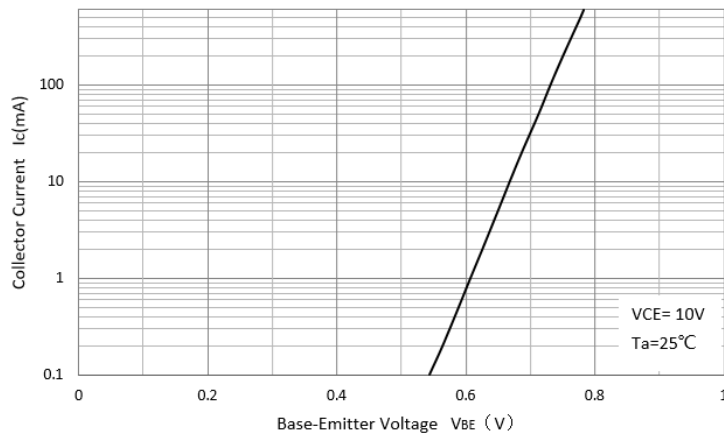

$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

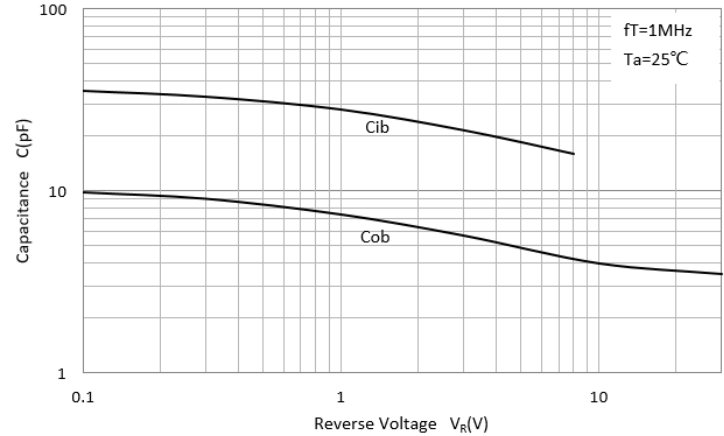


■SOT-23 Package Outline Dimensions



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

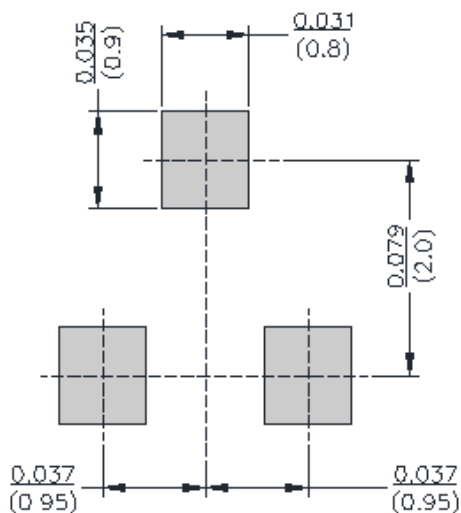

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.