


PNP Silicon High Voltage Transistor

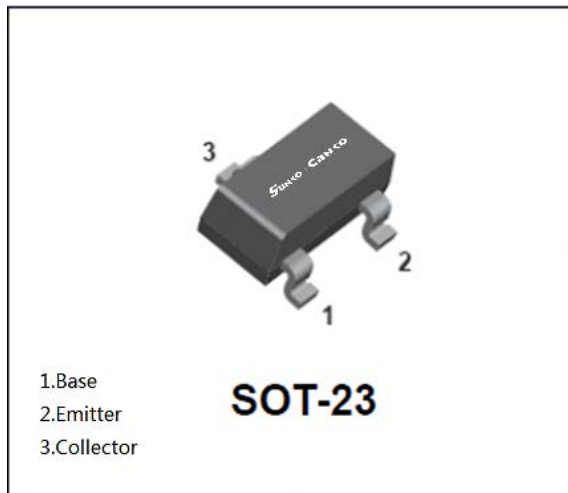

Features

- Epoxy meets UL-94 V-0 flammability rating
- Halogen free available upon request by adding suffix "HF"
- Moisture Sensitivity Level 1
- Surface mount package ideally Suited for Automatic Insertion
- PNP

Mechanical Data

- **Package:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 2D

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Base Voltage	V_{CBO}	V	$I_C = -100\mu A, I_E = 0$	-300
Collector-Emitter Voltage	V_{CEO}	V	$I_C = -1mA, I_B = 0$	-300
Emitter-Base Voltage	V_{EBO}	V	$I_E = -100\mu A, I_C = 0$	-5
Collector Current	I_C	mA		-300
Collector Power Dissipation	P_C	mW		300
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	°C/W		417
Operation Junction Temperature	T_J	°C		-55 to +150
Storage Temperature	T_{stg}	°C		-55 to +150

■Other Characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Max
Transition frequency	F_t	MHz	$V_{CE} = -20V, I_C = -10mA, f = 30MHz$	50	





■Ordering Information (Example)




PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBTA92	F2	Approximate 0.009	3000	30000	120000	7" reel

■Electrical Characteristics (T_a=25°C Unless otherwise specified)




Item	Symbol	Unit	Conditions	Min	Max
Collector-base breakdown voltage	V _{CBO}	V	I _C =-100μA, I _E =0	-300	
Collector-emitter breakdown voltage	V _{CEO}	V	I _C =-1mA, I _B =0	-300	
Emitter-base breakdown voltage	V _{EBO}	V	I _E =-100μA, I _C =0	-5	
Collector-base cut-off current	I _{CBO}	nA	V _{CB} =-200V, I _E =0		-250
Emitter-base cut-off current	I _{EBO}	nA	V _{EB} =-5V, I _C =0		-100
DC current gain	h _{FE}		V _{CE} =-10V, I _C =-1mA	60	
	h _{FE}		V _{CE} =-10V, I _C =-10mA	100	200
	h _{FE}		V _{CE} =-10V, I _C =-30mA	60	
Collector-emitter saturation voltage	V _{CE(sat)}	V	I _C =-20mA, I _B =-2mA		-0.2
Base-emitter saturation voltage	V _{BE(sat)} *	V	I _C =-20mA, I _B =-2mA		-0.9

■Characteristics(Typical)

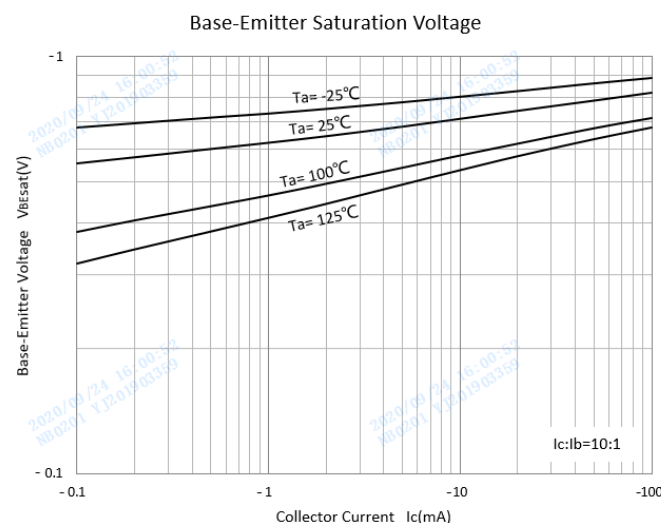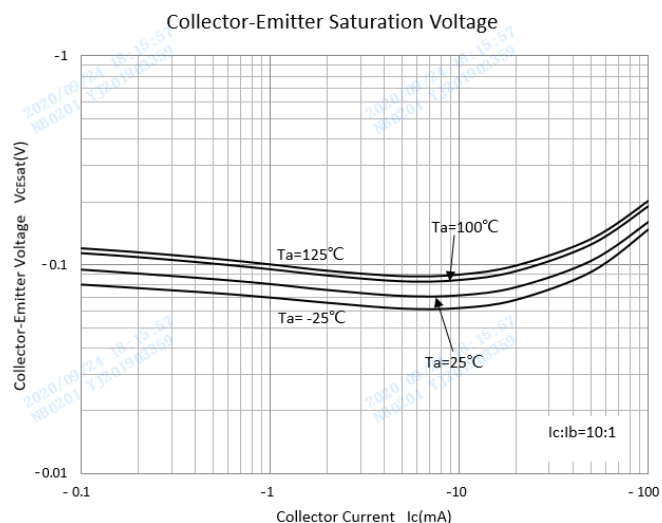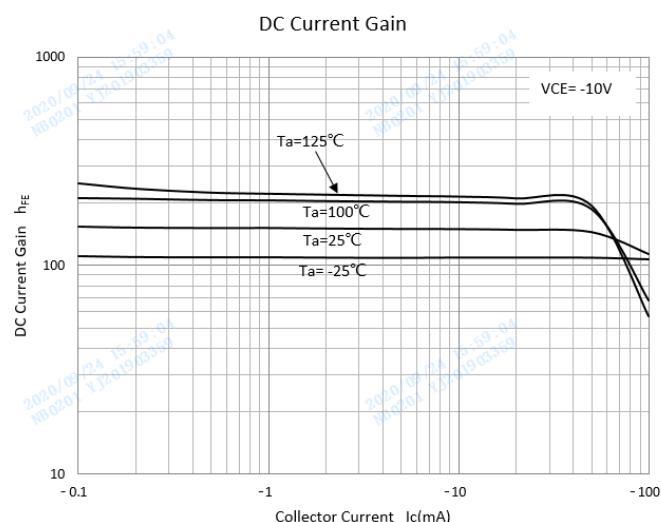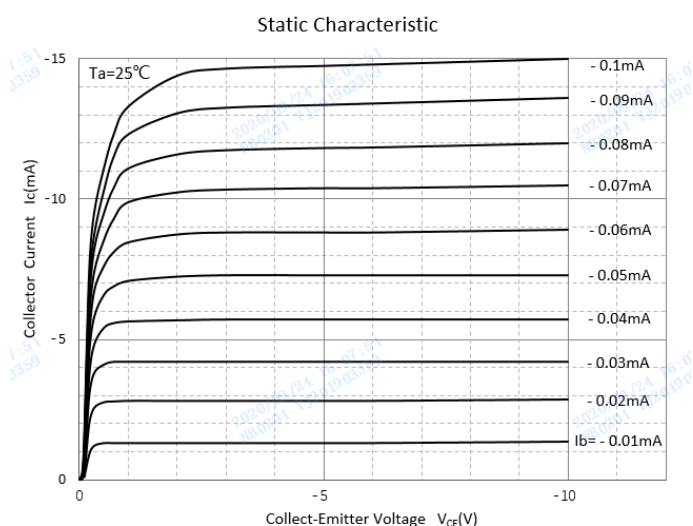

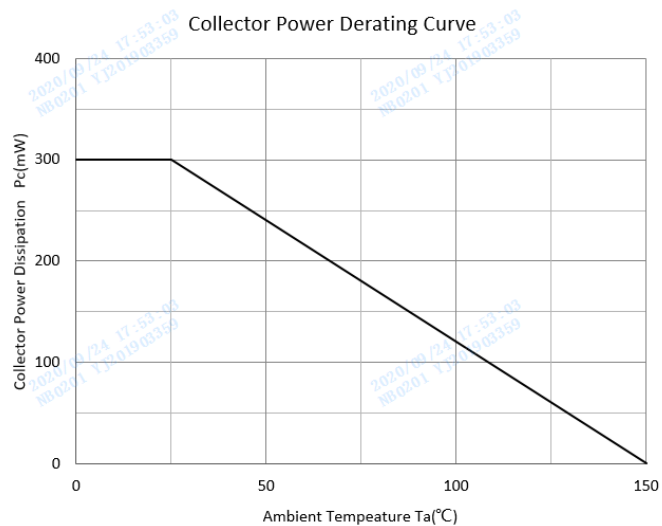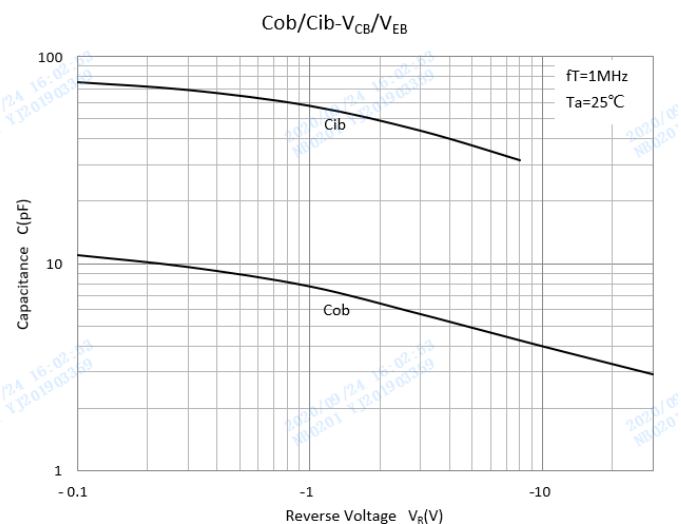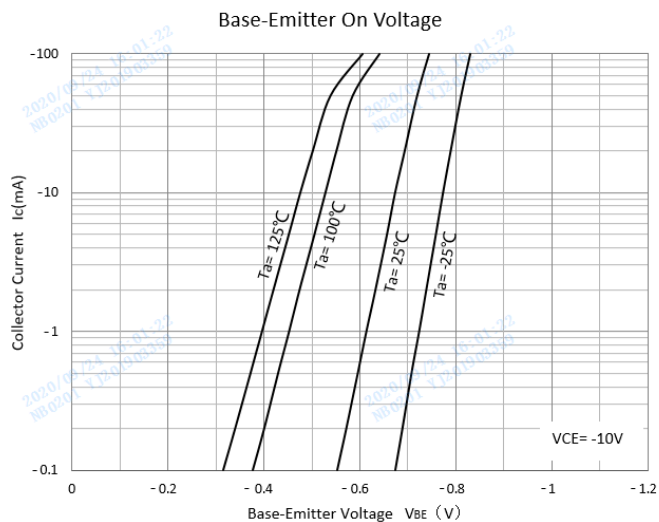


■SOT-23 Package Outline Dimensions



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

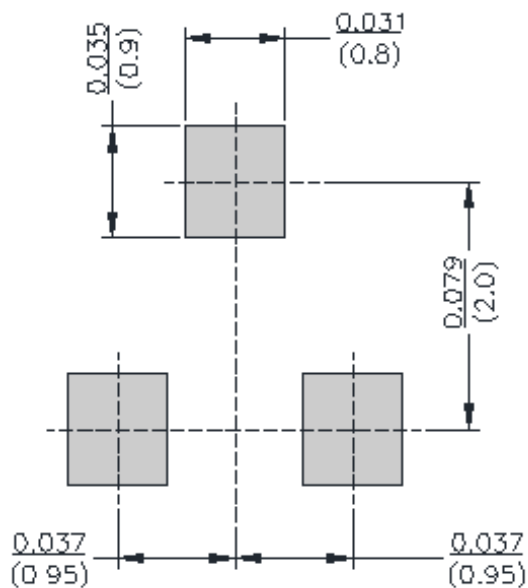

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.