



ESD Protection Diode

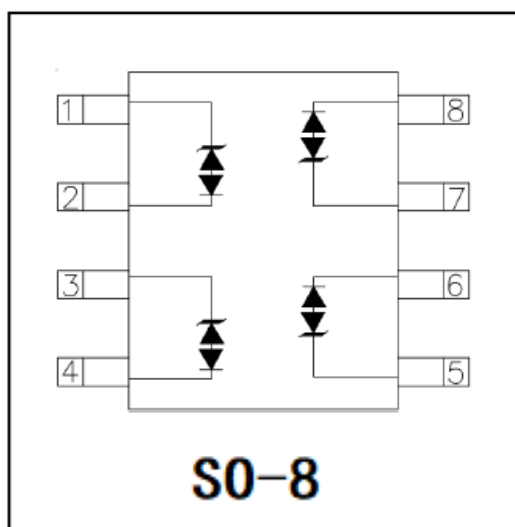

Features

- Protects two line pairs (four lines)
- Ultra low leakage: nA level
- Low operating voltage: 2.8V
- Moisture Sensitivity: Level 3 per J-STD-020
- JEDEC SO-8 package
- Marking:



2804 = Device Marking Code
Dot denotes Pin1

■Maximum Ratings (TA=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Operating Temperature Range	T_J	-55 to +125	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
IEC61000-4-2(ESD)Air	V_{ESD}	±30	KV
IEC61000-4-2(ESD)Contact		±30	KV
Peak Pulse Power	P_{PK}	100	W
Peak Pulse Current	I_{PP}	10	A


■Electrical Characteristics (TA=25°C Unless otherwise specified)

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
Reverse Working Voltage	V_{RWM}	V				2.8
Reverse Leakage Current	I_R	uA	$V_{RWM}=2.8V$			0.05
Punch-Through Voltage	$V_{(PT)}$	V	$I_T=2uA$	3.5		
Snap-Back Voltage	$V_{(SB)}$	V	$I_T=1mA$	2.8		
Clamping Voltage	V_C	V	$I_{PP}=1A(8 \times 20\mu s \text{ pulse})$			5.5
Clamping Voltage	V_C	V	$I_{PP}=10A(8 \times 20\mu s \text{ pulse})$			10
Variation in Capacitance With reverse Bias		pF	Pin 1,8 to 2,7 and 3,6 to 4,5 $V_R=0 \text{ to } 2.8V \text{ } f=1MHz$		1.3	
Junction Capacitance	C_J	pF	Pin 1,8 to 2,7 and 3,6 to 4,5 $V_R= 2.8V \text{ } f=1MHz$		4.5	6


■ Thermal Characteristics (T_a=25℃ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	AU2804S8
Thermal Resistance(Typical)	R _{θJA}	℃/W	184
	R _{θJC}	℃/W	74



■ Characteristics (Typical)

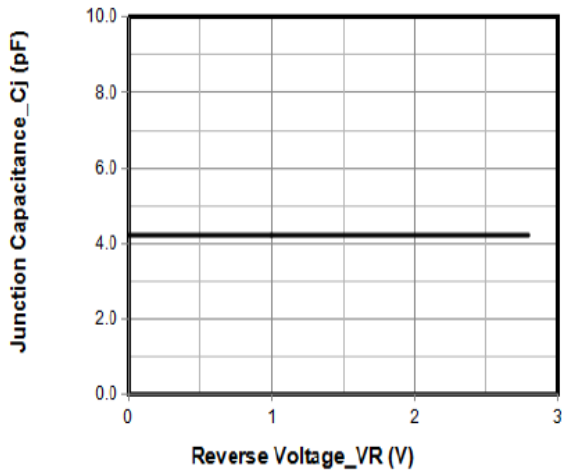


Junction Capacitance vs. Reverse Voltage

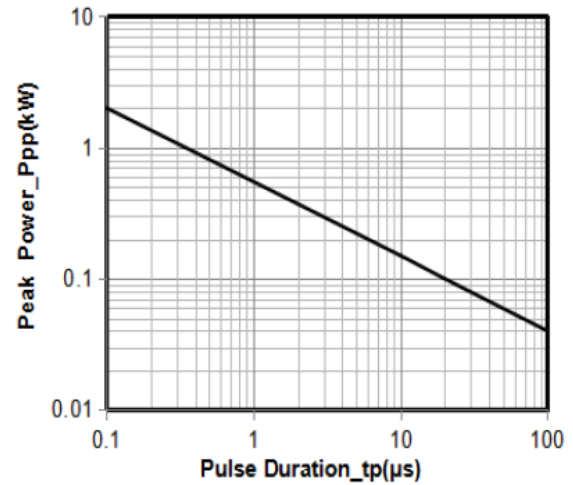


Peak Pulse Power vs. Pulse Time

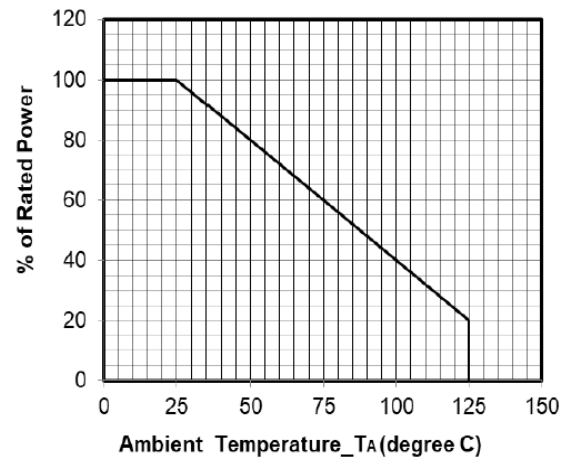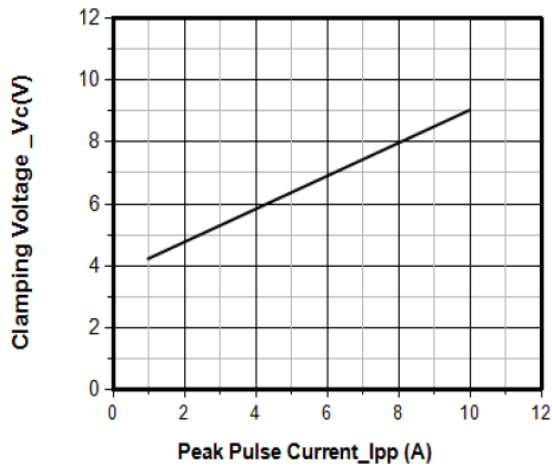

Power Derating Curve

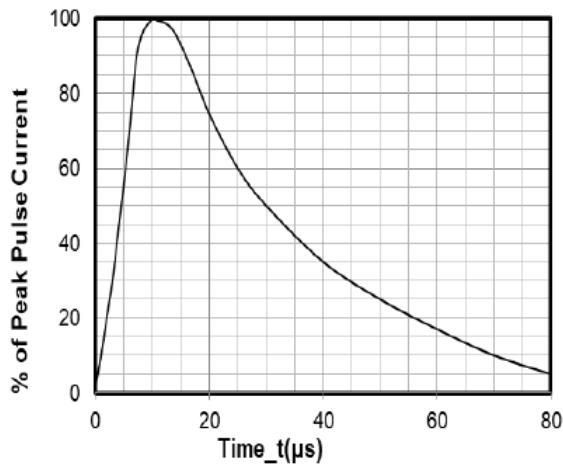

8 X 20 μ s Pulse Waveform

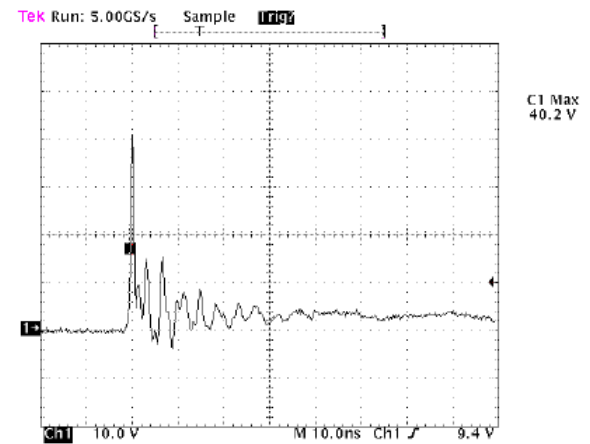


Note: Data is taken with a 10x attenuator

ESD Clamping Voltage


8 kV Contact per IEC61000-4-2

■ Outline Dimensions

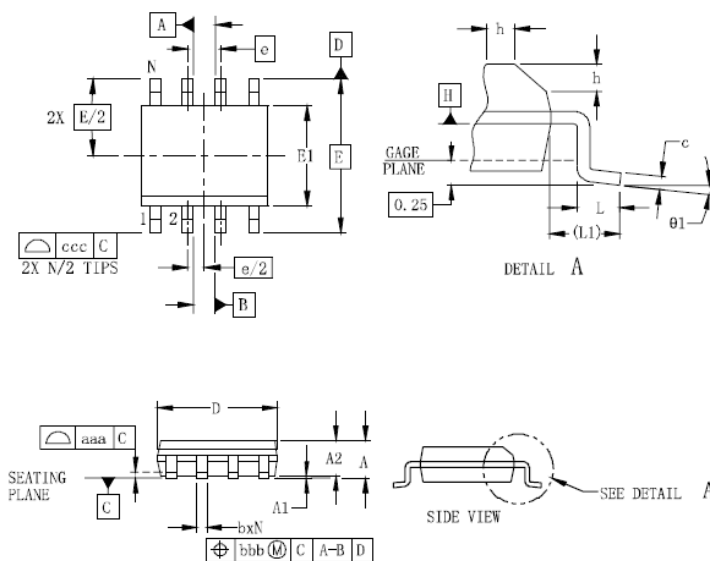

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35		1.75	0.053		0.069
A1	0.10		0.25	0.004		0.010
A2	1.25		1.65	0.049		0.065
b	0.31		0.51	0.012		0.020
c	0.17		0.25	0.007		0.010
D	4.80	4.90	5.00	0.189	0.193	0.197
E1	3.80	3.90	4.00	0.150	0.154	0.157
E	6.00 BSC			0.236 BSC		
e	1.27 BSC			0.050 BSC		
h	0.25		0.50	0.010		0.020
L	0.40	0.72	1.04	0.016	0.028	0.041
L1	(1.04)			(0.041)		
N	8			8		
$\theta 1$	0°		8°	0°		8°
aa	0.10			0.004		
bb	0.25			0.010		
ccc	0.20			0.008		

■ Soldering Footprint



SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	(5.20)	0.205
G	3.00	0.118
P	1.27	0.050
X	0.60	0.024
Y	2.20	0.087
Z	7.40	0.291

Disclaimer

The information presented in this document is for reference only. Shanghai Sunco Electronics Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Russiansunco or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.russiansunco.com](http://www.russiansunco.com) , or consult your nearest Russiansunco's sales office for further assistance.